Reflections on Image-Based Rendering

Richard Szeliski

The University of Washington

TUM AI Guest Lecture Series

January 28, 2021

Reflections on [25 years of] Image-Based Rendering

Richard Szeliski

The University of Washington

TUM AI Guest Lecture Series

January 28, 2021

CVPR 2020 Tutorial on

Novel View Synthesis: From Depth-Based Warping to Multi-Plane Images and Beyond

Novel view synthesis is a long-standing problem at the intersection of computer graphics and computer vision. Seminal work in this field dates back to the 1990s, with early methods proposing to interpolate either between corresponding pixels from the input images, or between rays in space. Recent deep learning methods enabled tremendous improvements to the quality of the results, and brought renewed popularity to the field. The teaser above shows novel view synthesis from different recent methods. *From left to right: Yoon et al. [1], Mildenhall et al. [2], Wiles et al. [3], and Choi et al. [4]. Images and videos courtesy of the respective authors.*

New edition of my book – almost done

Computer Vision: Algorithms and Applications, 2nd ed.

© 2021 Richard Szeliski, Facebook

https://szeliski.org/Book

New edition of my book



1 Introduction 1

What is computer vision? • A brief history • Book overview • Sample syllabus • Notation



2 Image formation 33

Geometric primitives and transformations • Photometric image formation • The digital camera

3 Image processing 105

Point operators • Linear filtering • Non-linear filtering • Fourier transforms • Pyramids and wavelets • Geometric transformations

4 Model fitting and optimization 187

Scattered data interpolation • Variational methods and regularization • Markov random fields



5 Deep learning 231

Supervised learning • Unsupervised learning • Deep neural networks • Convolutional networks • More complex models

6 Recognition 325

Instance recognition • Image classification • Object detection • Semantic segmentation • Video understanding • Vision and language

7 Feature detection and matching 395

Points and patches • Edges and contours • Contour tracking • Lines and vanishing points • Segmentation



8 Image alignment and stitching 485

Pairwise alignment • Image stitching • Global alignment • Compositing

9 Motion estimation 537

Translational alignment • Parametric motion • Optical flow • • Layered motion



10 Computational photography 589

Photometric calibration • High dynamic range imaging • Super-resolution and blur removal • Image matting and compositing • Texture analysis and synthesis

11 Structure from motion and SLAM 663

Geometric intrinsic calibration • Pose estimation • Two-frame structure from motion • Multi-frame structure from motion • Simultaneous localization and mapping (SLAM)



12 Depth estimation 729

Epipolar geometry • Sparse correspondence • Dense correspondence • Local methods • Global optimization • Deep networks • Multi-view stereo • Monocular depth estimation

13 3D reconstruction 783

Shape from X • 3D scanning • Surface representations • Point-based representations • Volumetric representations • Model-based reconstruction • Recovering texture maps and albedos



14 Image-based rendering 837

View interpolation • Layered depth images • Light fields and Lumigraphs • Environment mattes • Video-based rendering • Neural rendering

Outline

- Multi-view stereo
- Image-Based Rendering
  - Lumigraphs, Light Fields, Sprites with Depth, and Layers
- Virtual Viewpoint Video
- 360° and 3D Video
- 3D Photos
- Reflections and transparency
- Neural rendering

Multi-view Stereo

View Interpolation

- Given two images with correspondences, *morph* (warp and cross-dissolve) between them [Chen & Williams, SIGGRAPH'93]

input

depth image

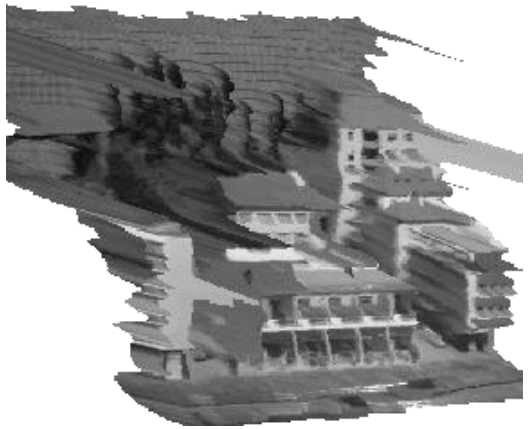

novel view

[Matthies,Szeliski,Kanade'88]

View Morphing

- Morph between pair of images using epipolar geometry [Seitz & Dyer, SIGGRAPH'96]

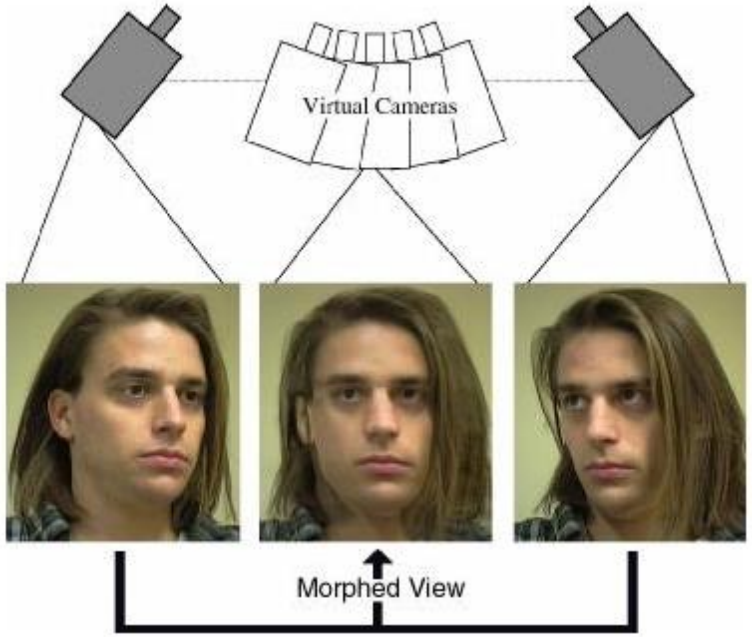

Video view interpolation

Interactive 3D video scenarios

- Sports events, e.g., CMU's 30-camera "EyeVision" system at SuperBowl XXXV) and 2016
- Concert performances,
  plays, circus acts
- Games
- Instructional video,
  e.g., golf, skating, martial arts
- Interactive (Internet) video

Plane Sweep Stereo

- Sweep family of planes through volume

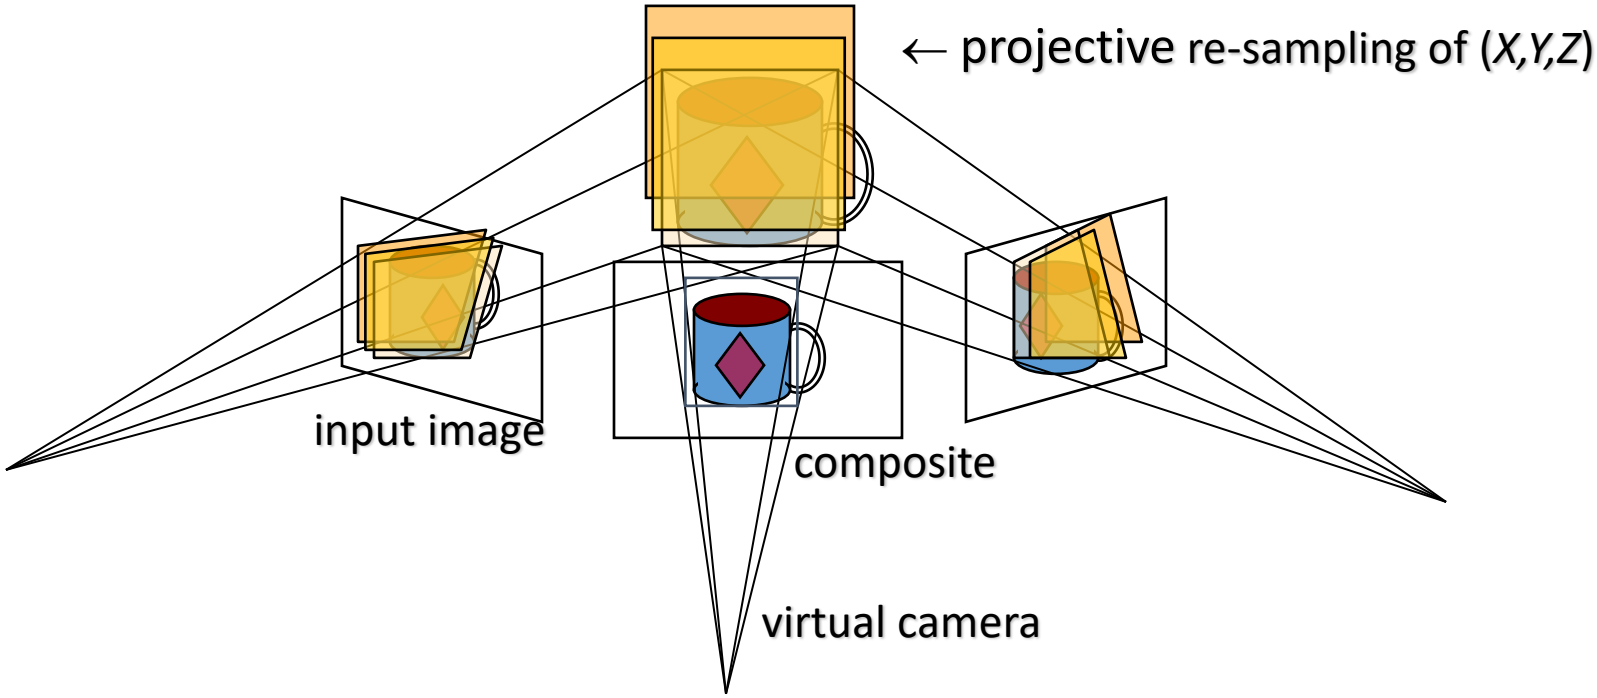

- each plane defines an image ⇒ composite homography

Plane Sweep Stereo

- For each depth plane
  - compute composite (mosaic) image — *mean*

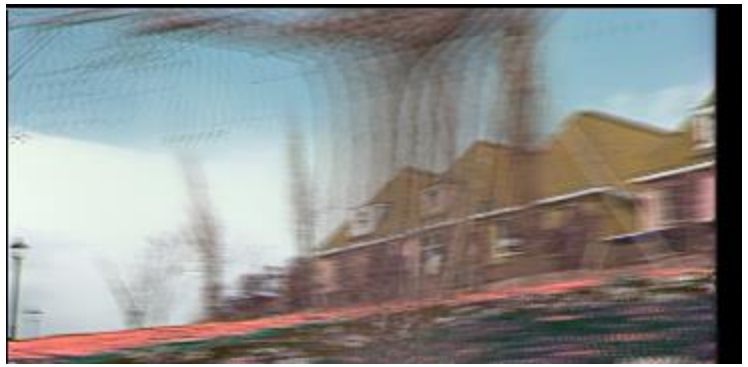

  - compute error image — *variance*
  - convert to confidence and aggregate spatially
- Select winning depth at each pixel

Plane sweep stereo

- Re-order (pixel / disparity) evaluation loops

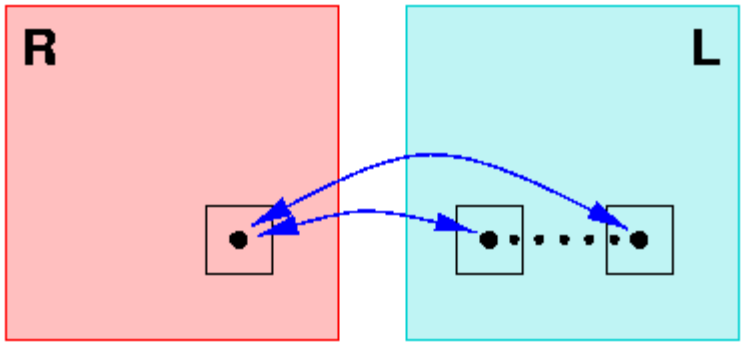

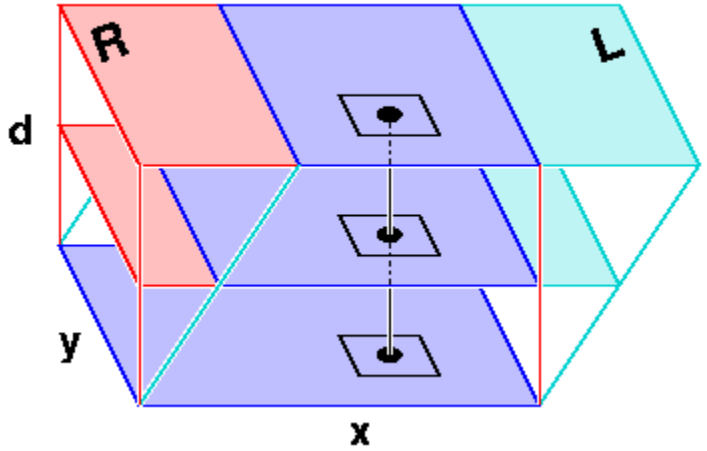

for every pixel,
for every disparity
compute cost

for every disparity
for every pixel
compute cost

Image-Based Rendering

Computer Graphics

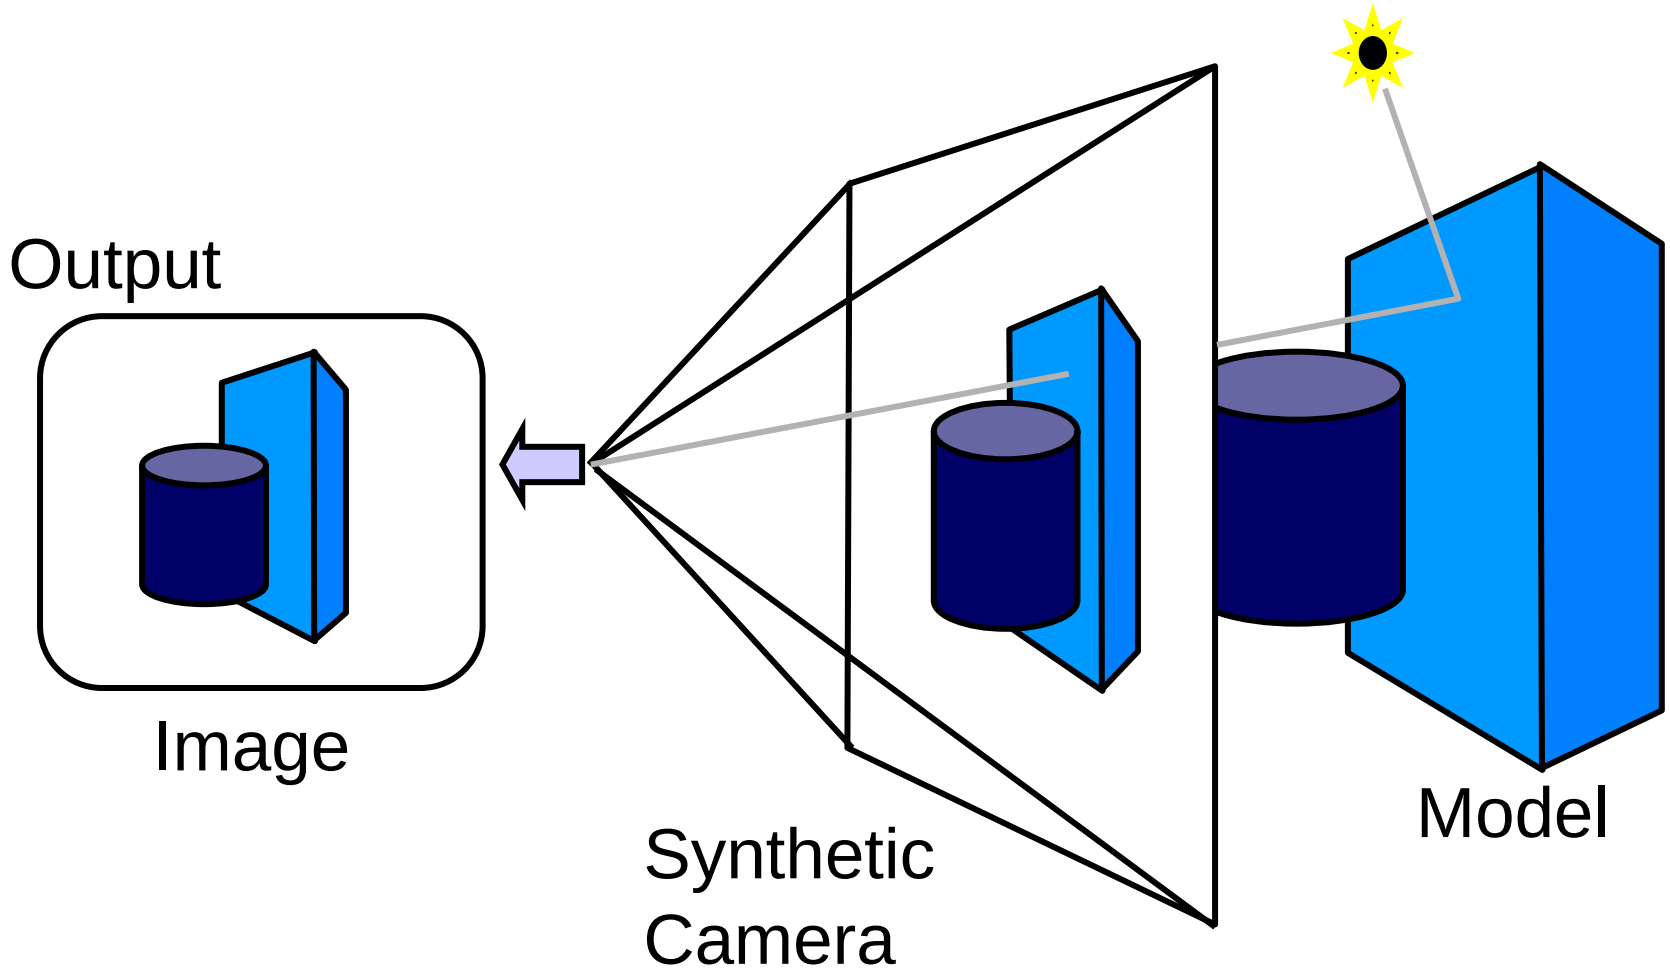

Computer Vision

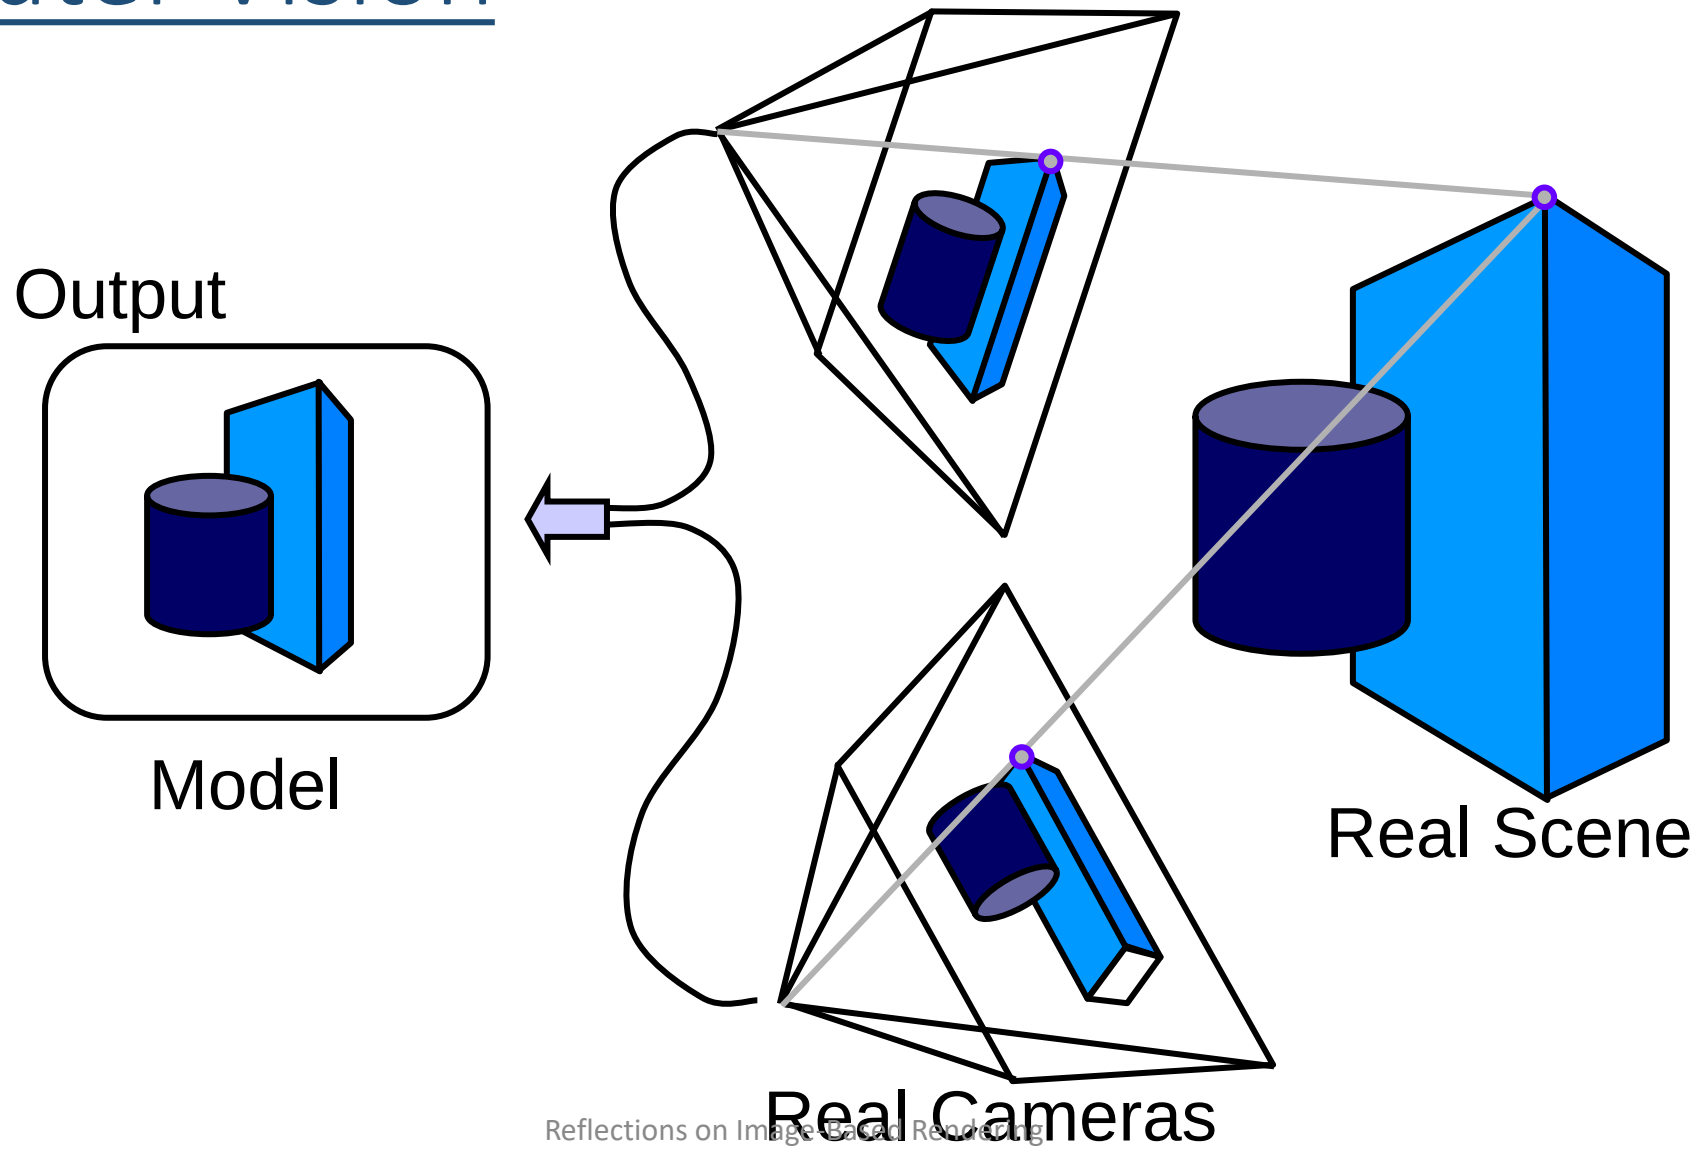

But, vision technology fails

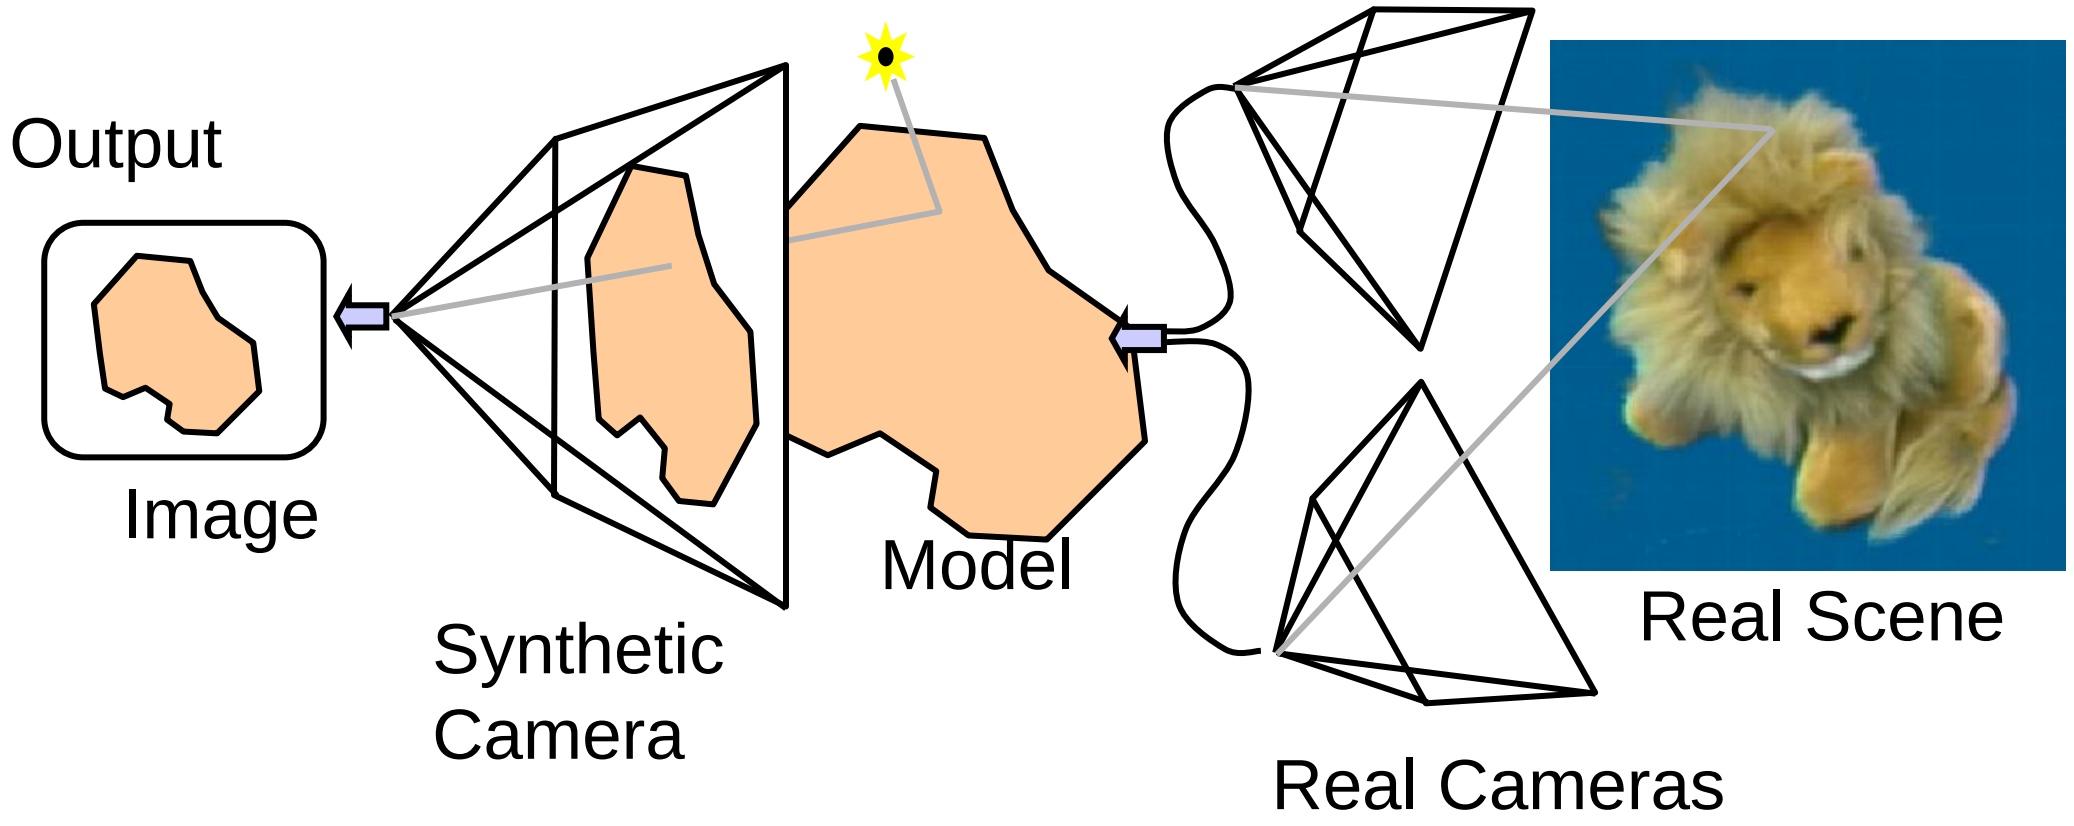

…and so does graphics

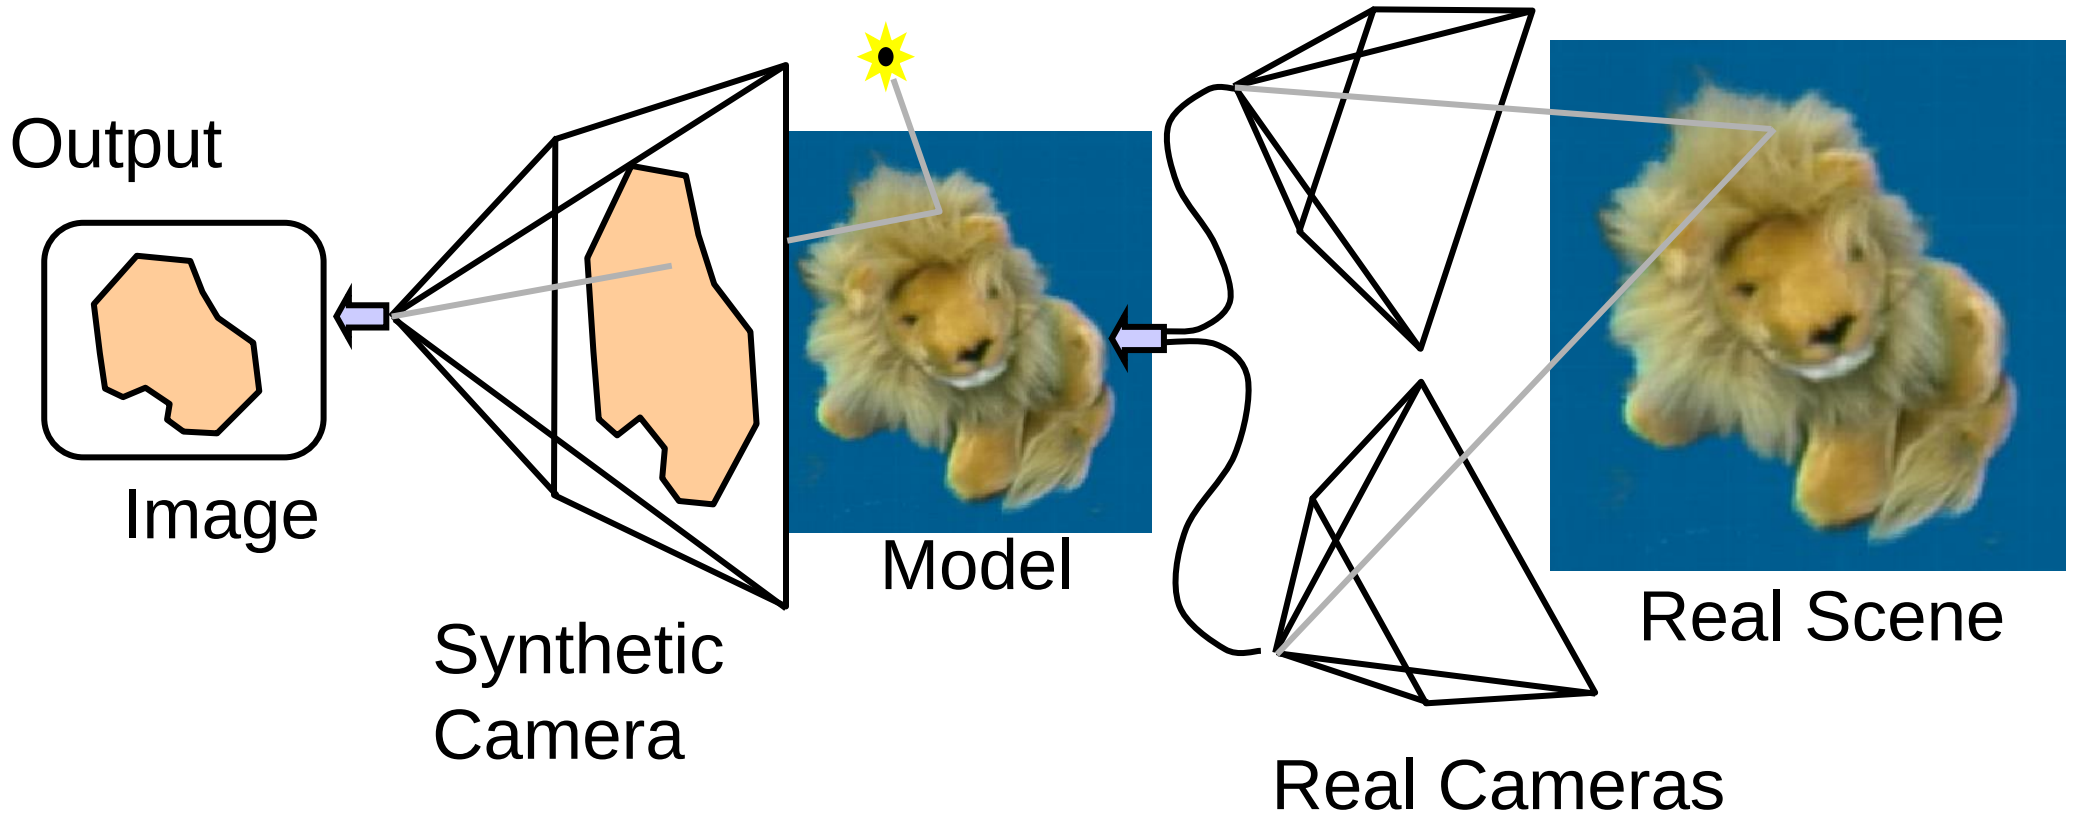

Image-Based Rendering

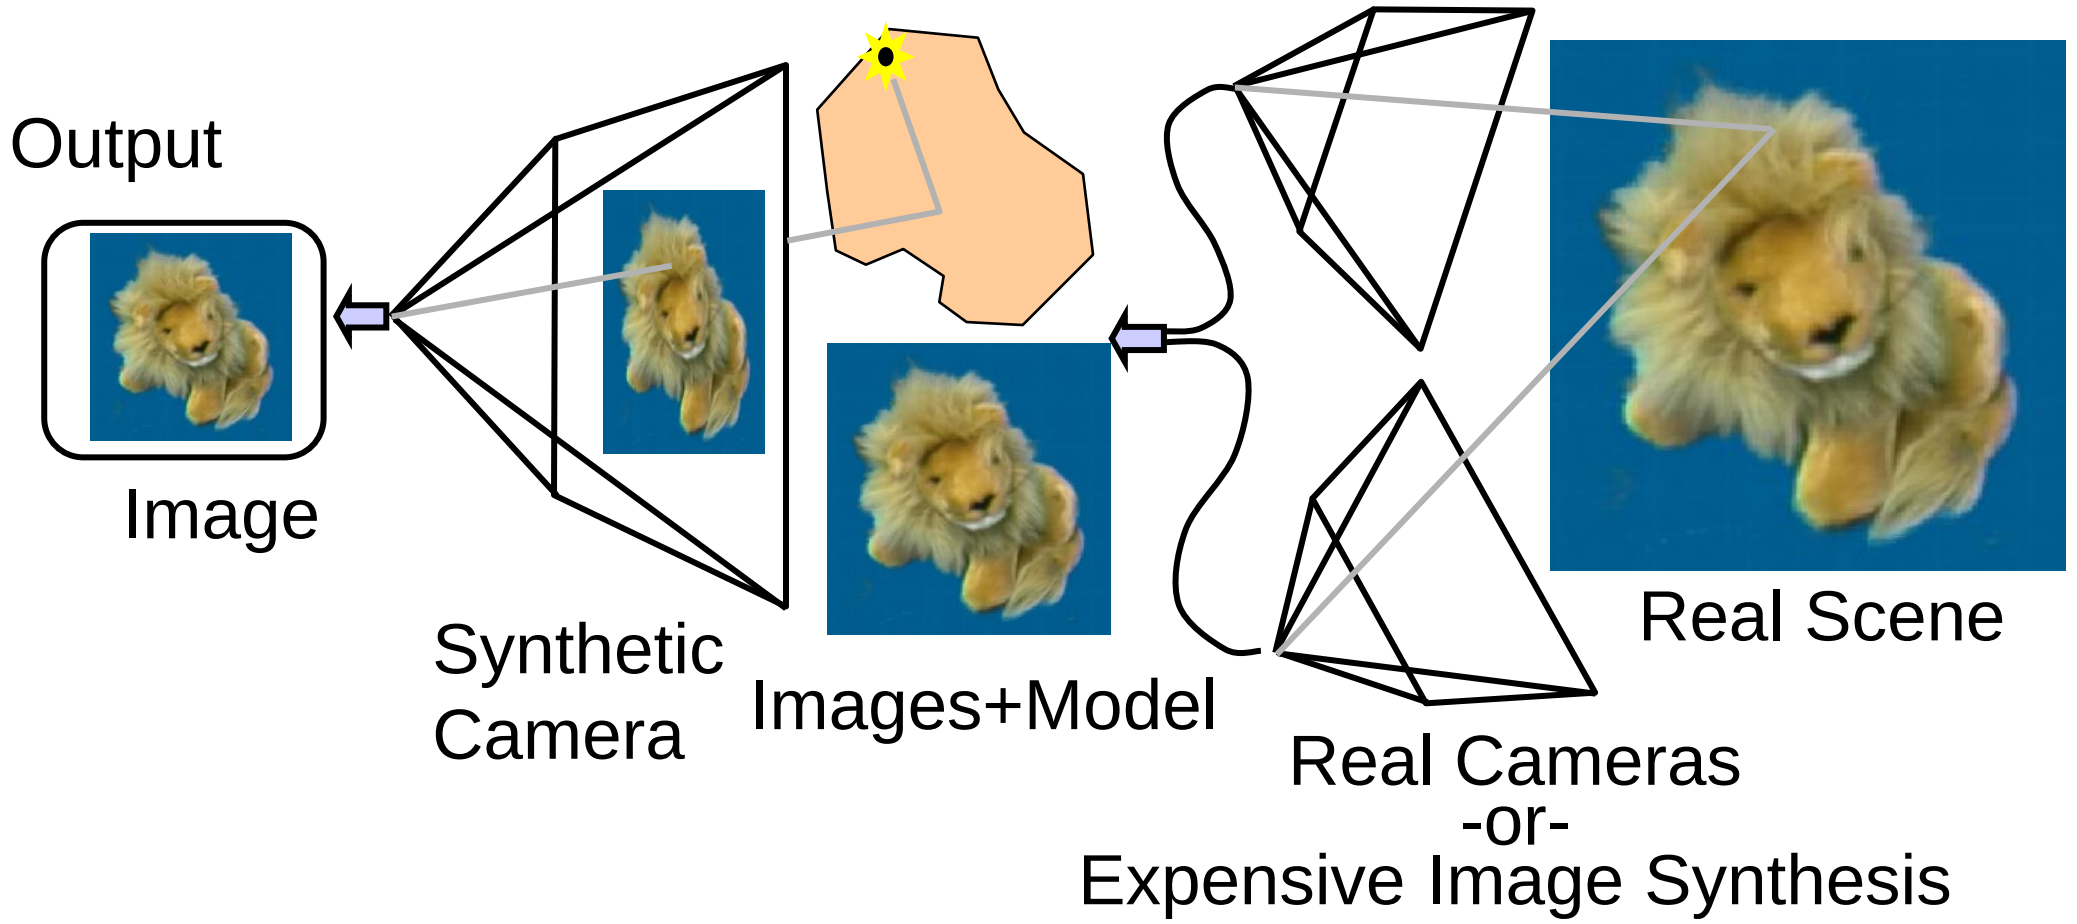

Lumigraph / Light Field [1996]

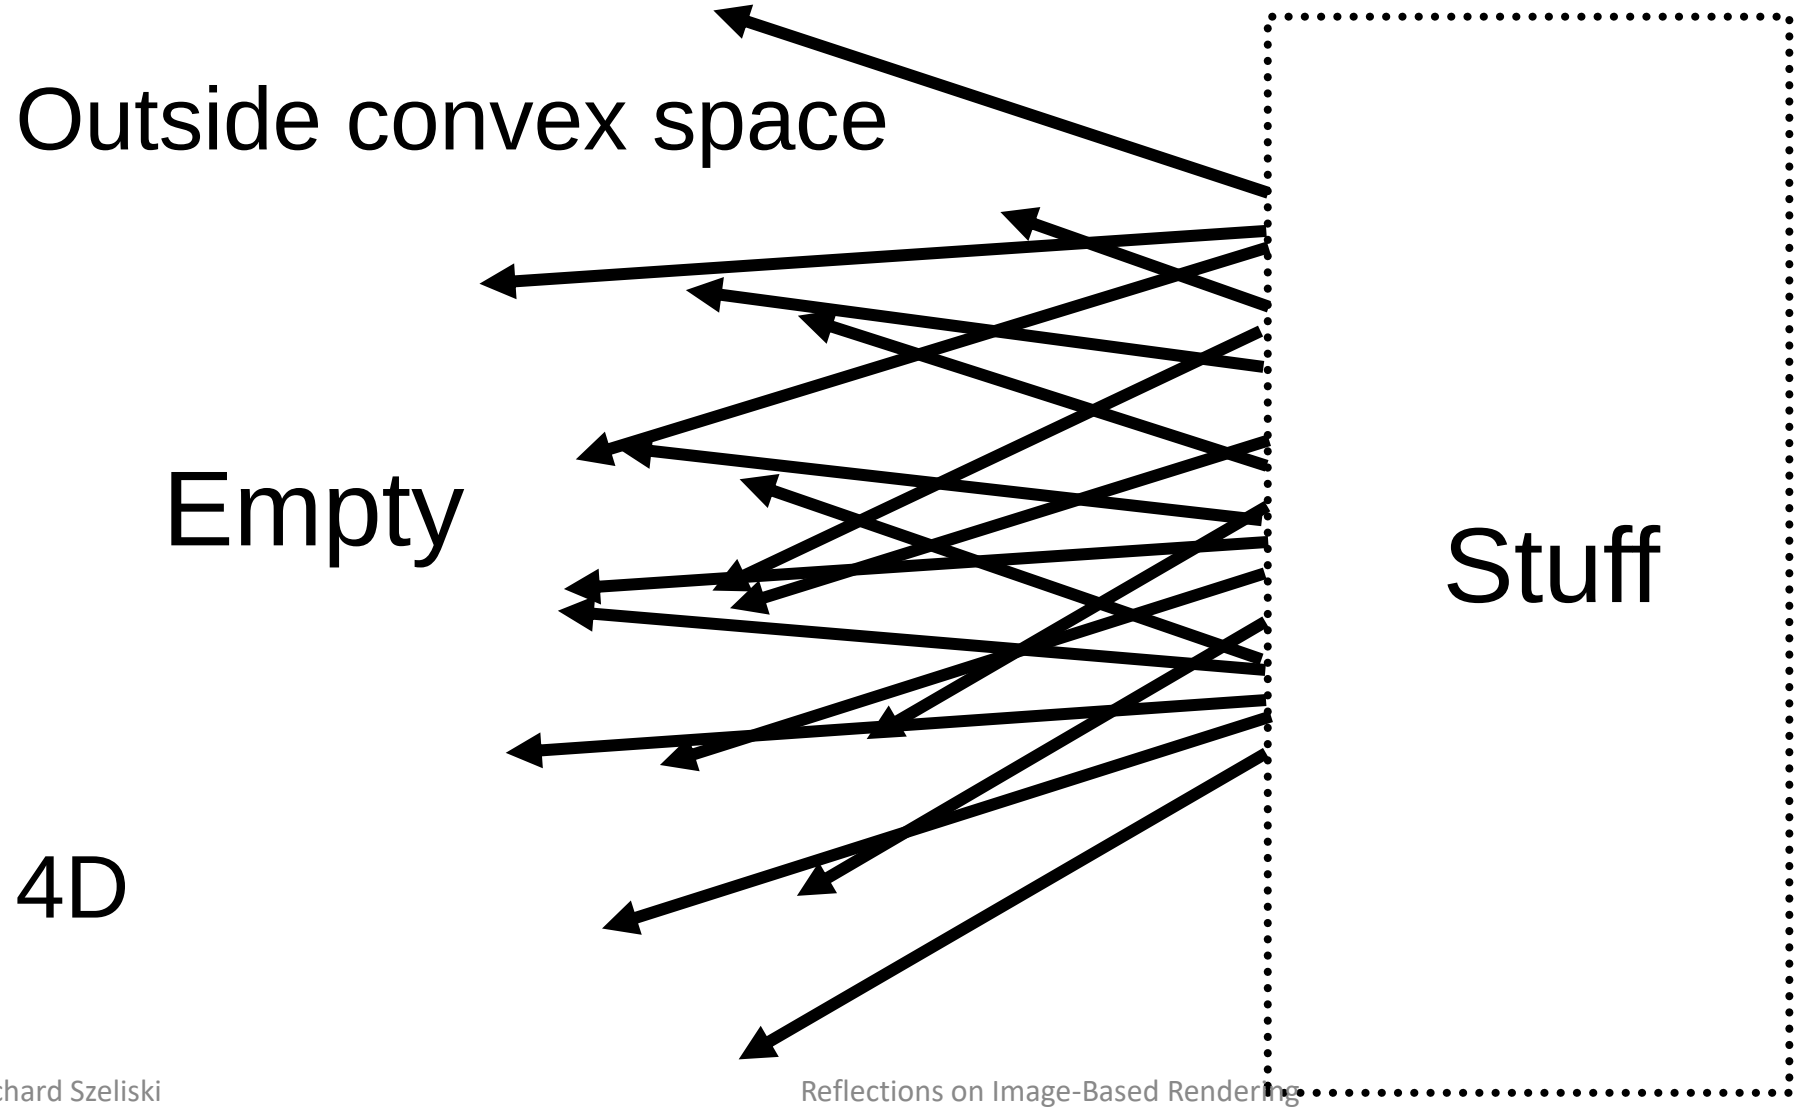

Lumigraph – Capture

- Convert images into a solid 3D model

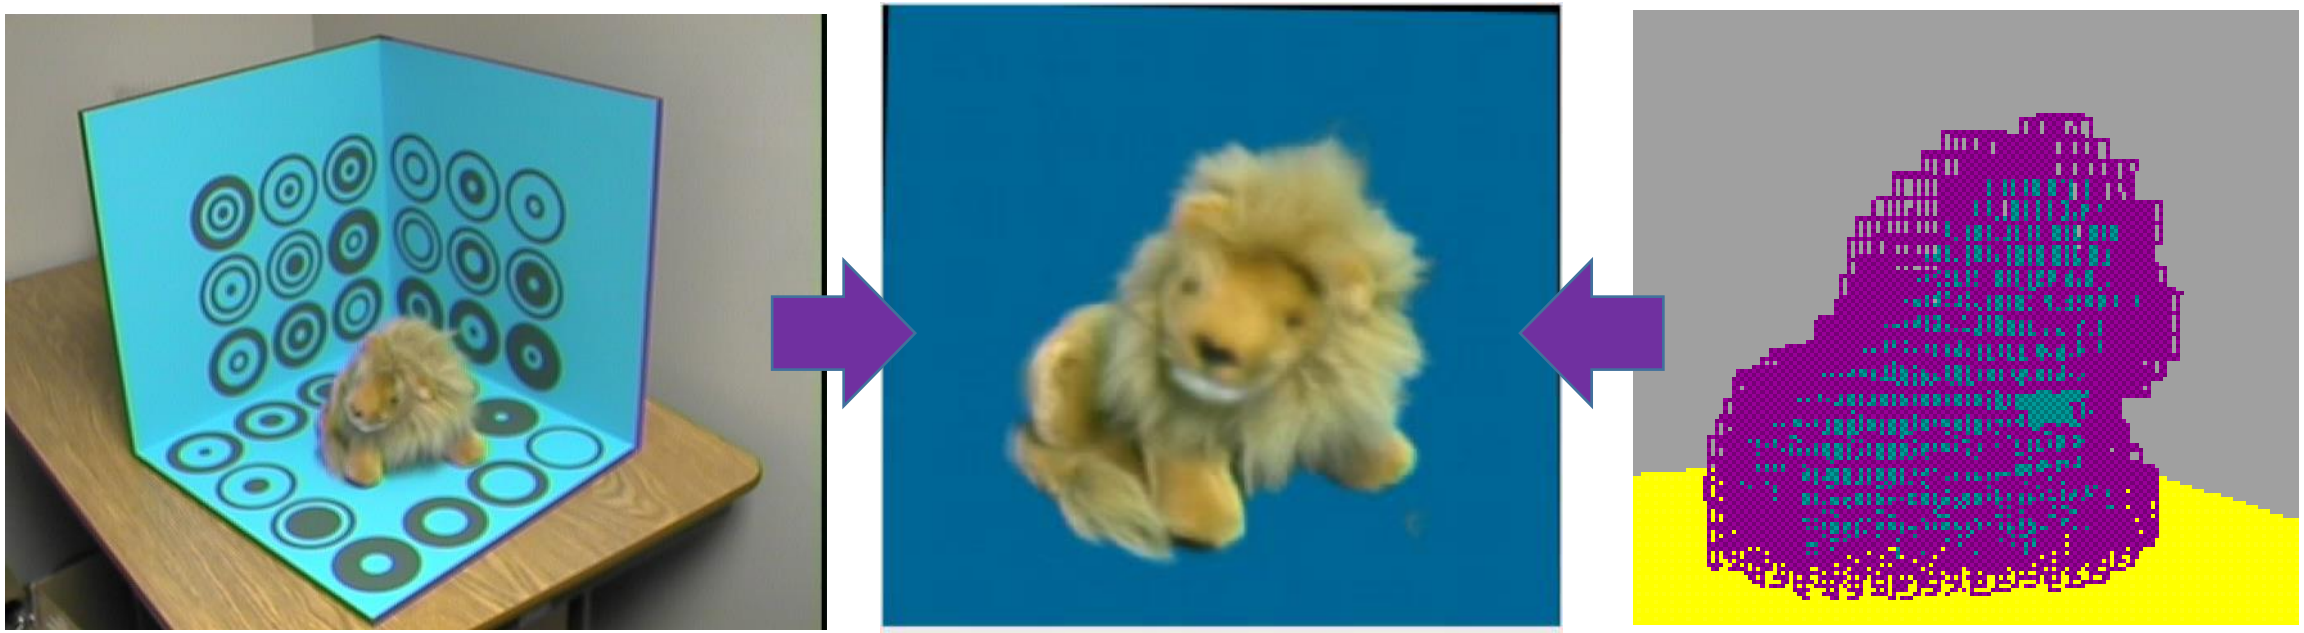

- Render from images and model

Lumigraph – Image Effects

Can model effects such as:

- parallax
- occlusion
- translucency
- refraction
- highlights
- reflections

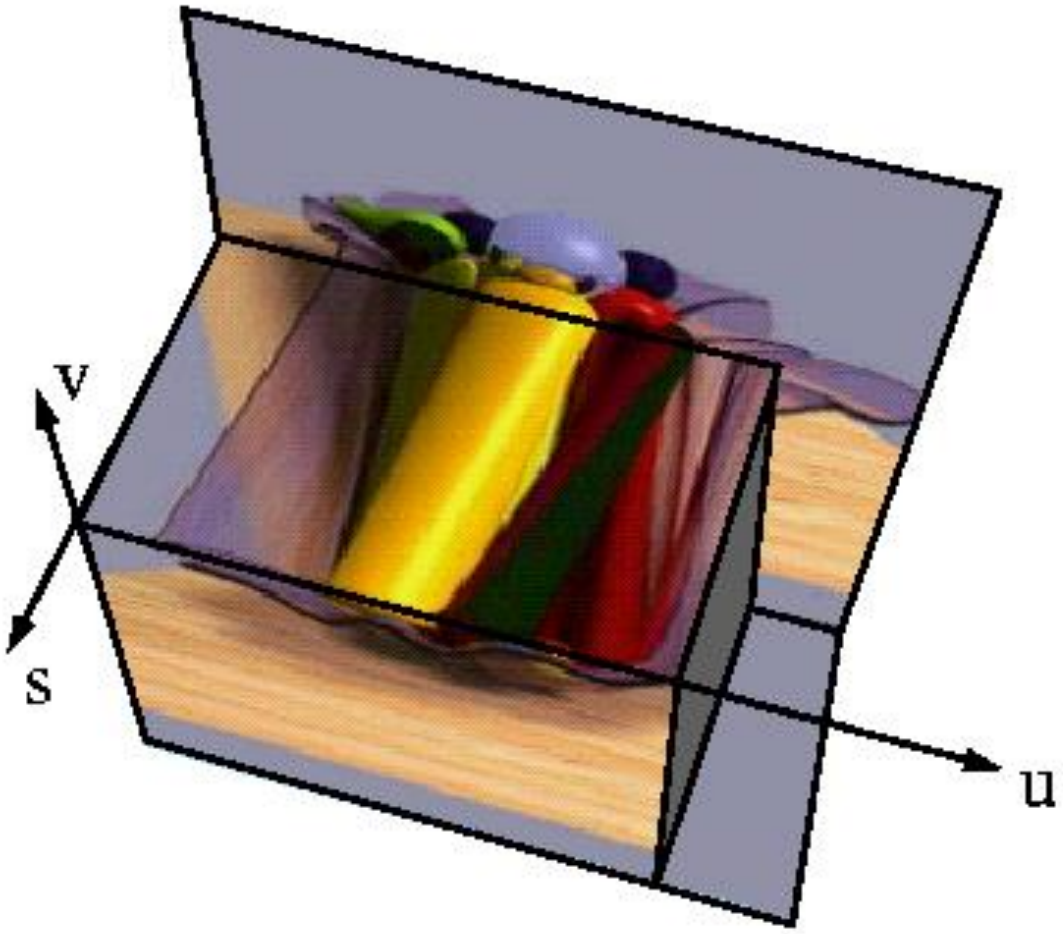

Unstructured Lumigraph

- What if the images aren't sampled on a regular 2D grid?
- Can still re-sample rays
- Ray weighting becomes more complex [Heigl *et al.*,DAGM'99]
- Unstructured Lumigraph [Buehler *et al.*, SIGGRAPH'2000]
- Deep blending [Hedman *et al.*, SG Asia 2018]
- FVS [Riegler & Koltun, ECCV'2020]

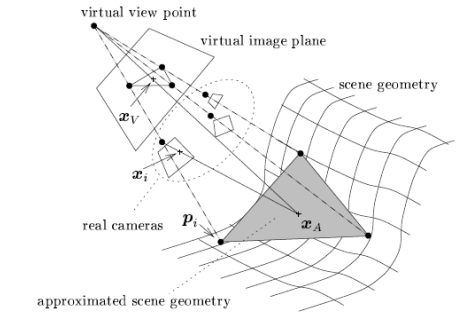

Figure3. Drawing triangles of neighboring projected camera centers and approximating scene geometry by one plane for the whole scene, for one camera triple or by several planes for one camera triple.

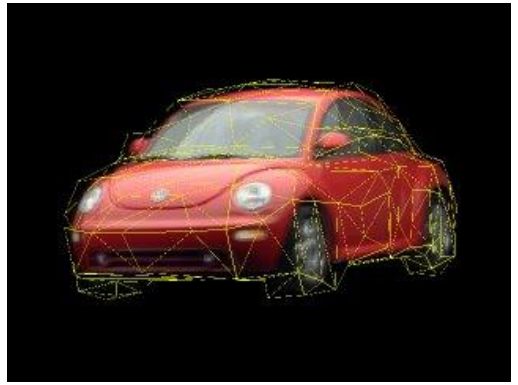

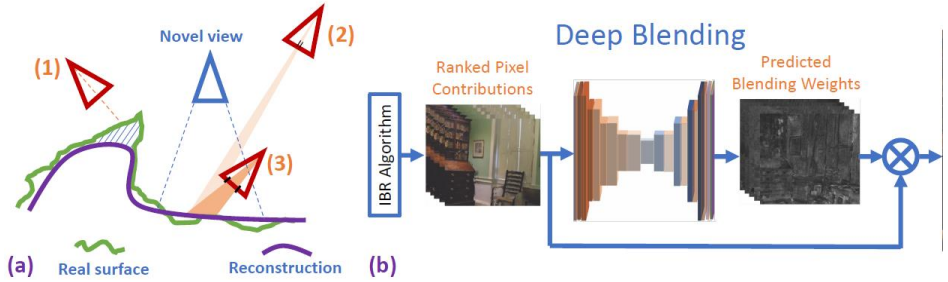

Surface Light Fields

- [Wood et al, SIGGRAPH 2000]
- Turn 4D parameterization around:
  - image @ every surface pt.
- Leverage coherence:
  - compress radiance fn (BRDF * illumination) after rotation by $\boldsymbol{n}$

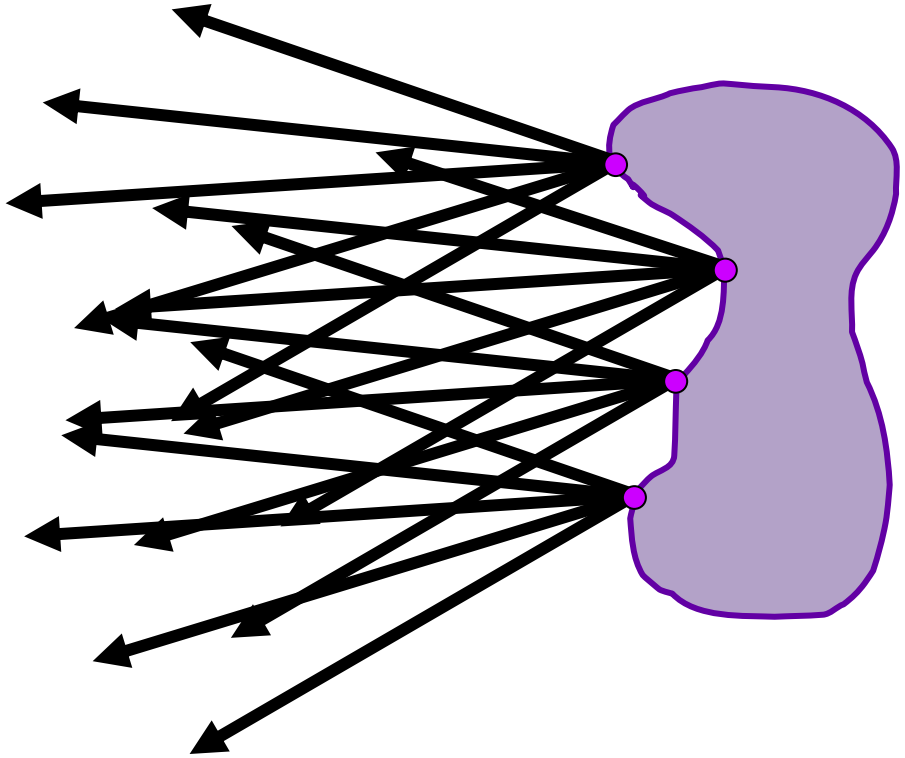

Surface Light Fields

- [Wood et al, SIGGRAPH 2000]

- …
- Implicit Differentiable Renderer [Yariv *et al.*, NeurIPS 2020]

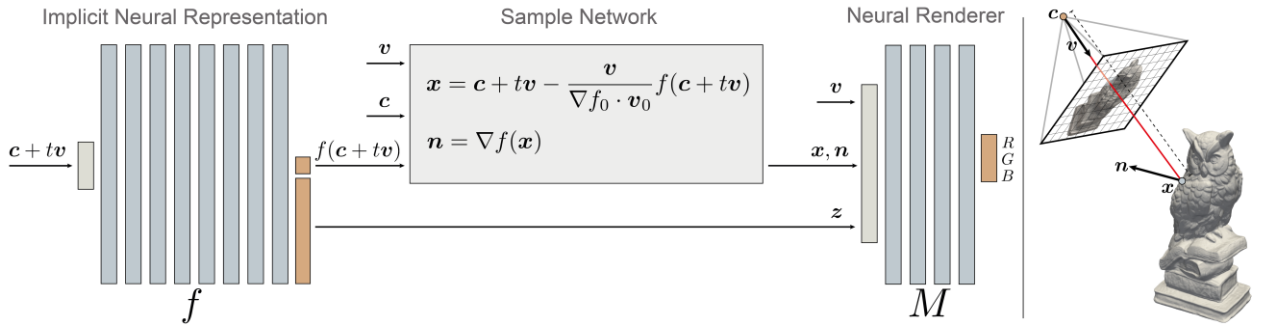

Environment Matting [2000]

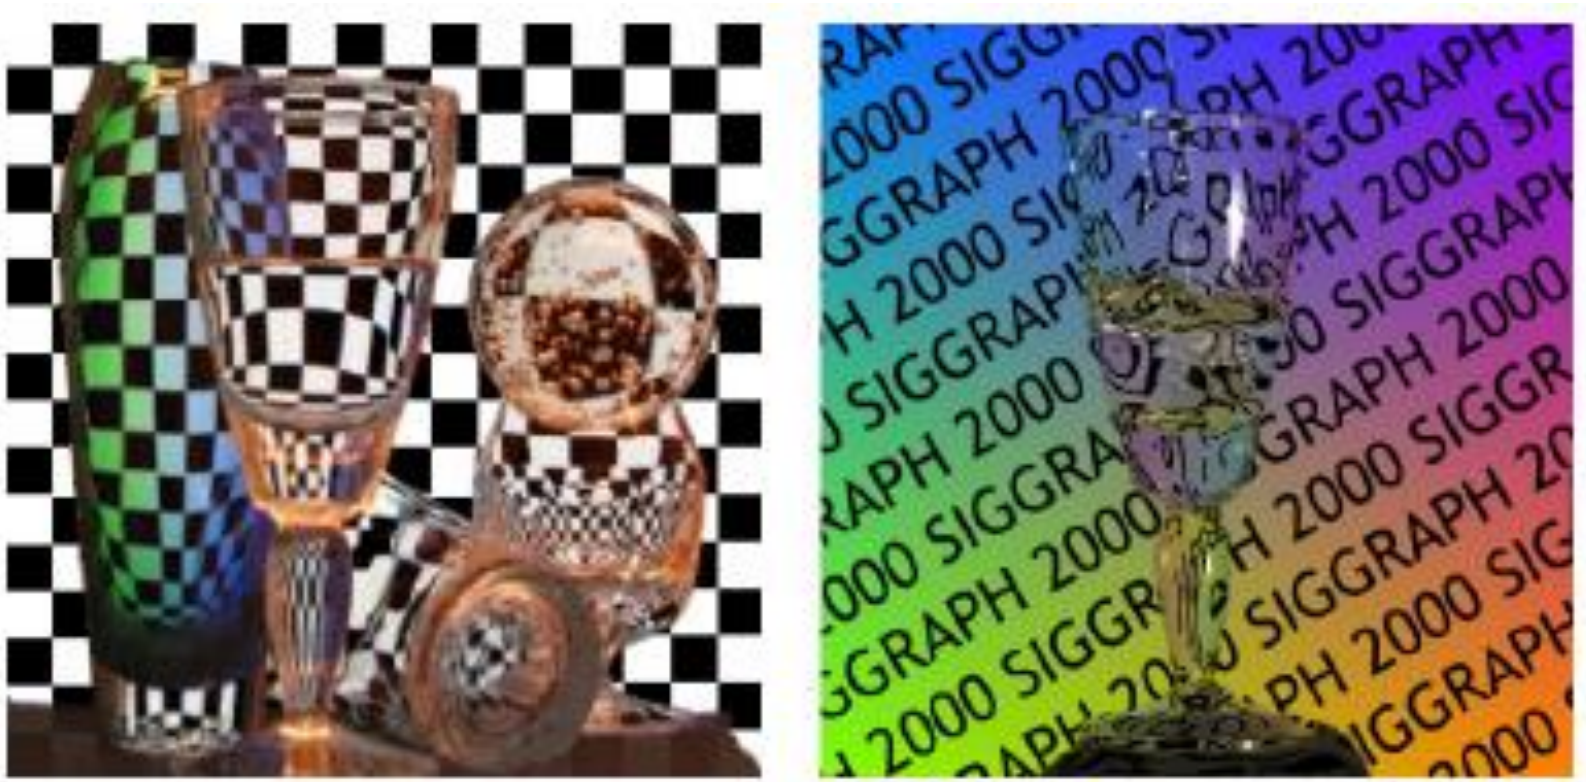

Figure 1 Sample composite images constructed with the techniques of this paper: slow but accurate on the left, and a more restricted example acquired at video rates on the right.

Layered Depth Image

2.5 D ?

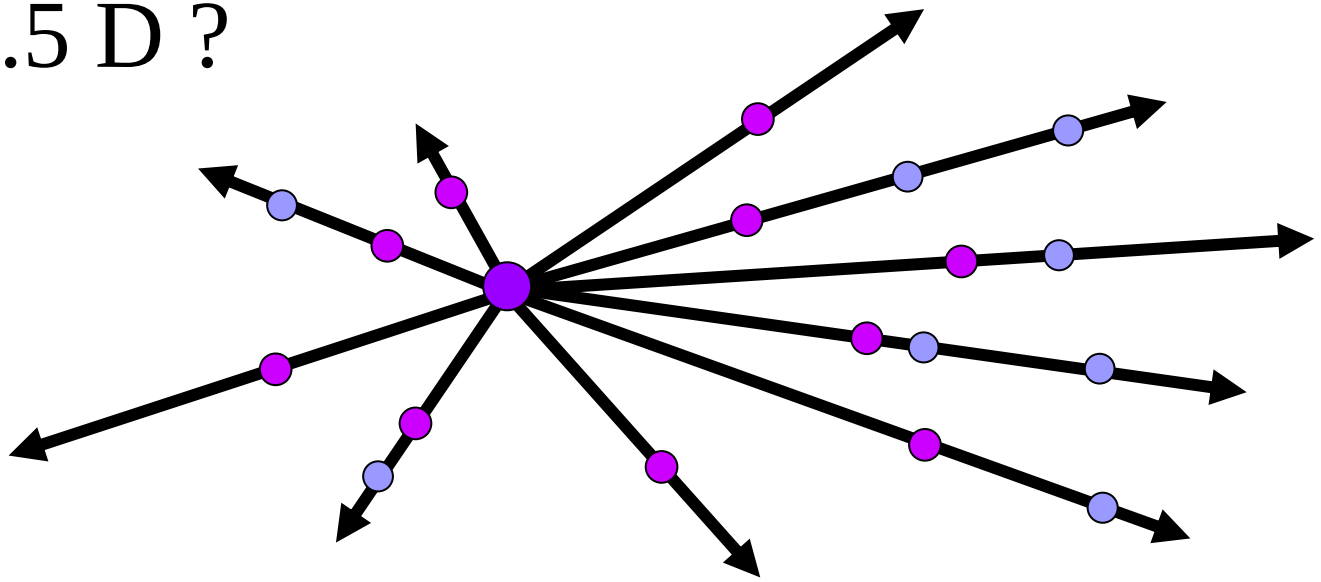

Layered Depth Image

Layered Depth Image

- Rendering from LDI
  [Shade et al., SIGGRAPH'98]

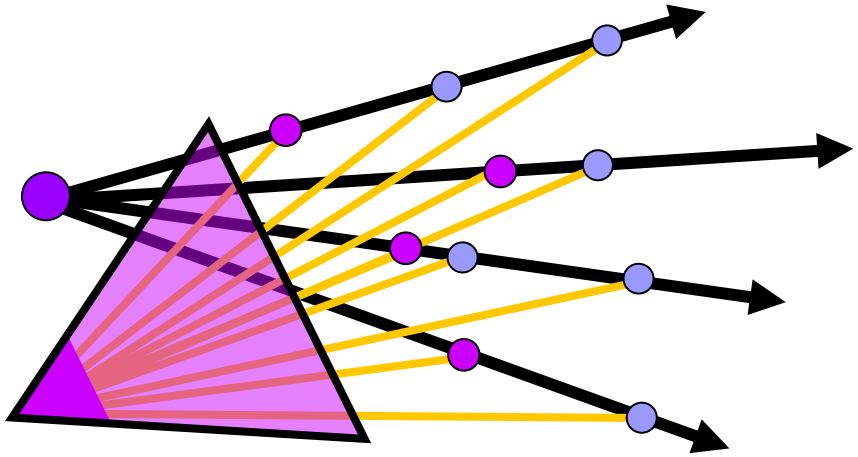

- Incremental in LDI X and Y
- Guaranteed to be in back-to-front order

Sprites with Depth

- Represent scene as collection of cutouts with depth (planes + parallax)
- Render back to front with fwd/inverse warping [Shade *et al.*, SIGGRAPH'98]
- Basis of Virtual Viewpoint Video [Zitnick *et al.* 2004]

Multiplane images

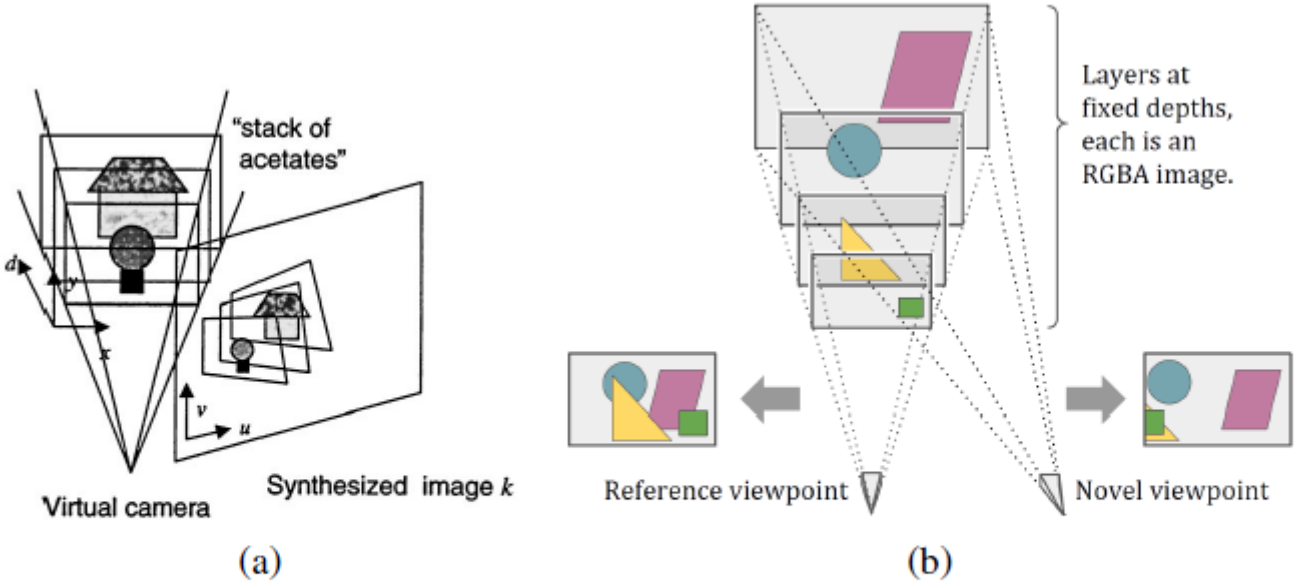

Figure 14.7 *Finely sliced fronto-parallel layers: (a) stack of acetates (Szeliski and Golland 1999) © 1999 Springer and (b) multiplane images (Zhou, Tucker, Flynn* et al. *2018) © 2018 ACM.*

Multiplane images

Input images

Inferred MPI Representation

A novel view synthesized from MPI

Multi-sphere and layered meshes

Immersive Light Field Video with a Layered Mesh Representation

MICHAEL BROXTON*, JOHN FLYNN*, RYAN OVERBECK*, DANIEL ERICKSON*, PETER HEDMAN, MATTHEW DUVALL, JASON DOURGARIAN, JAY BUSCH, MATT WHALEN, and PAUL DEBEVEC, Google

(a) Capture Rig (b) Multi-Sphere Image (c) Layered Mesh Representation

[SIGGRAPH'2020]

Virtual Viewpoint Video

Virtual Viewpoint Video [SIGGRAPH 2004]

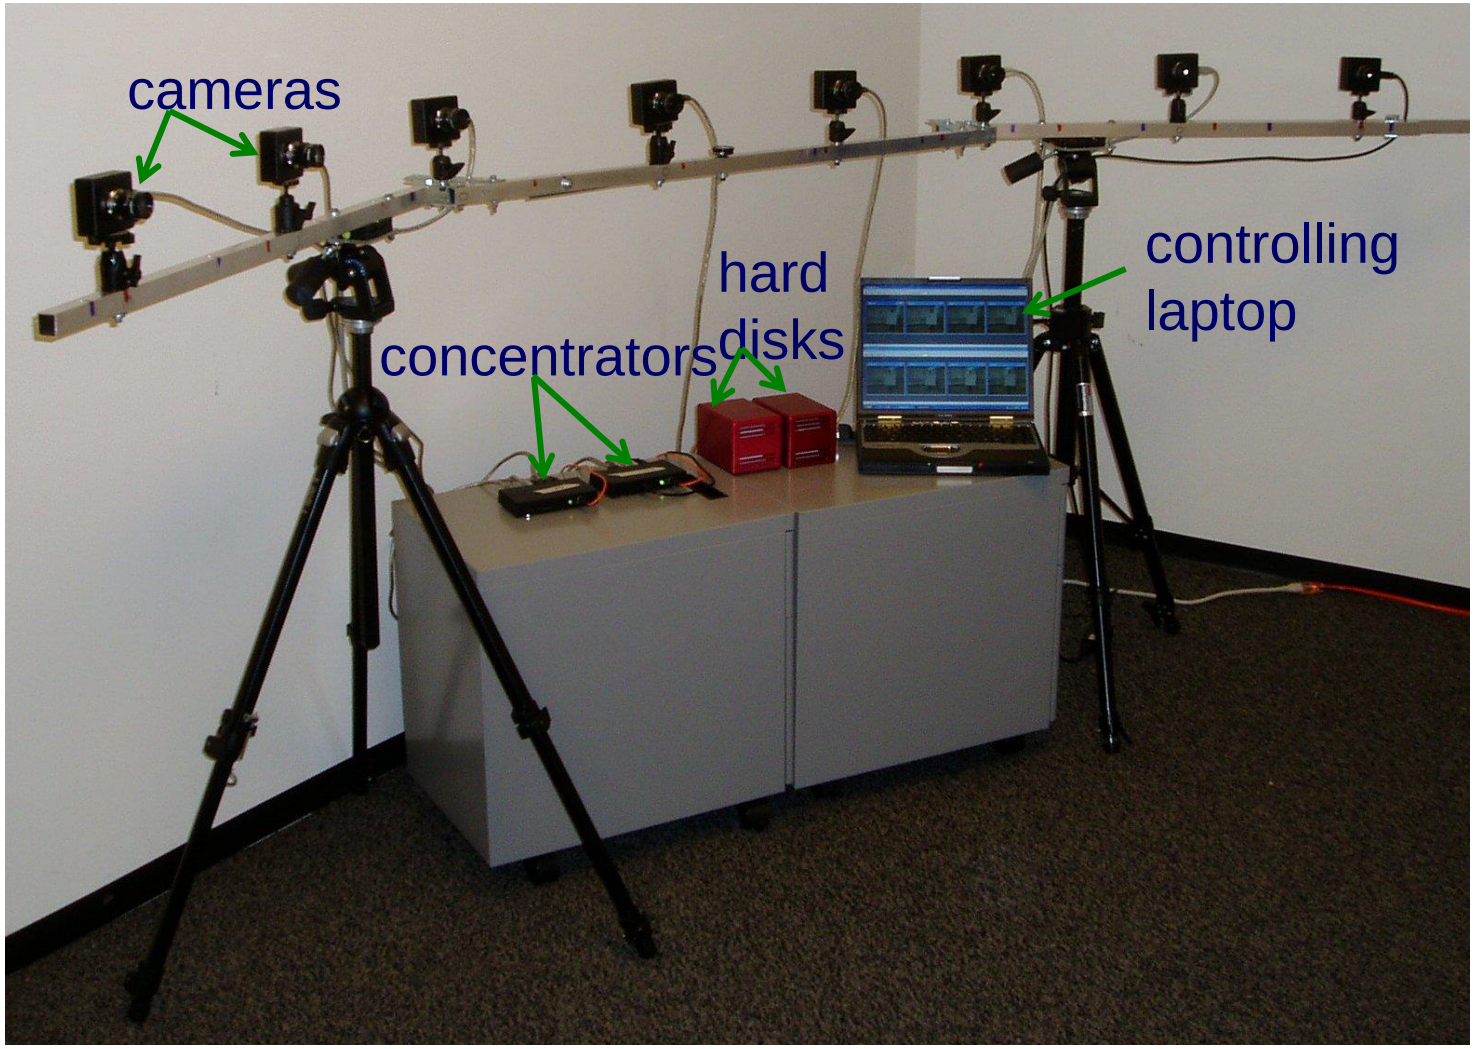

Matting

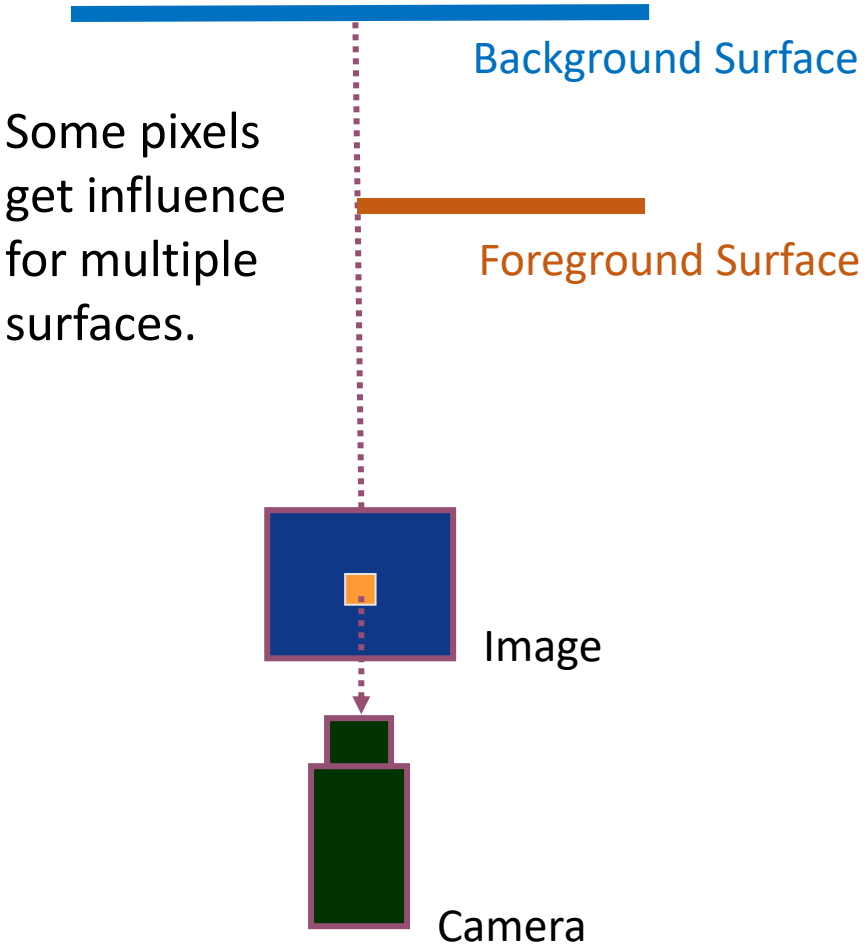

Close up of real image:

Multiple colors and depths at boundary pixels…

Find matting information:

1. Find boundary strips using depth.





2. Within boundary strips compute the colors and depths of the foreground and background object.

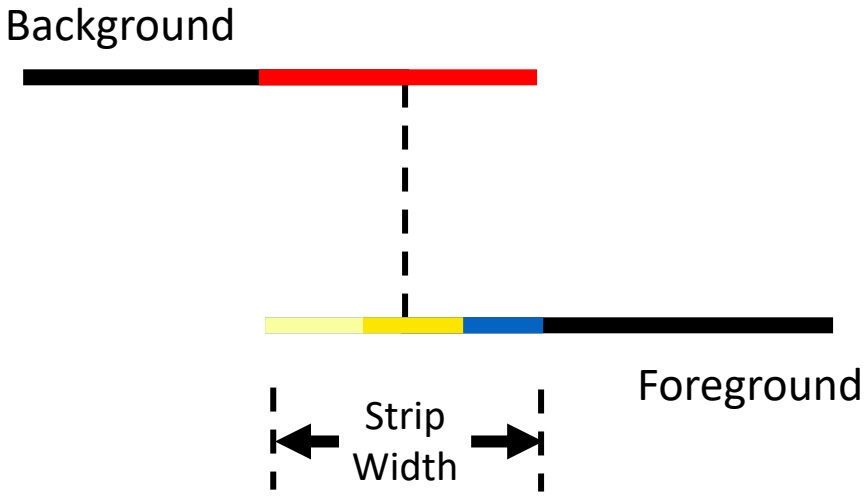

Why matting is important

No Matting

Matting

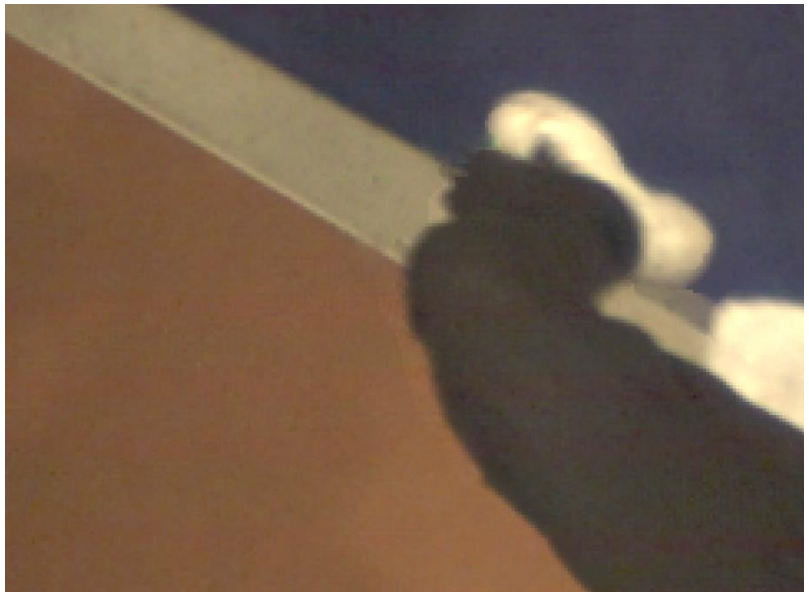

Virtual Viewpoint Video

Two-layer model with
thin boundary strips
[Zitnick *et al.*, SIGGRAPH'04]

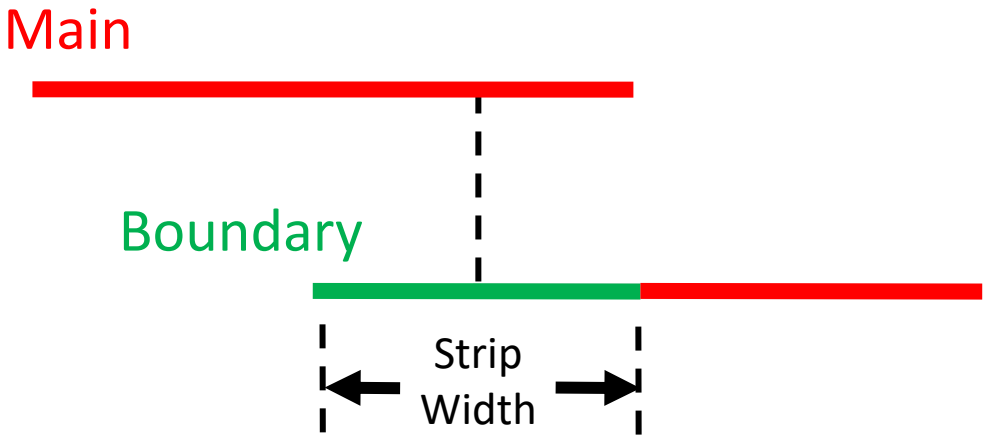

Main Layer: Boundary Layer:

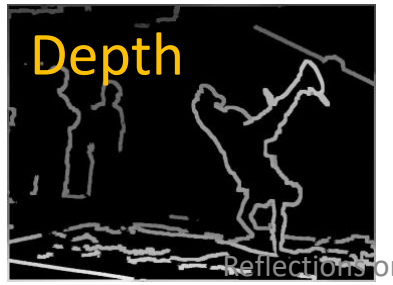

Massive Arabesque

360° Video

360 Video

[Uyttendaele et al. 2004]

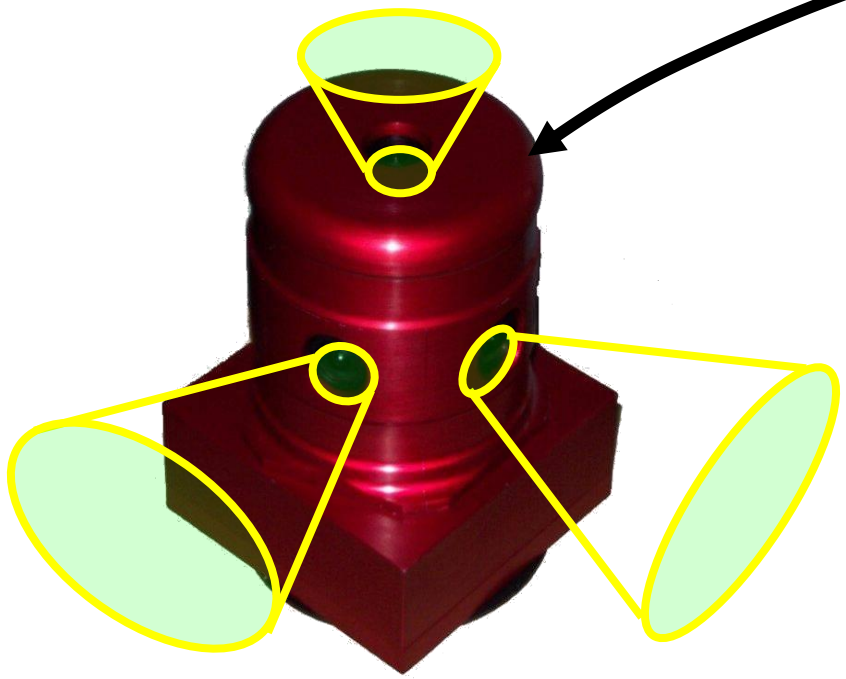

Ladybug (six-camera head)

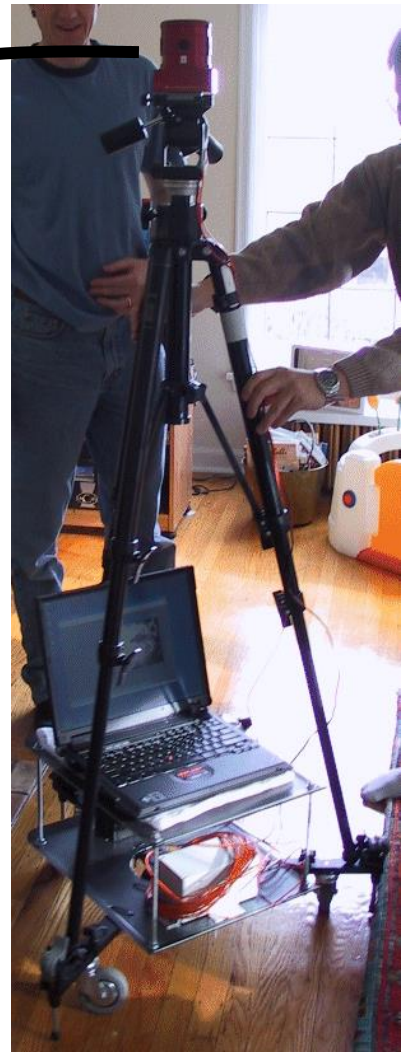

Acquisition platforms (today)

360 Video

360 Video

RICOH

kolor | GoPro
360°

culus
Oculus
Development Kit

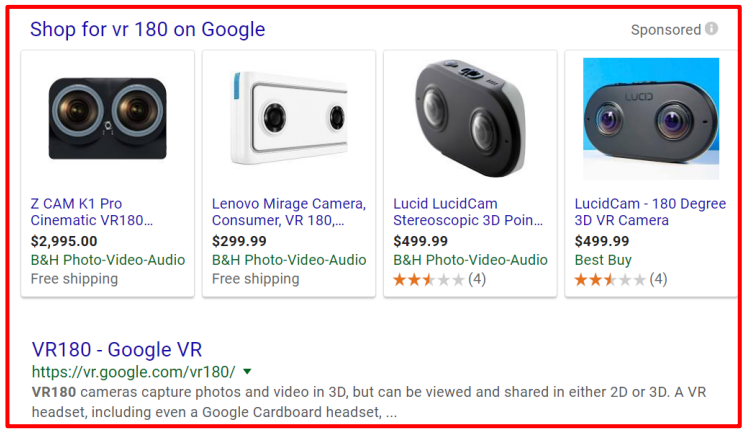
Shop for vr 180 on Google
Sponsored
Z CAM K1 Pro Cinematic VR180...
$2,995.00
B&H Photo-Video-Audio
Free shipping
Lenovo Mirage Camera, Consumer, VR 180,...
$299.99
B&H Photo-Video-Audio
Free shipping
Lucid LucidCam Stereoscopic 3D Poin...
$499.99
B&H Photo-Video-Audio
(4)
LucidCam - 180 Degree 3D VR Camera
$499.99
Best Buy
(4)
VR180 - Google VR
https://vr.google.com/vr180/
VR180 cameras capture photos and video in 3D, but can be viewed and shared in either 2D or 3D. A VR headset, including even a Google Cardboard headset, ...

$200

$1,000

Google Jump [2015]

ODYSSEY
+
JUMP

Facebook Surround 360 [2016]

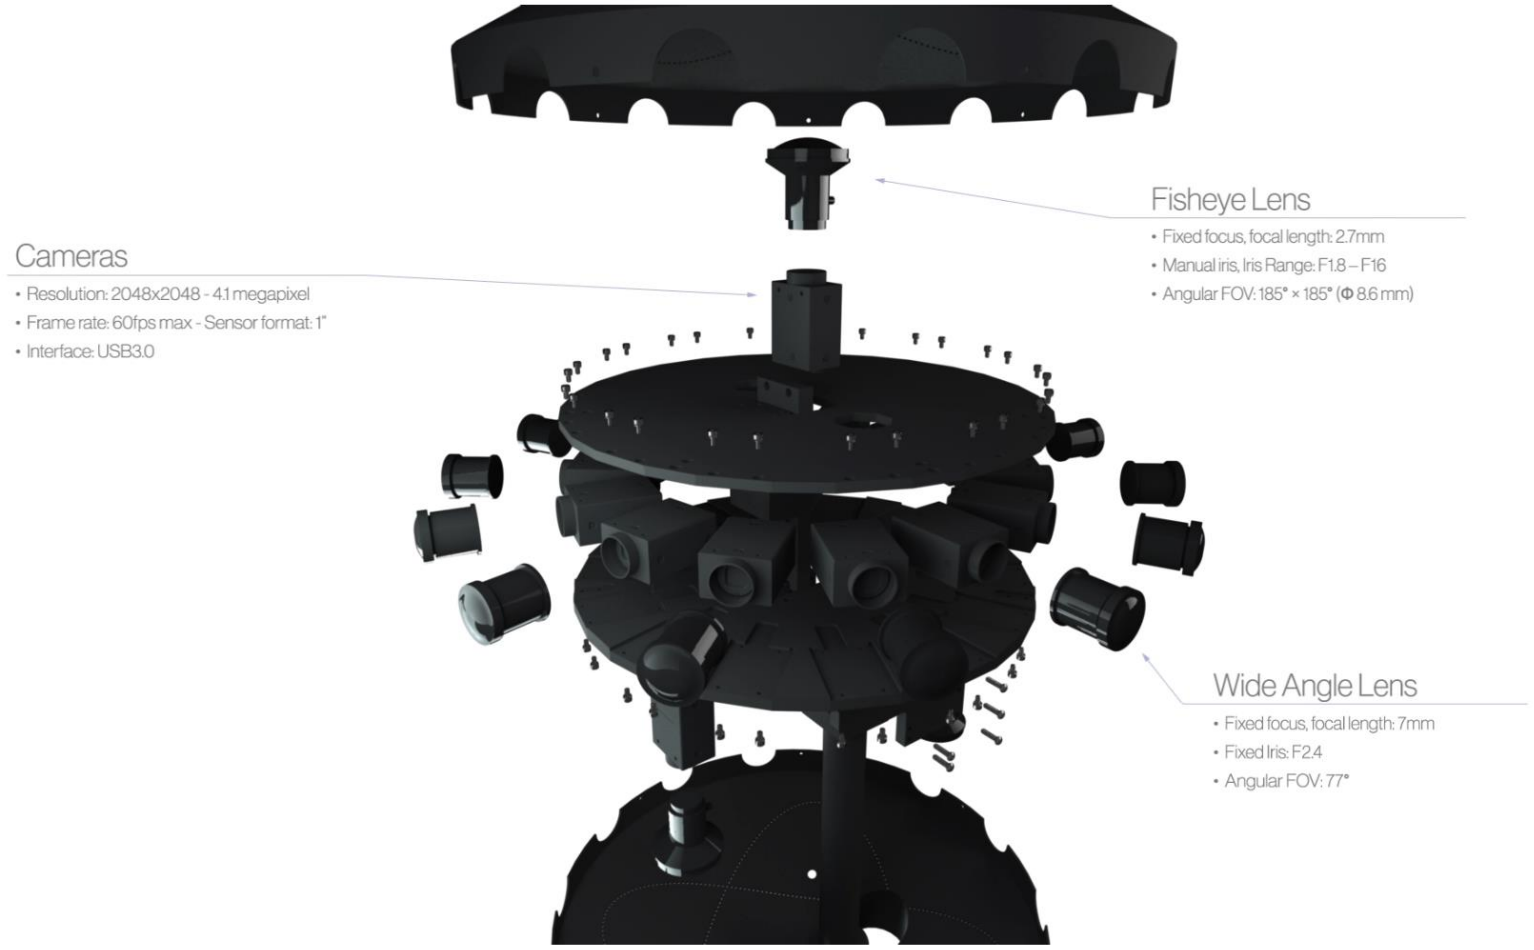

Facebook Surround 360 [2017]

Facebook's new Surround 360 video cameras let you move around inside live-action scenes

The freedom of VR with the fidelity of real life

By Nick Statt | @nickstatt | Apr 19, 2017, 1:15pm EDT

Facebook today announced the second generation of its Surround 360 video camera design, and this time the company is serious about helping potential customers purchase it as an actual product. The Surround 360, which Facebook unveiled last year as an open-source spec guide for others to build off of, has been upgraded as both a larger, more capable unit and a smaller, more portable version.

An Integrated 6DoF Video Camera and System Design

ALBERT PARRA POZO, MICHAEL TOKSVIG, TERRY FILIBA SCHRAGER, and JOYCE HSU, Facebook Inc.
UDAY MATHUR, RED Digital Cinema
ALEXANDER SORKINE-HORNUNG, RICK SZELISKI, and BRIAN CABRAL, Facebook Inc.

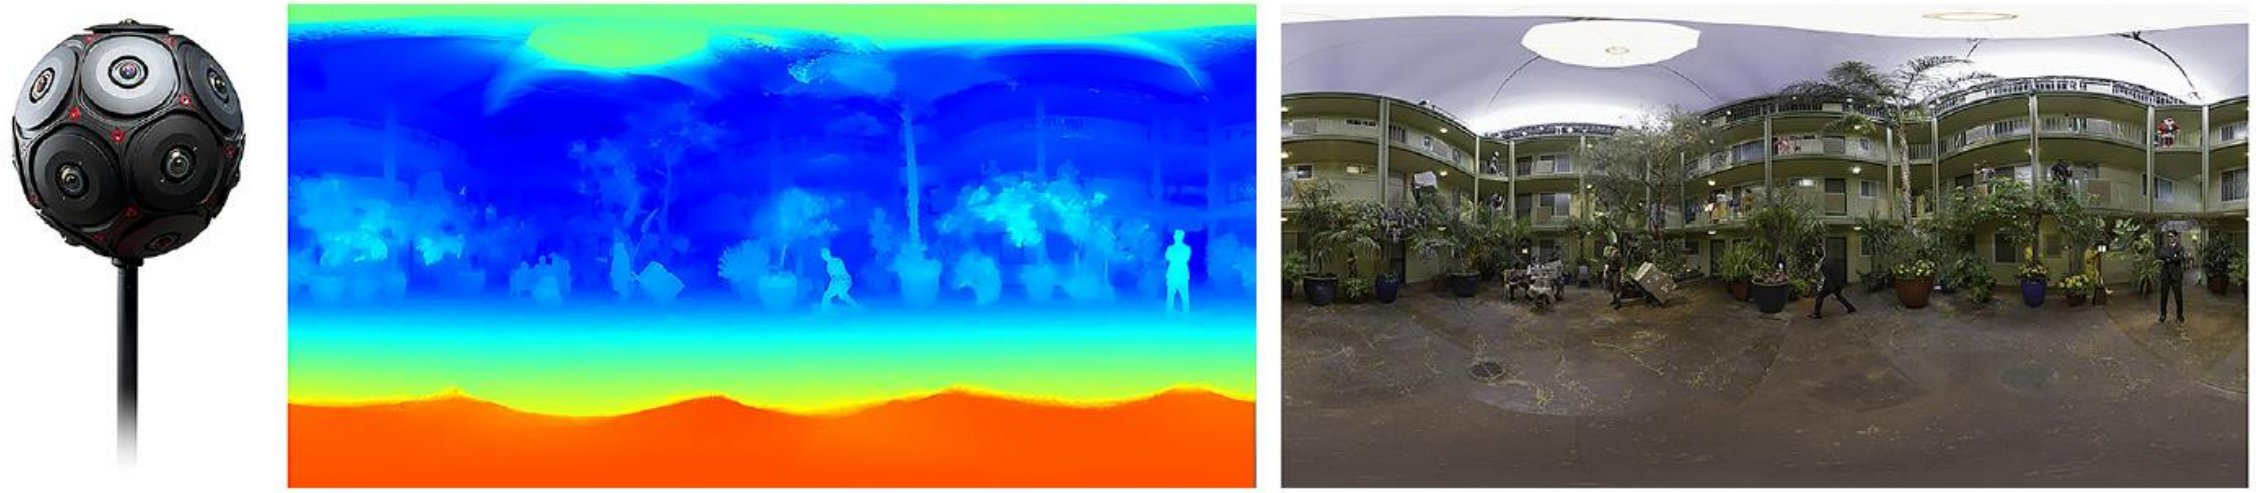

Fig. 1. The commercial 16 camera system, an equirectangular depth map, and final color rendering produced from our system.

Video

[SIGGRAPH Asia 2019]

Hemispherical light field capture & playback

(a) Capture Rig

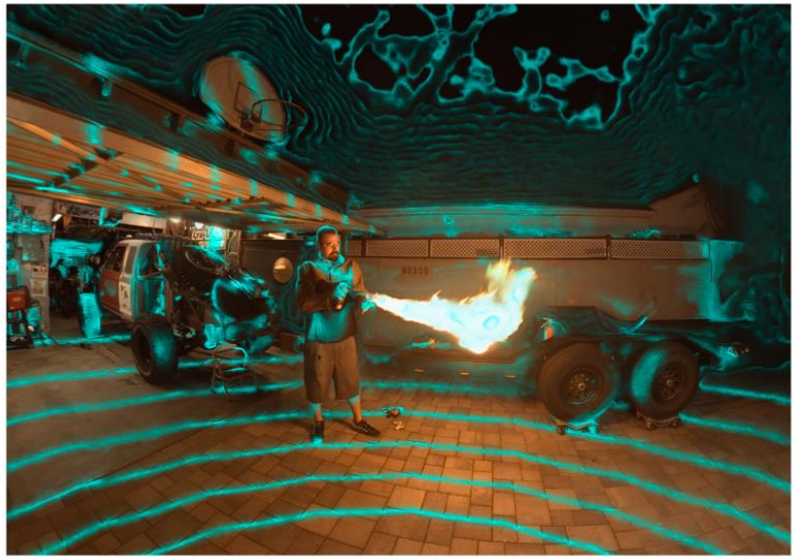

(b) Multi-Sphere Image

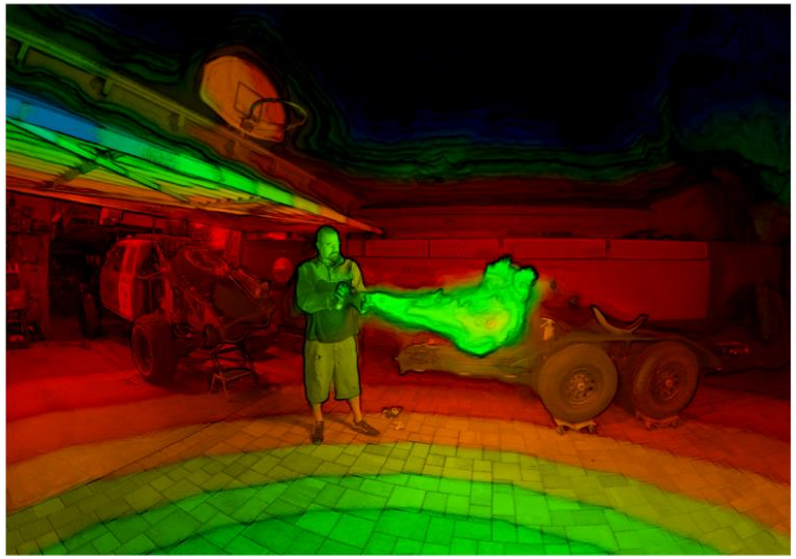

(c) Layered Mesh Representation

IMMERSIVE LIGHT FIELD VIDEO WITH A LAYERED MESH REPRESENTATION

SIGGRAPH 2020 Technical Paper

Download PDF

Michael Broxton*, John Flynn*, Ryan Overbeck*, Daniel Erickson*, Peter Hedman, Matthew DuVall, Jason Dourgarian, Jay Busch, Matt Whalen, Paul Debevec

Stereo from *two* 360 cameras

Low-Cost 360 Stereo Photography and Video Capture, *Matzen, Cohen, Evans, Kopf, Szeliski*, SIGGRAPH 2017.

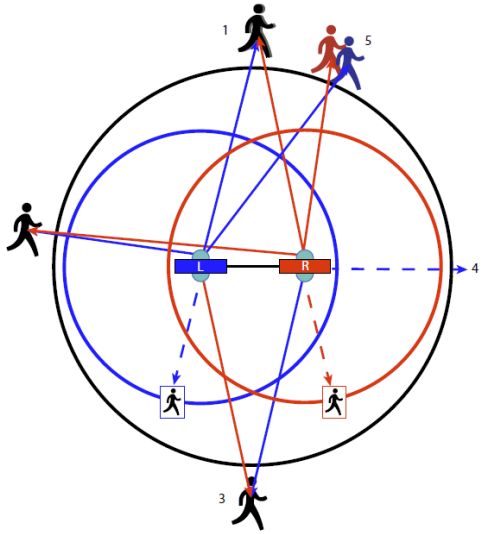

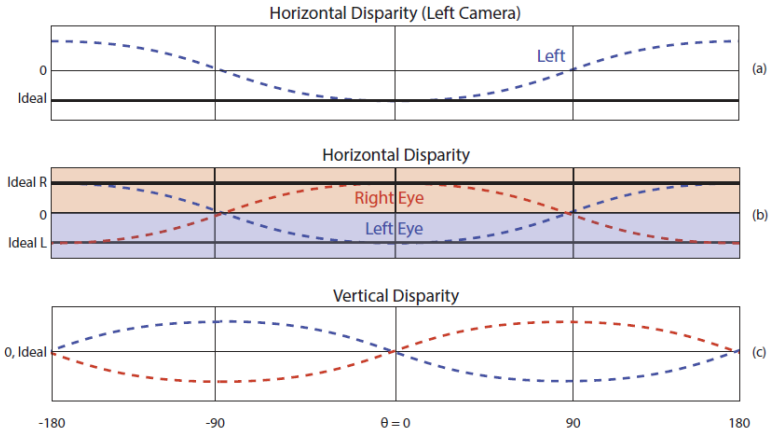

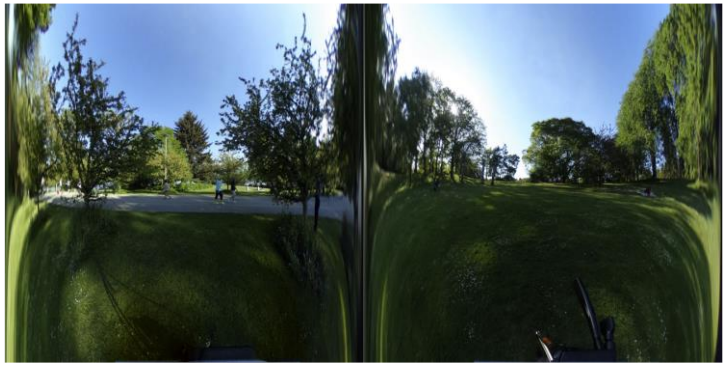

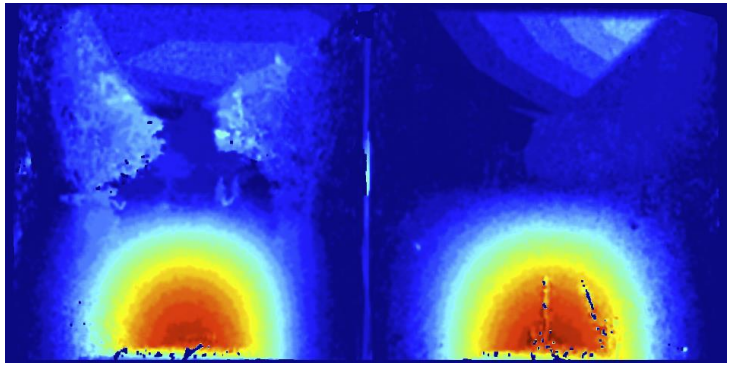

Immersive Video Stabilization

First-person Hyperlapse

Create buttery-smooth “fast forwards” from action videos

(a) Scene reconstruction (b) Proxy geometry (c) Stitched & blended

[Kopf, Cohen, Szeliski, SIGGRAPH 2014]

Proxy Geometry
(for a single video frame)

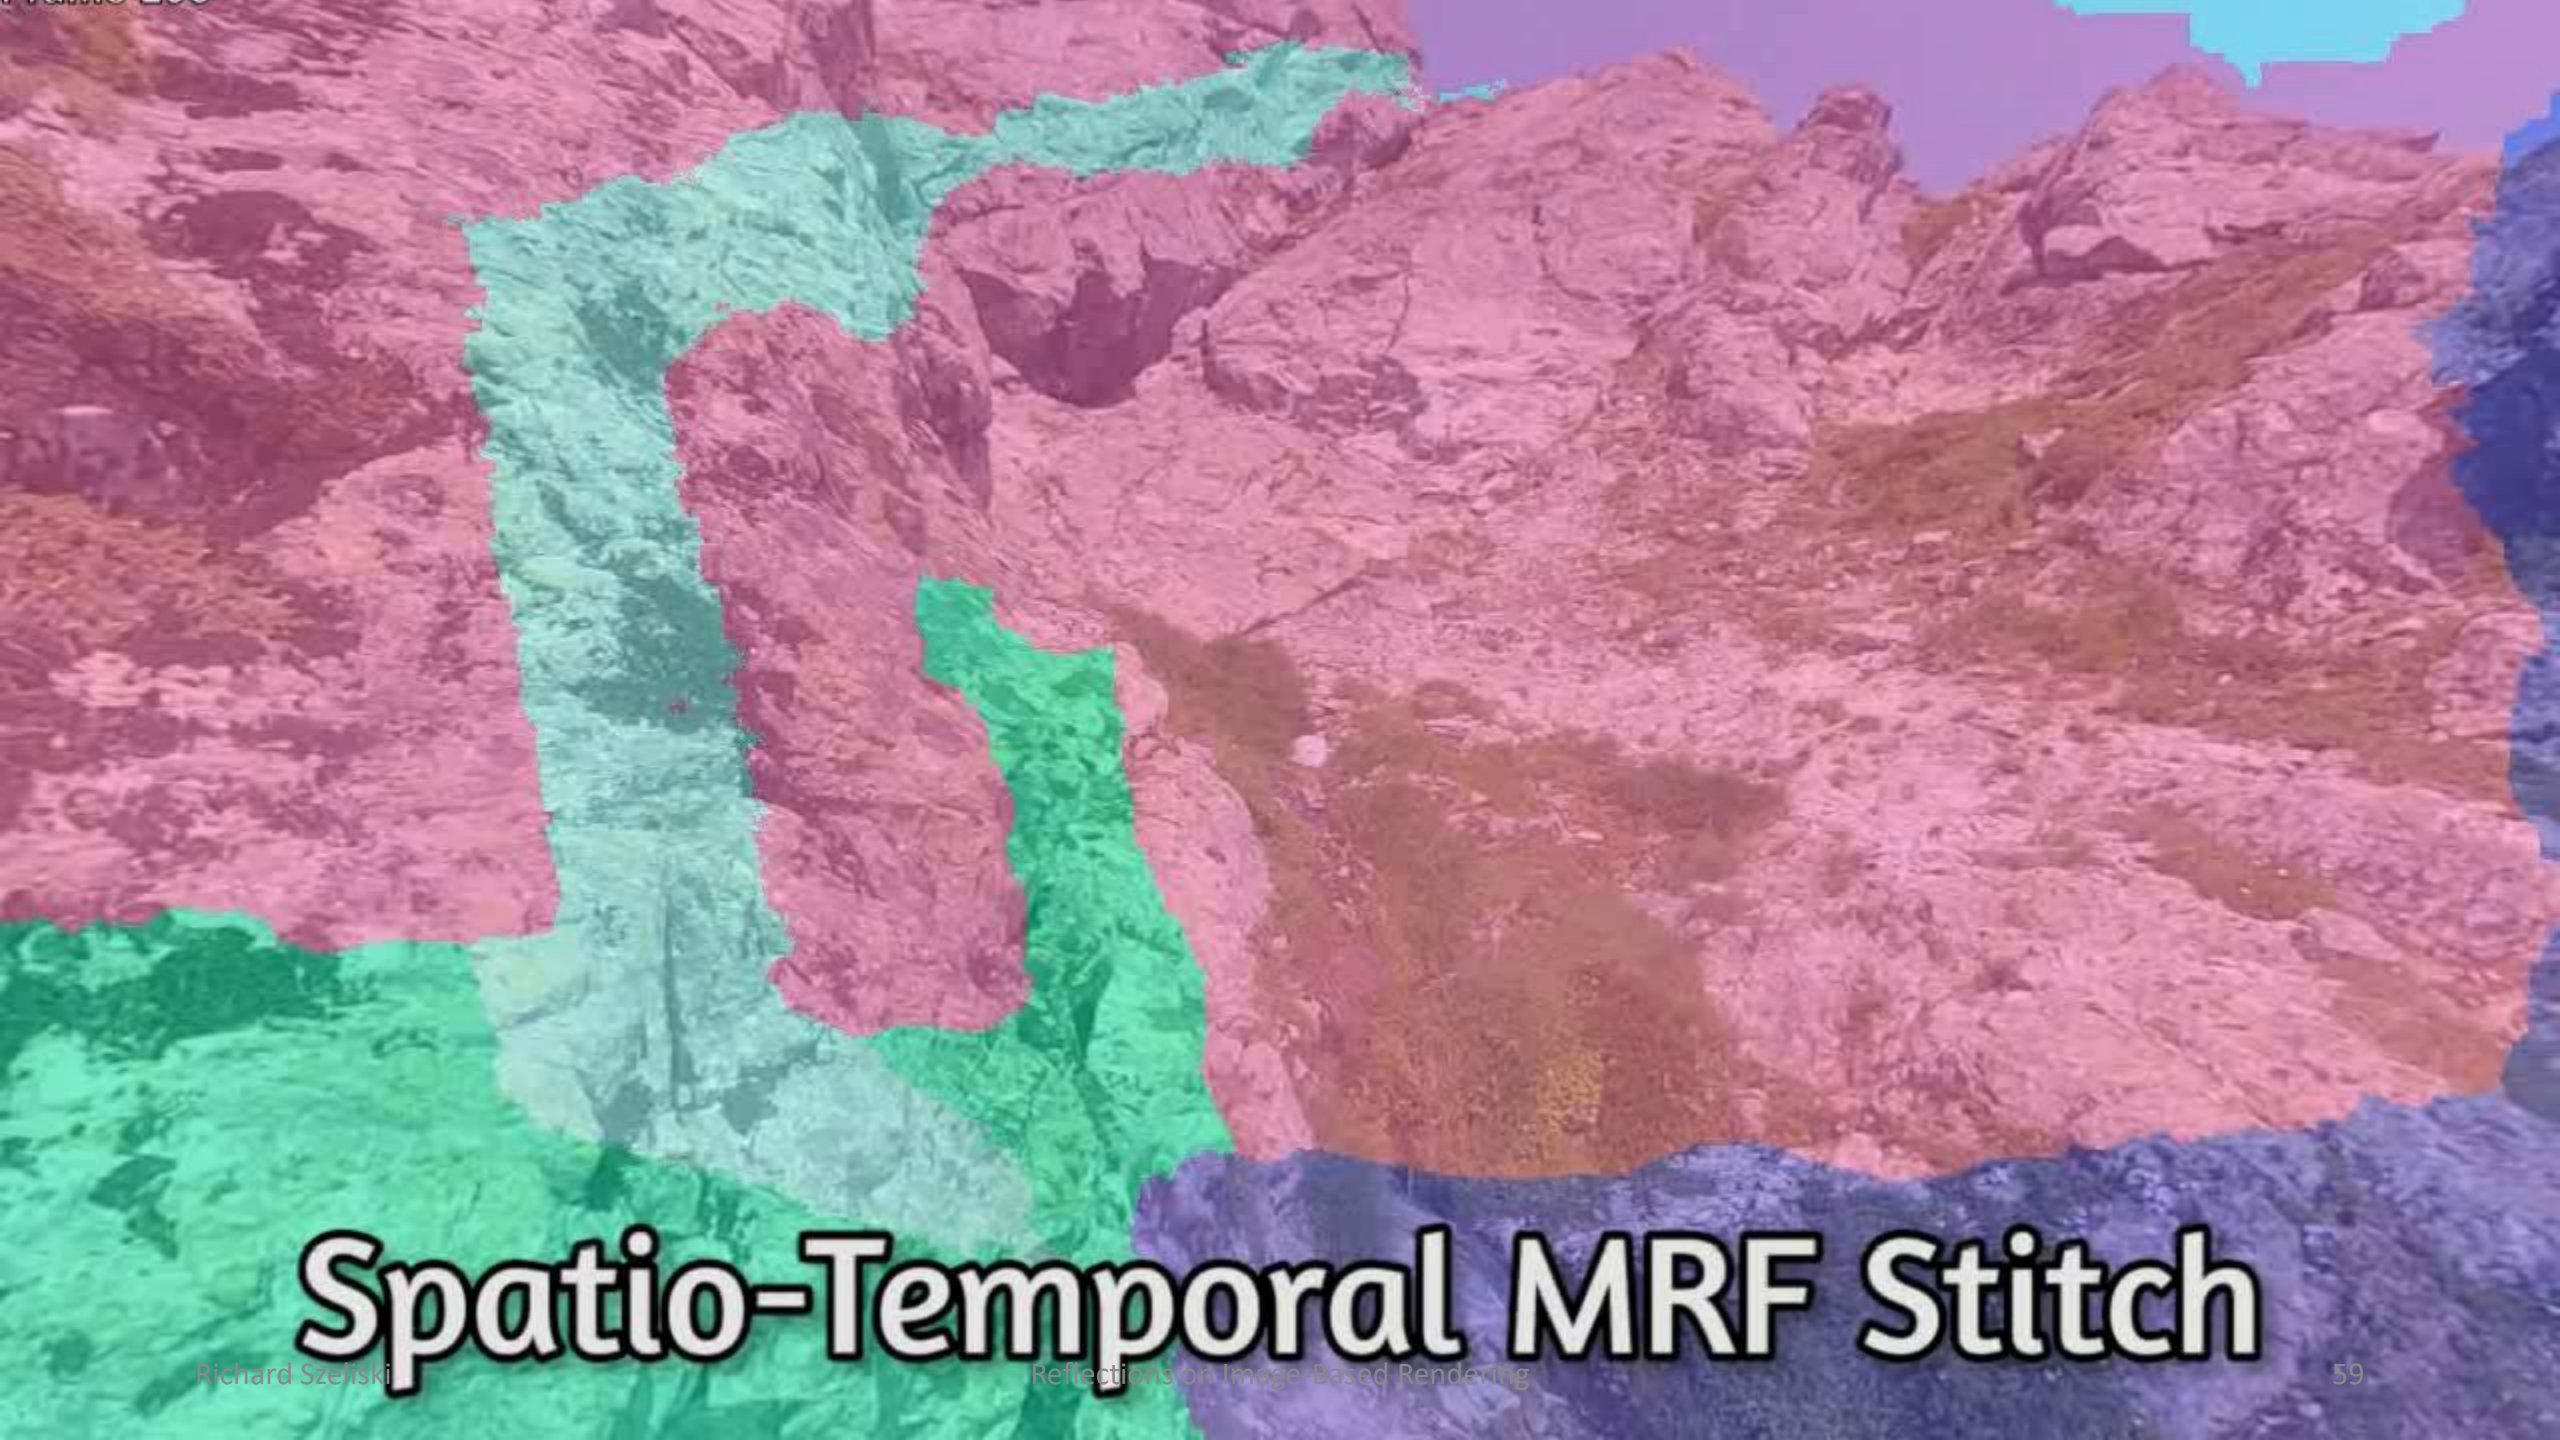
Spatio-Temporal MRF Stitch

Input Video

Large-Scale Reconstruction

Photo Tourism

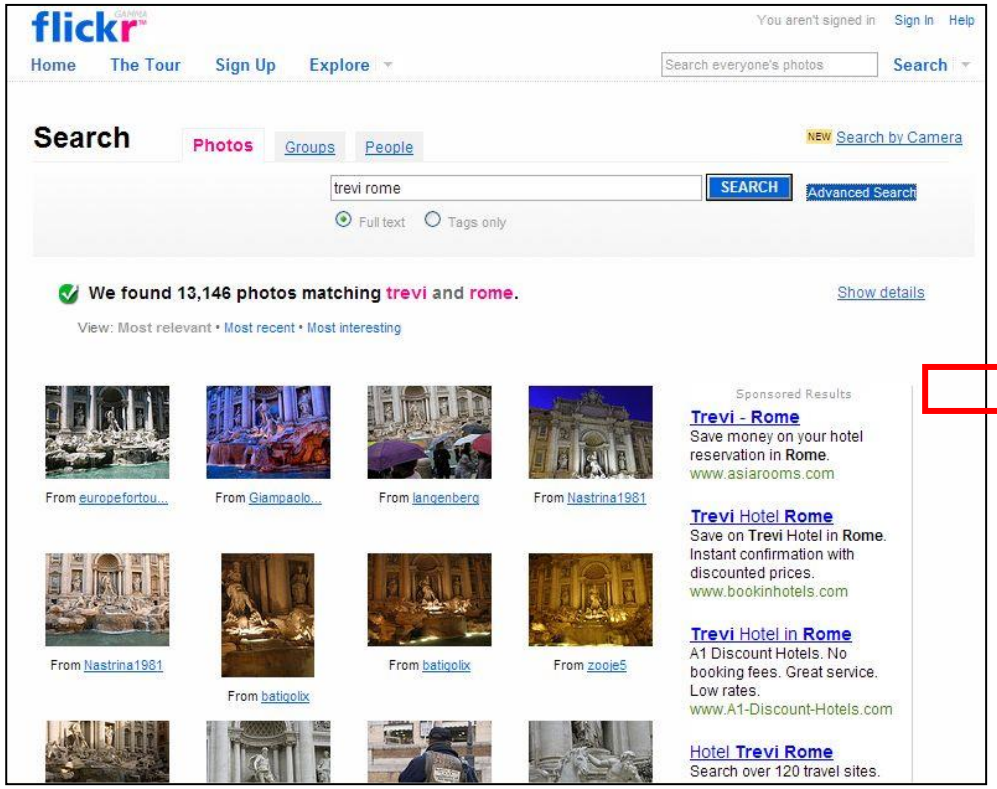

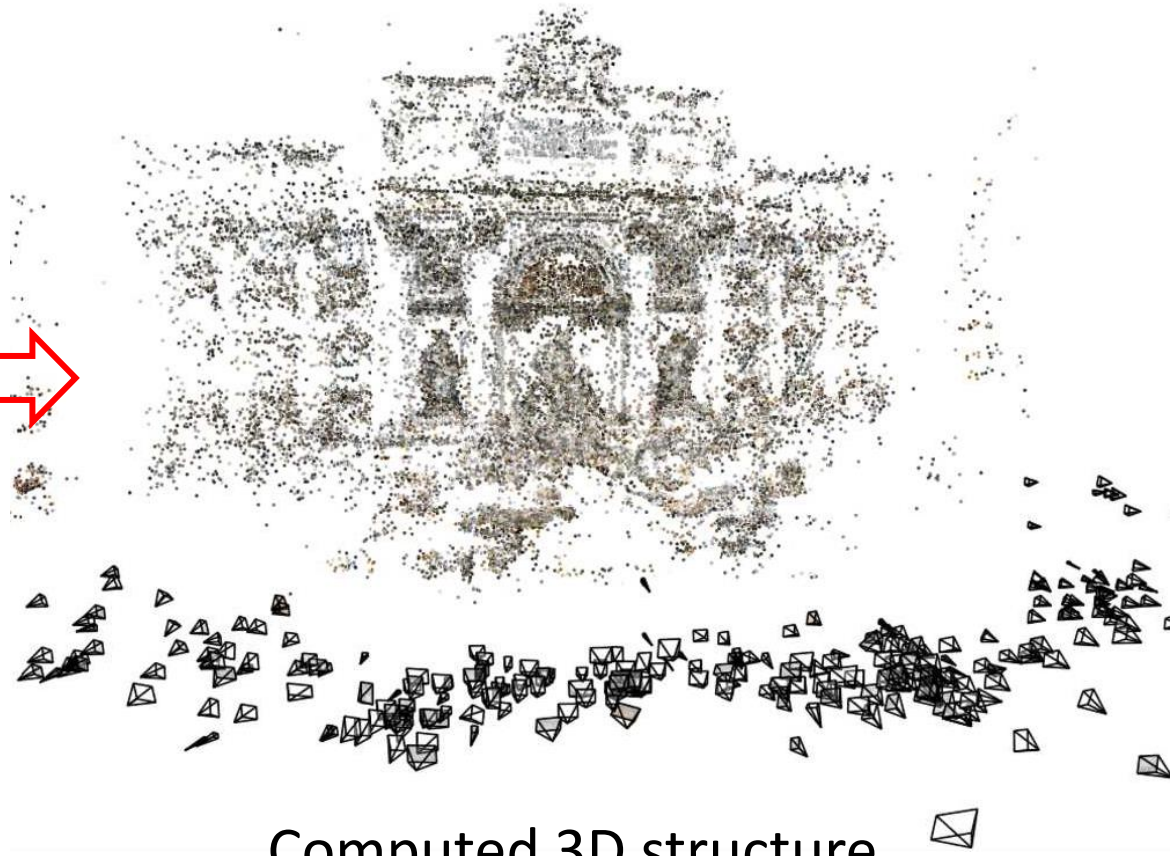

Internet images Computed 3D structure

[Snavely, Seitz, Szeliski, SIGGRAPH 2006]

System overview

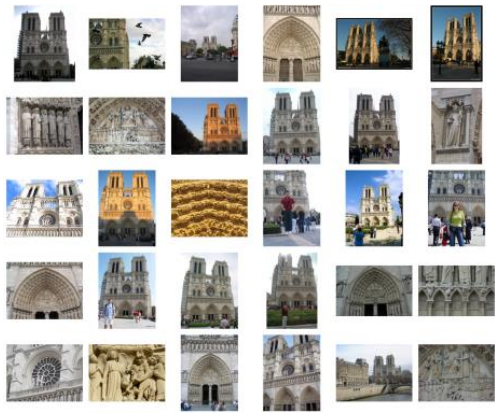

Input photographs

Scene reconstruction

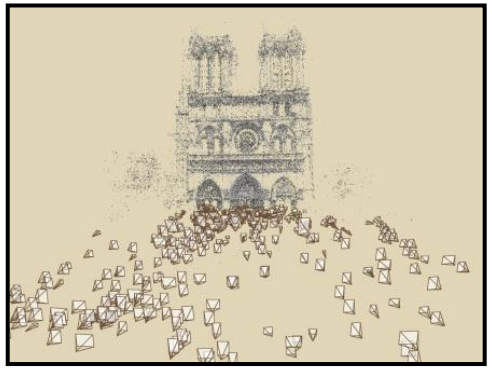

Relative camera positions and orientations

Point cloud

Sparse correspondence

Photo Explorer

Navigation: Prague Old Town Square

Piecewise planar proxies

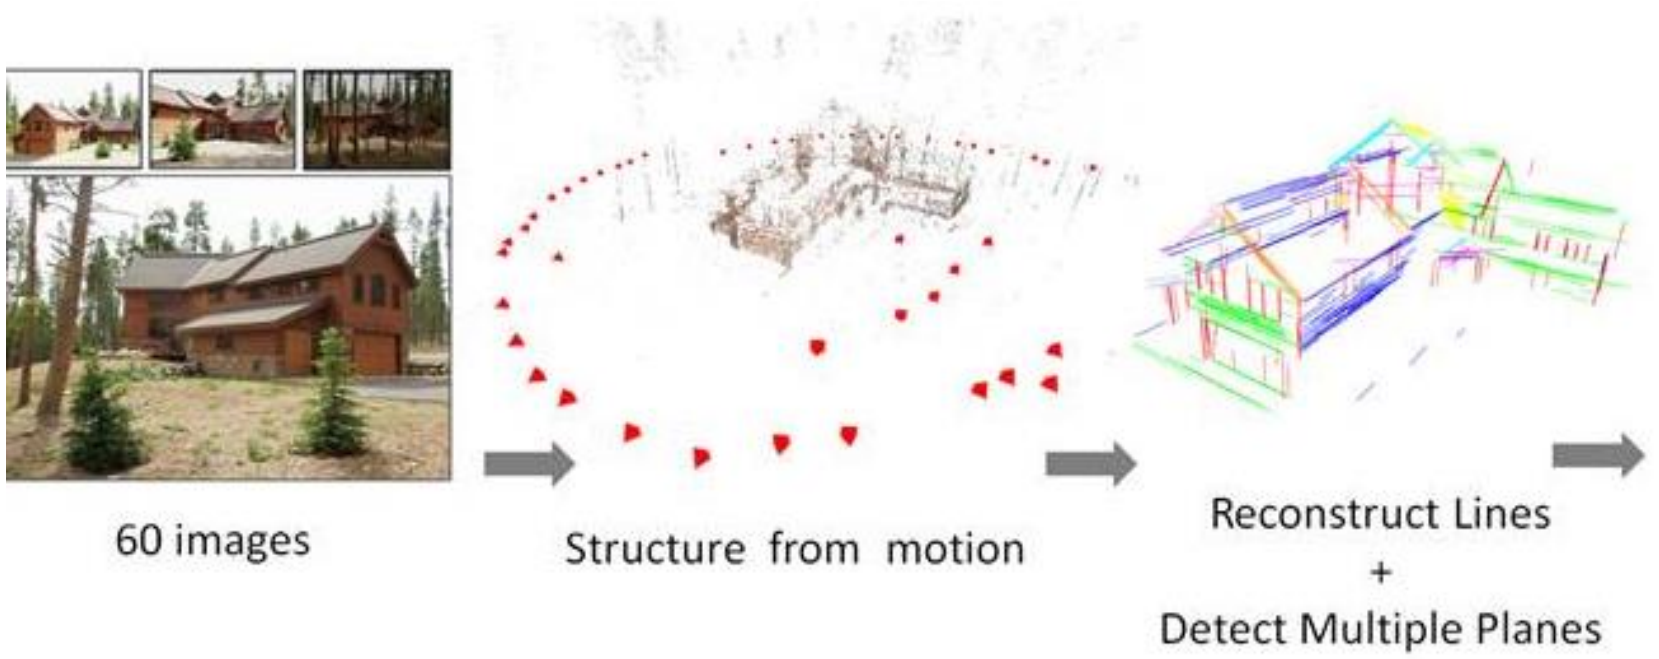

[Sinha, Steedly, Szeliski ICCV'09]

Photo Tours - 2012

[Kushal *et al.*, 3DIMPVT 2012]

The Visual Turing Test - 2013

Figure 5. Visual Turing test. In each image pair, the ground truth image is on the left and our result is on the right.

[Shan *et al.*, 3DV 2013]

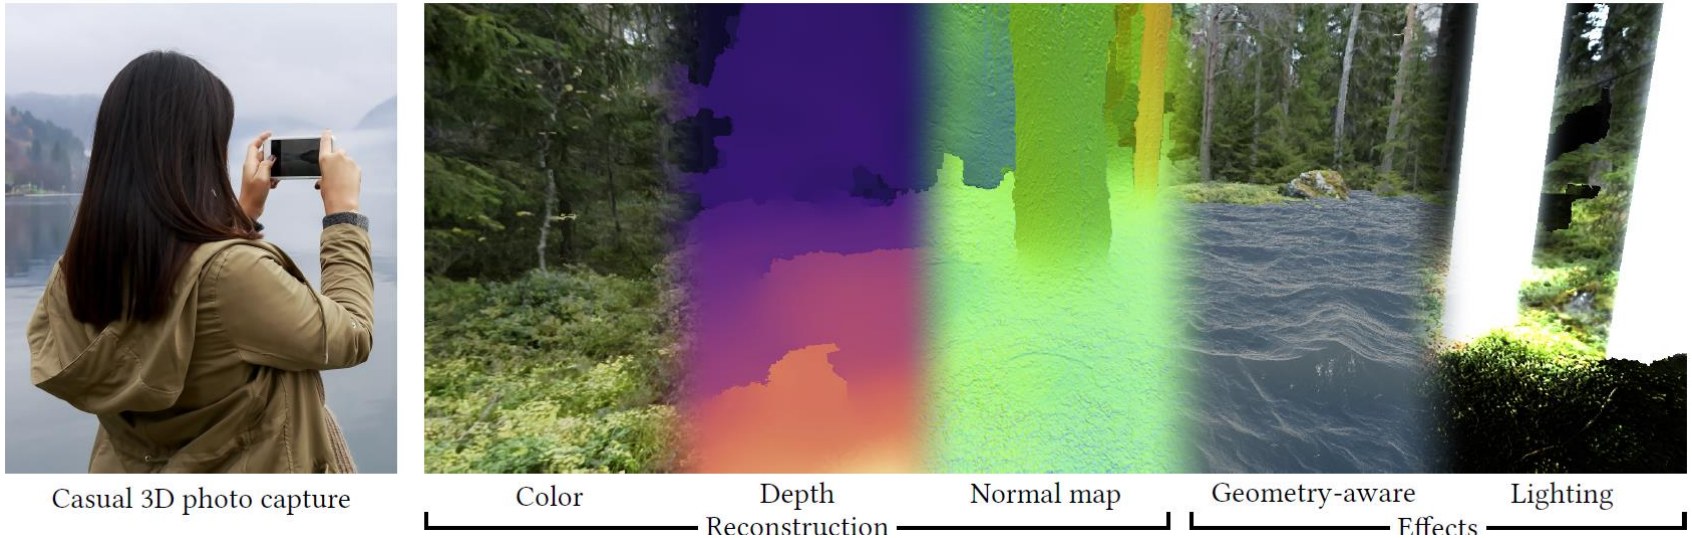

Casual 3D Photography

Peter Hedman, Suhib Alsisan, Richard Szeliski, Johannes Kopf

SIGGRAPH Asia 2017

Casual 3D Photography

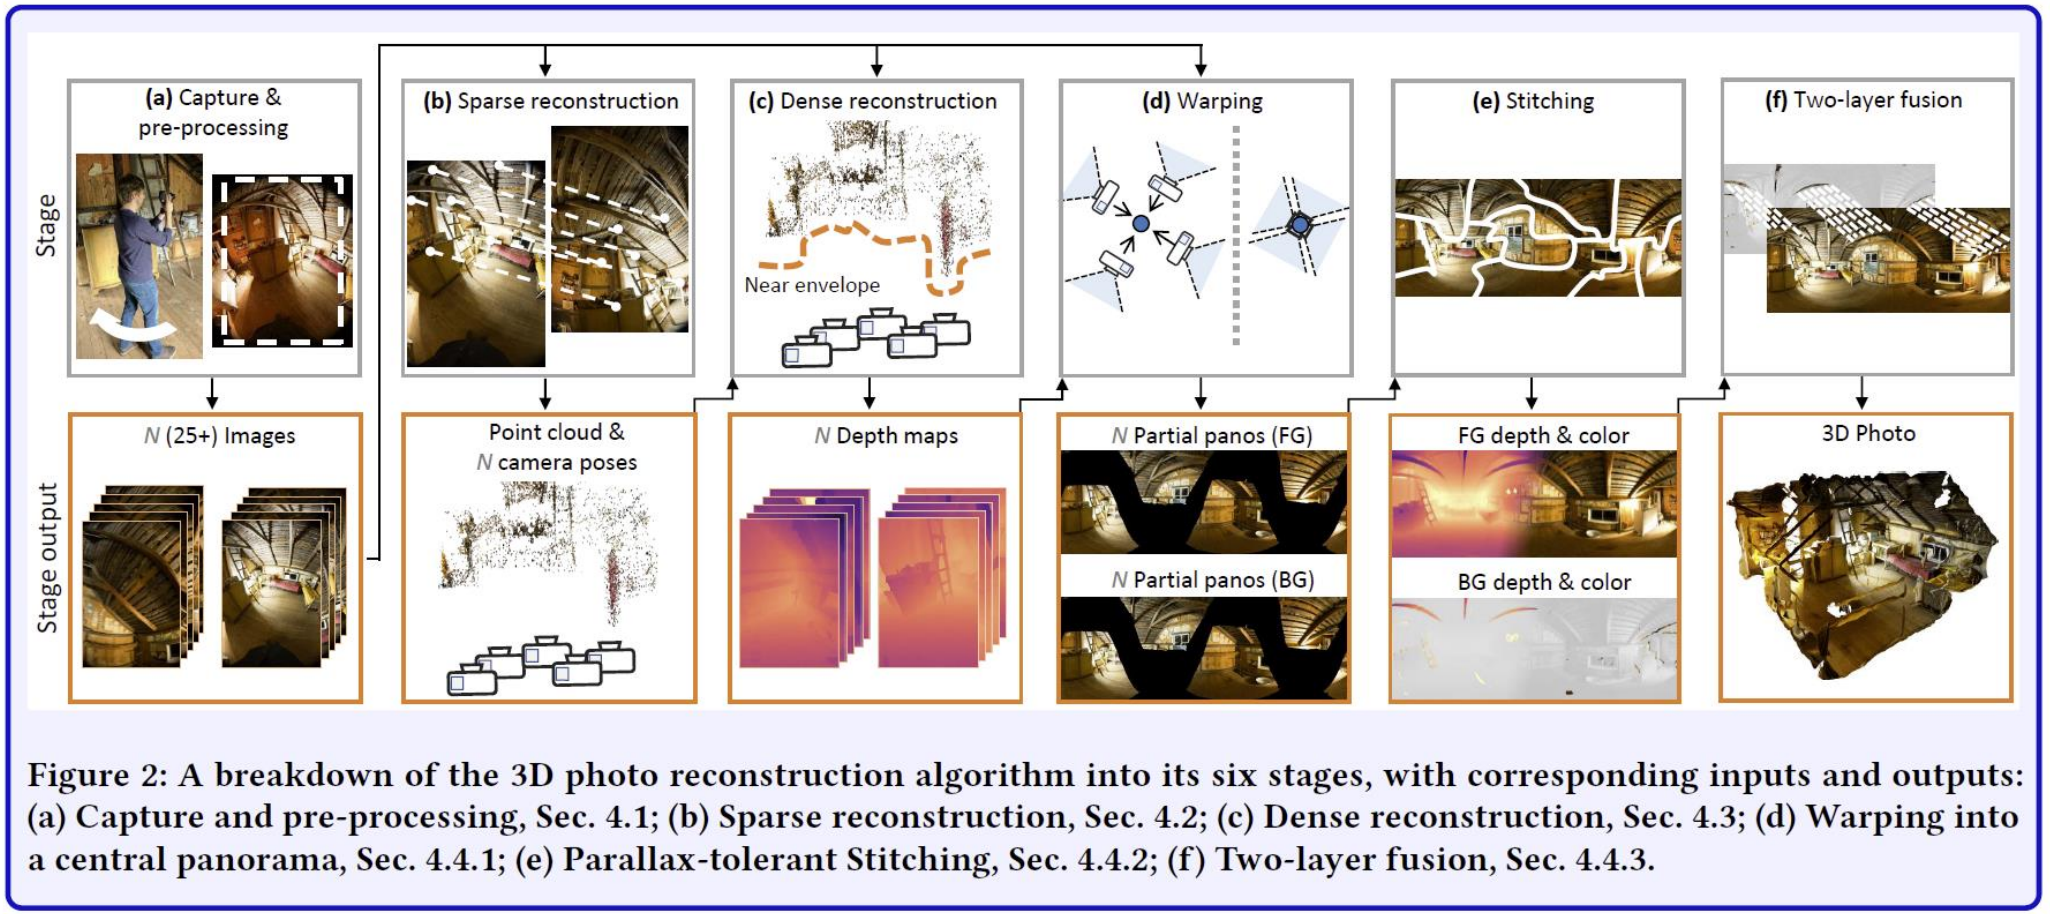

Figure 2: A breakdown of the 3D photo reconstruction algorithm into its six stages, with corresponding inputs and outputs: (a) Capture and pre-processing, Sec. 4.1; (b) Sparse reconstruction, Sec. 4.2; (c) Dense reconstruction, Sec. 4.3; (d) Warping into a central panorama, Sec. 4.4.1; (e) Parallax-tolerant Stitching, Sec. 4.4.2; (f) Two-layer fusion, Sec. 4.4.3.

Casual 3D Photography

(a) Front color-and-depth panorama

(b) Front detail

(c) Back detail

Casual 3D Photography

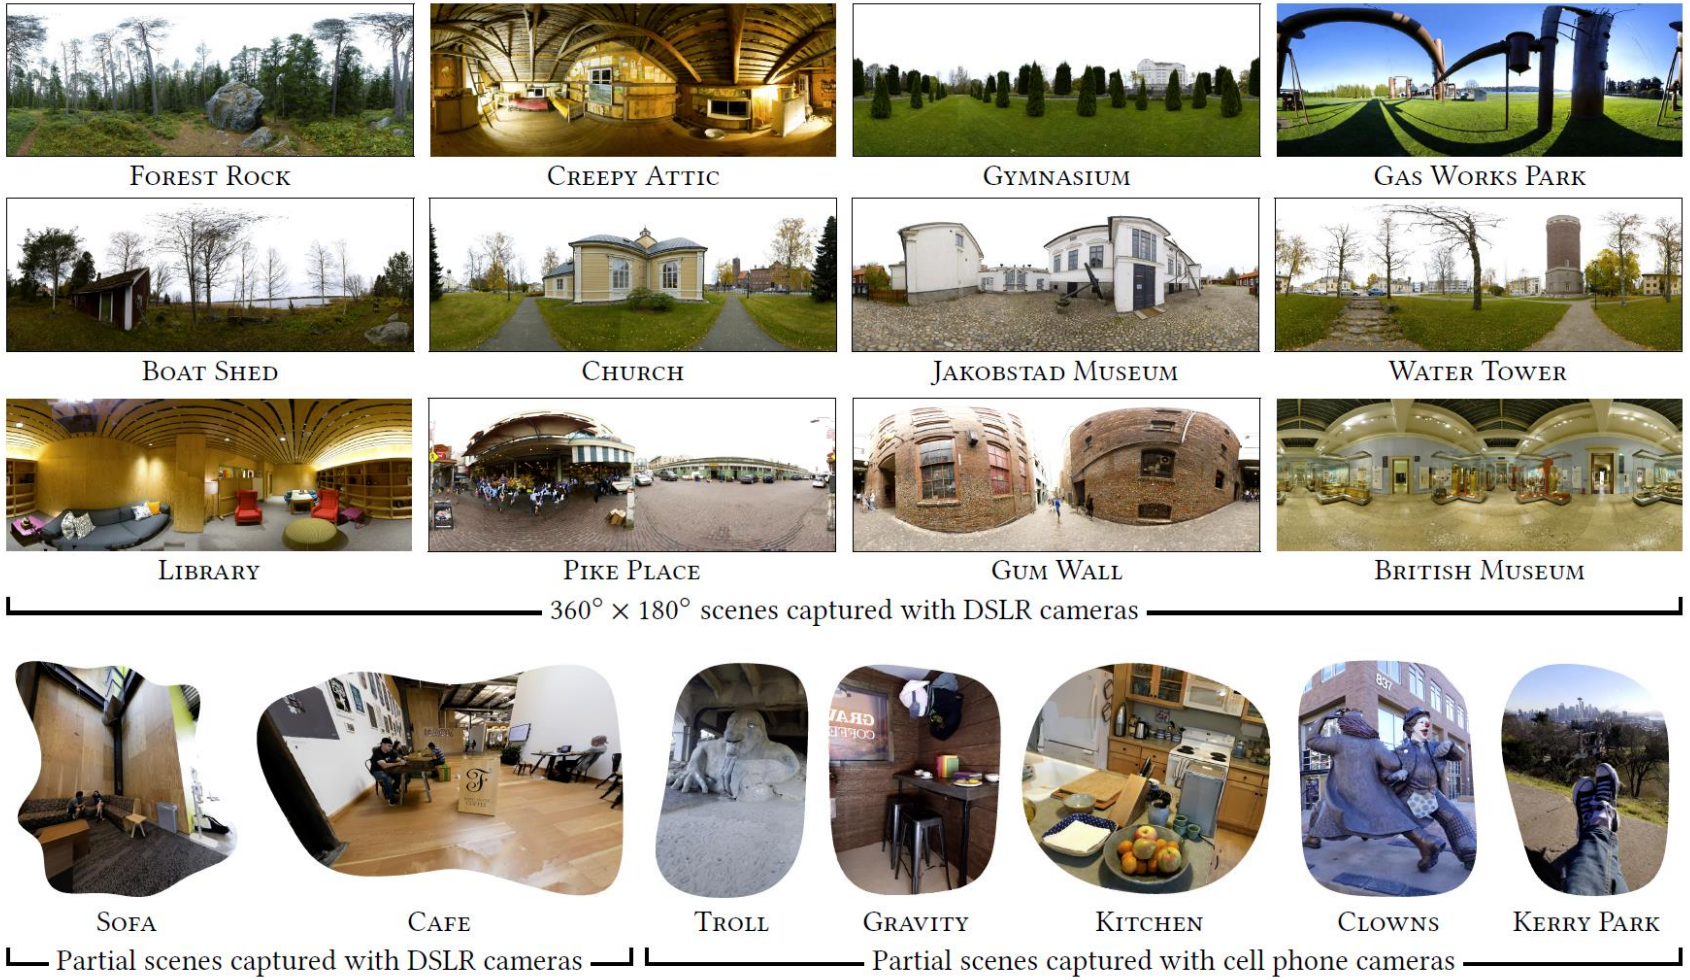

Instant 3D Photography

Peter Hedman
University College London *

Johannes Kopf
Facebook

* This work was done while Peter was working as a contractor for Facebook.

Dual camera phone

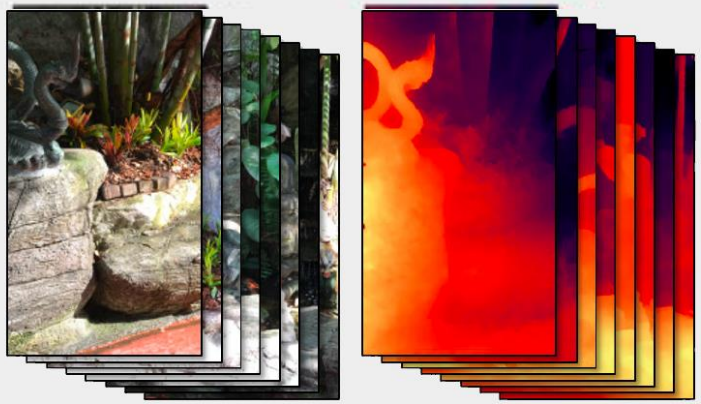

Input burst of 34 color-and-depth photos, captured in 34.0 seconds

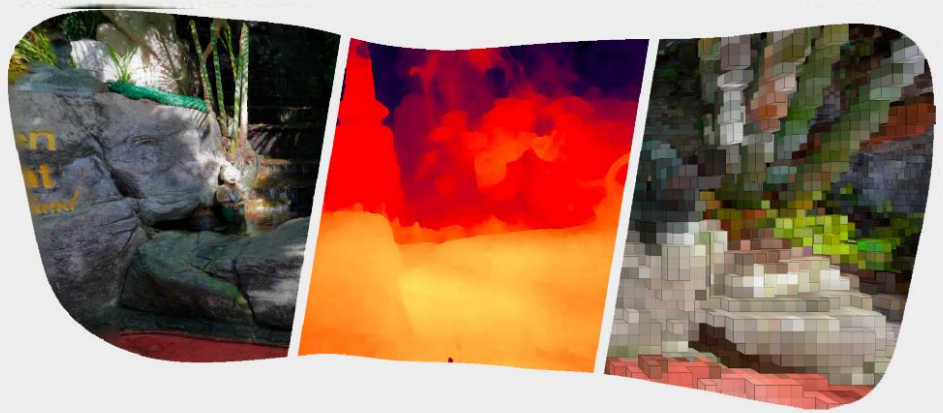

Our 3D panorama (showing color, depth, and a 3D effect), generated in 34.7 seconds.

Our work enables practical and casual 3D capture with regular dual camera cell phones. Left: A burst of input color-and-depth image pairs that we captured with a dual camera cell phone at a rate of one image per second. Right: 3D panorama generated with our algorithm in about the same time it took to capture. The geometry is highly detailed and enables viewing with binocular and motion parallax in VR, as well as applying 3D effects that interact with the scene, e.g., through occlusions (right).

Practical 3D Photography

Johannes Kopf Suhib Alsisan Francis Ge Yangming Chong Kevin Matzen
Ocean Quigley Josh Patterson Jossie Tirado Shu Wu Michael F. Cohen
Facebook

(a) Input (setup) (100 ms) | (b) LDI (inpainted color / depth) (1100 ms) | (d) Triangle Mesh (100 ms) | (e) Novel view (30fps)

Figure 1. 3D Photo Creation. Runtime measured on iPhone X.

Practical 3D Photography

Johannes Kopf, Suhib Alsisan, Francis Ge, Yangming Chong, Kevin Matzen, Ocean Quigley, Josh Patterson, Jossie Tirado, Shu Wu, Michael F. Cohen

CVPR Workshop on Computer Vision for Augmented and Virtual Reality, Long Beach, CA, 2019.

PDF

#spotlight, #demo

3D Photos on Facebook

Estimate depth map from photo to create an interactive animation

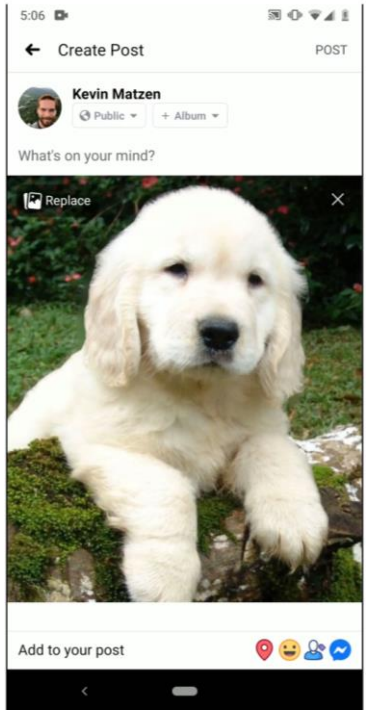

3D Photos on Facebook

Estimate depth map from photo to create an interactive animation

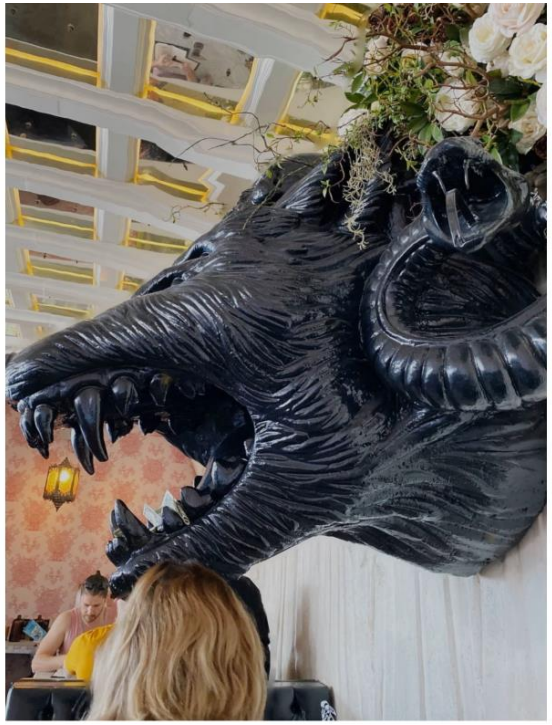

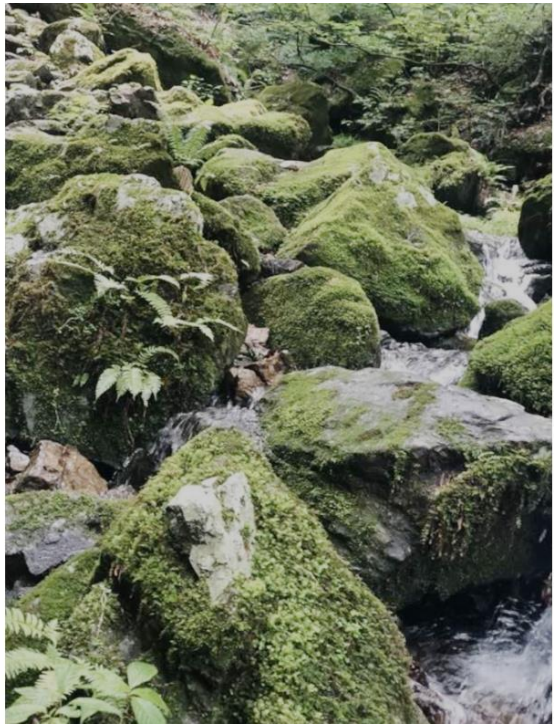

3D Photos blog post

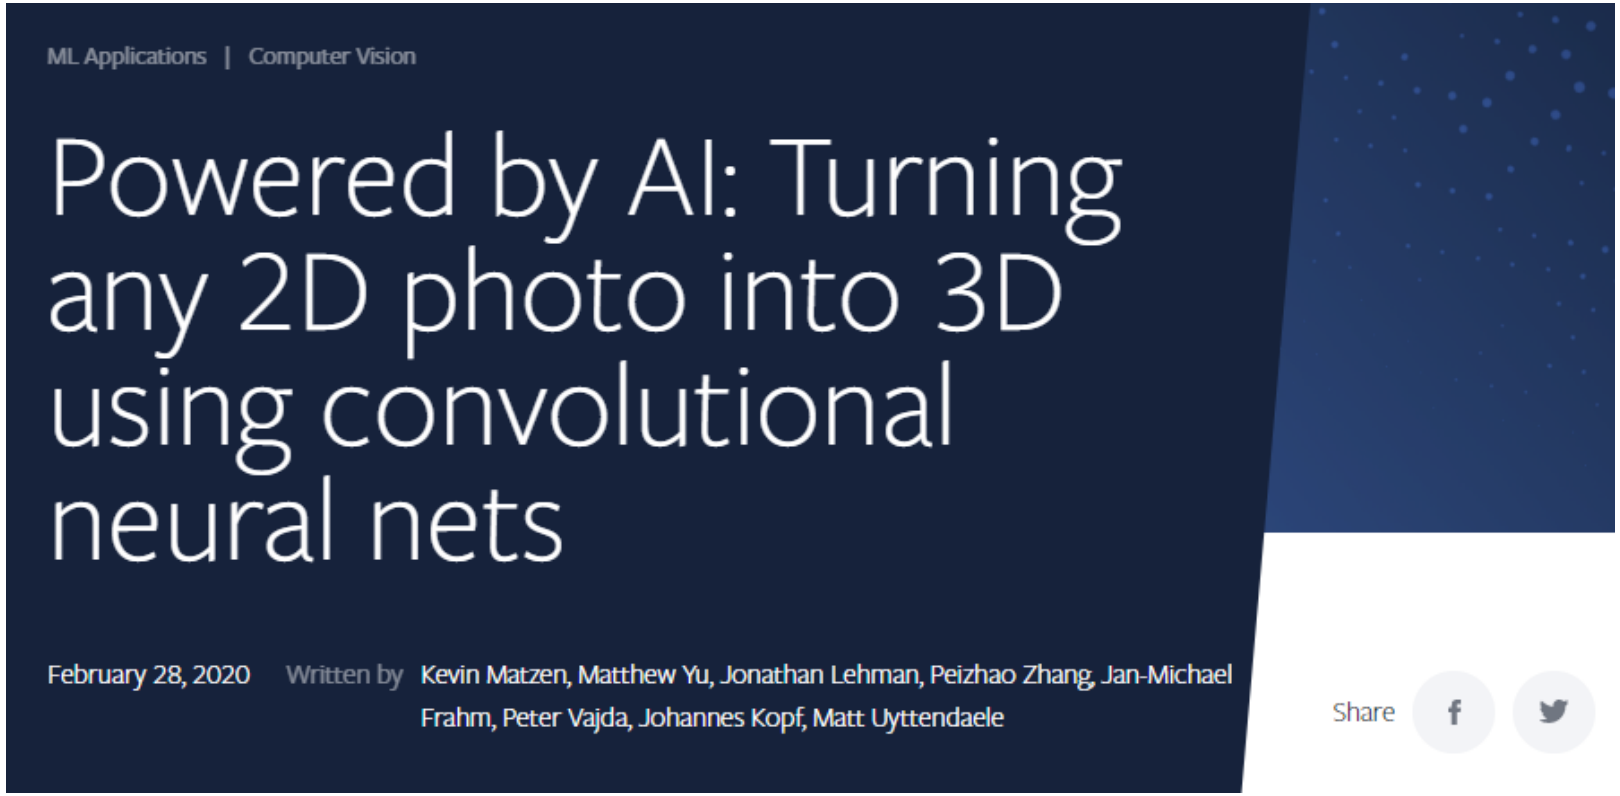

https://ai.facebook.com/blog/-powered-by-ai-turning-any-2d-photo-into-3d-using-convolutional-neural-nets/

One Shot 3D Photography

JOHANNES KOPF, KEVIN MATZEN, SUHIB ALSISAN, OCEAN QUIGLEY, FRANCIS GE, YANGMING CHONG, JOSH PATTERSON, JAN-MICHAEL FRAHM, SHU WU, MATTHEW YU, PEIZHAO ZHANG, ZIJIAN HE, PETER VAJDA, AYUSH SARAF, and MICHAEL COHEN, Facebook

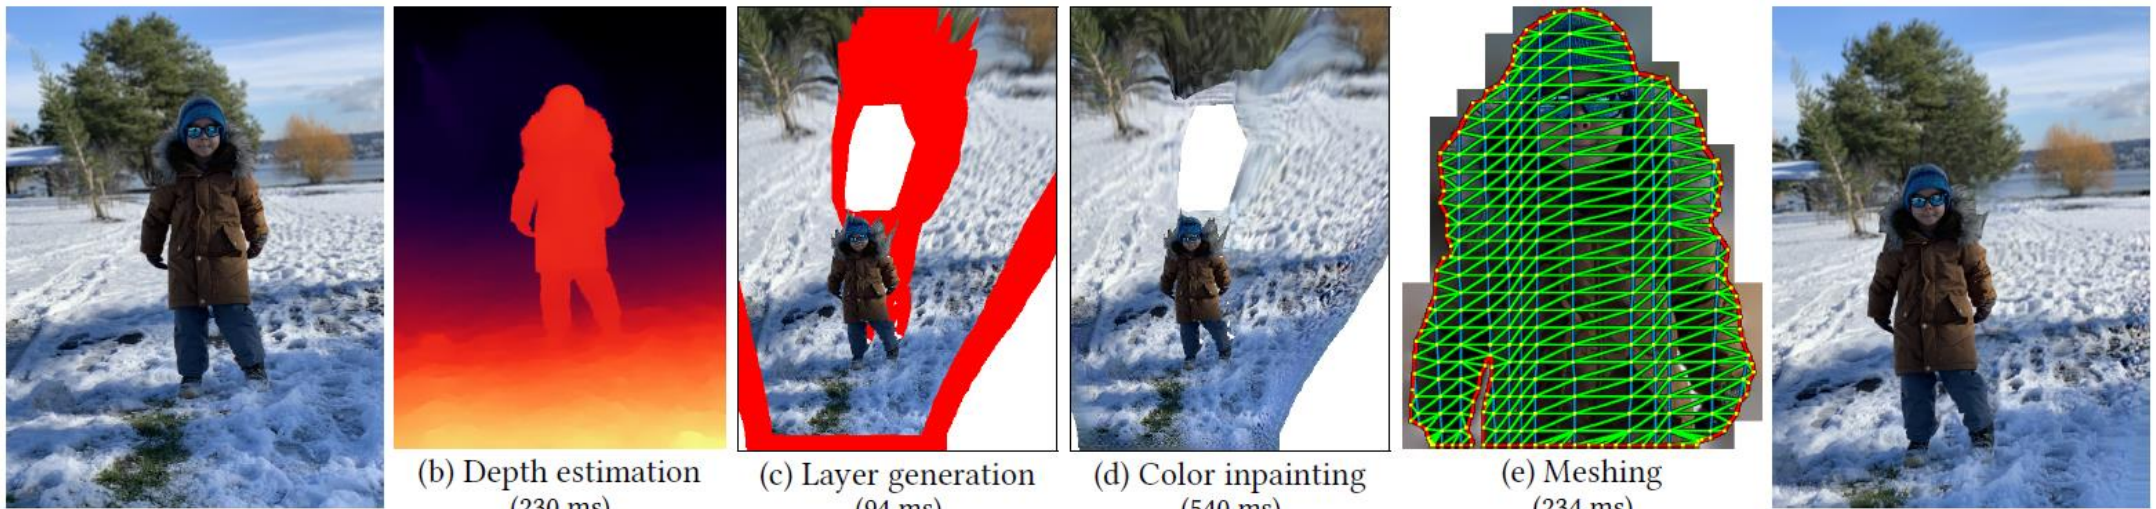

[SIGGRAPH 2020]

3D Photography using Context-aware Layered Depth Inpainting CVPR'2020

Google Photos cinematic effect

Jamie Aspinall

Product Manager, Google Photos

Published Dec 15, 2020

Relive the moment with Cinematic photos

Cinematic photos help you relive your memories in a way that feels more vivid and realistic—so you feel like you're transported back to that moment. To do this, we use machine learning to predict an image's depth and produce a 3D representation of the scene—even if the original image doesn't include depth information from the camera. Then we animate a virtual camera for a smooth panning effect—just like out of the movies.

https://blog.google/products/photos/new-cinematic-photos-and-more-ways-relive-your-memories/

What’s missing?

Reflections and Transparency

Image-Based Rendering with Reflections

- Reflections, gloss, and highlights are everywhere

- How do these affect image-based modeling / rendering?

  [Sinha *et al.*, SIGGRAPH 2012]

Standard IBR with Reflections

Our New Rendering System

Two Layers
One Layer

Our Result
Two Layers
Standard IBR
One Layer

Input

Front Depth

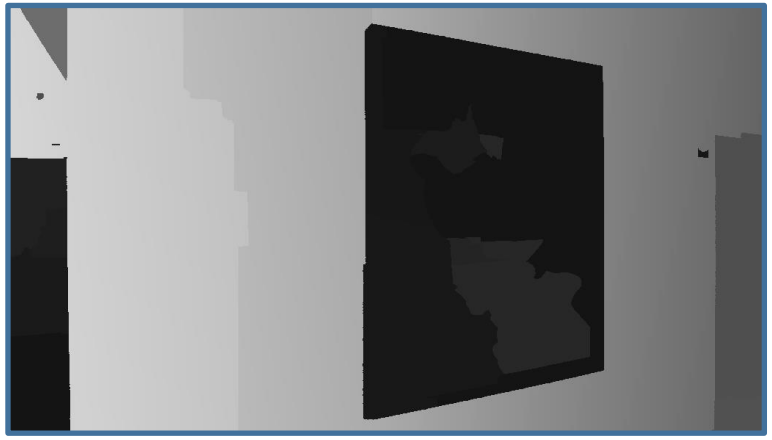

Rear Depth

Input

Front Layer

Rear Layer

Image-Based Rendering in the Gradient Domain

- Wrong depth for textureless or transparent areas

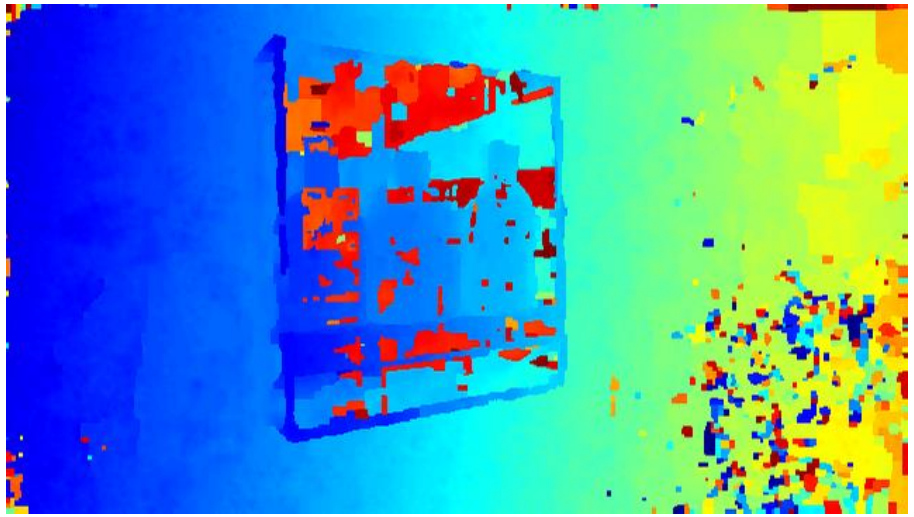

- Solve by reconstructing depth at gradients and re-integrating

  [Kopf *et al.* SIGGRAPH Asia 2013]

Overview

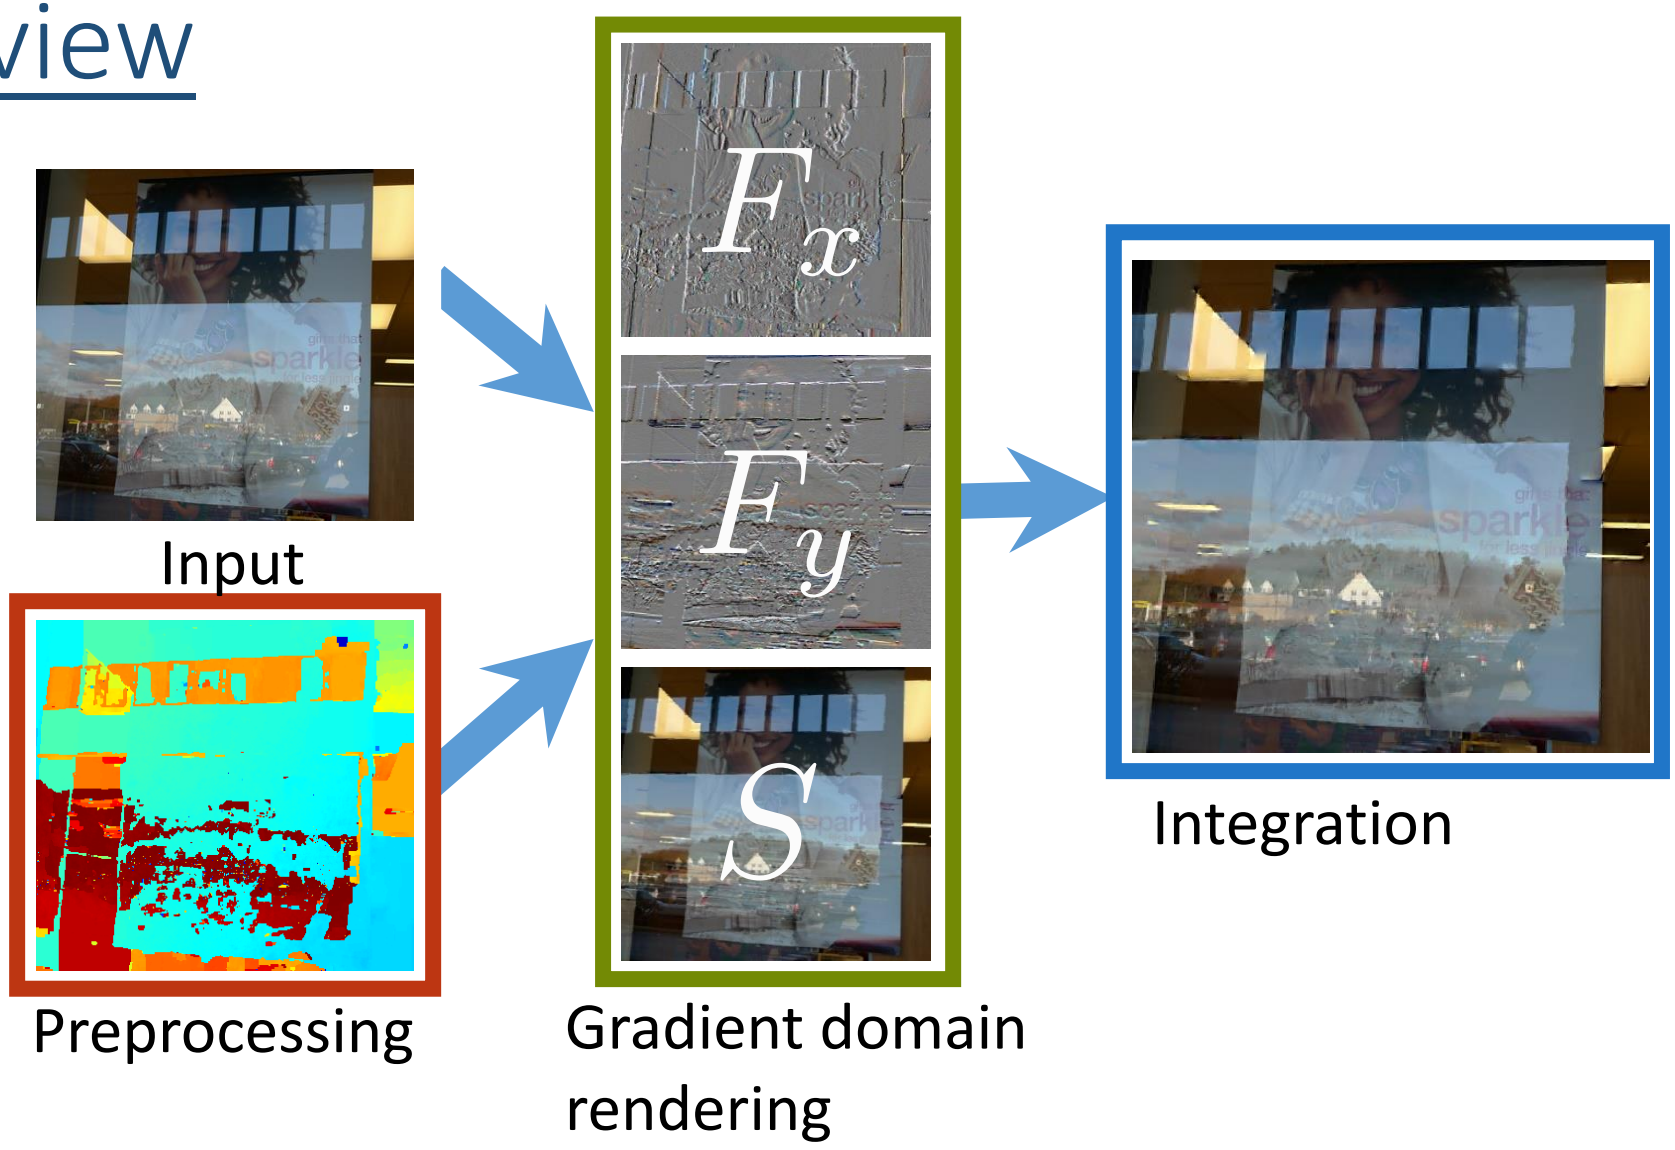
F_x
F_y
S
Input
Preprocessing
Gradient domain rendering
Integration

Gradient Domain

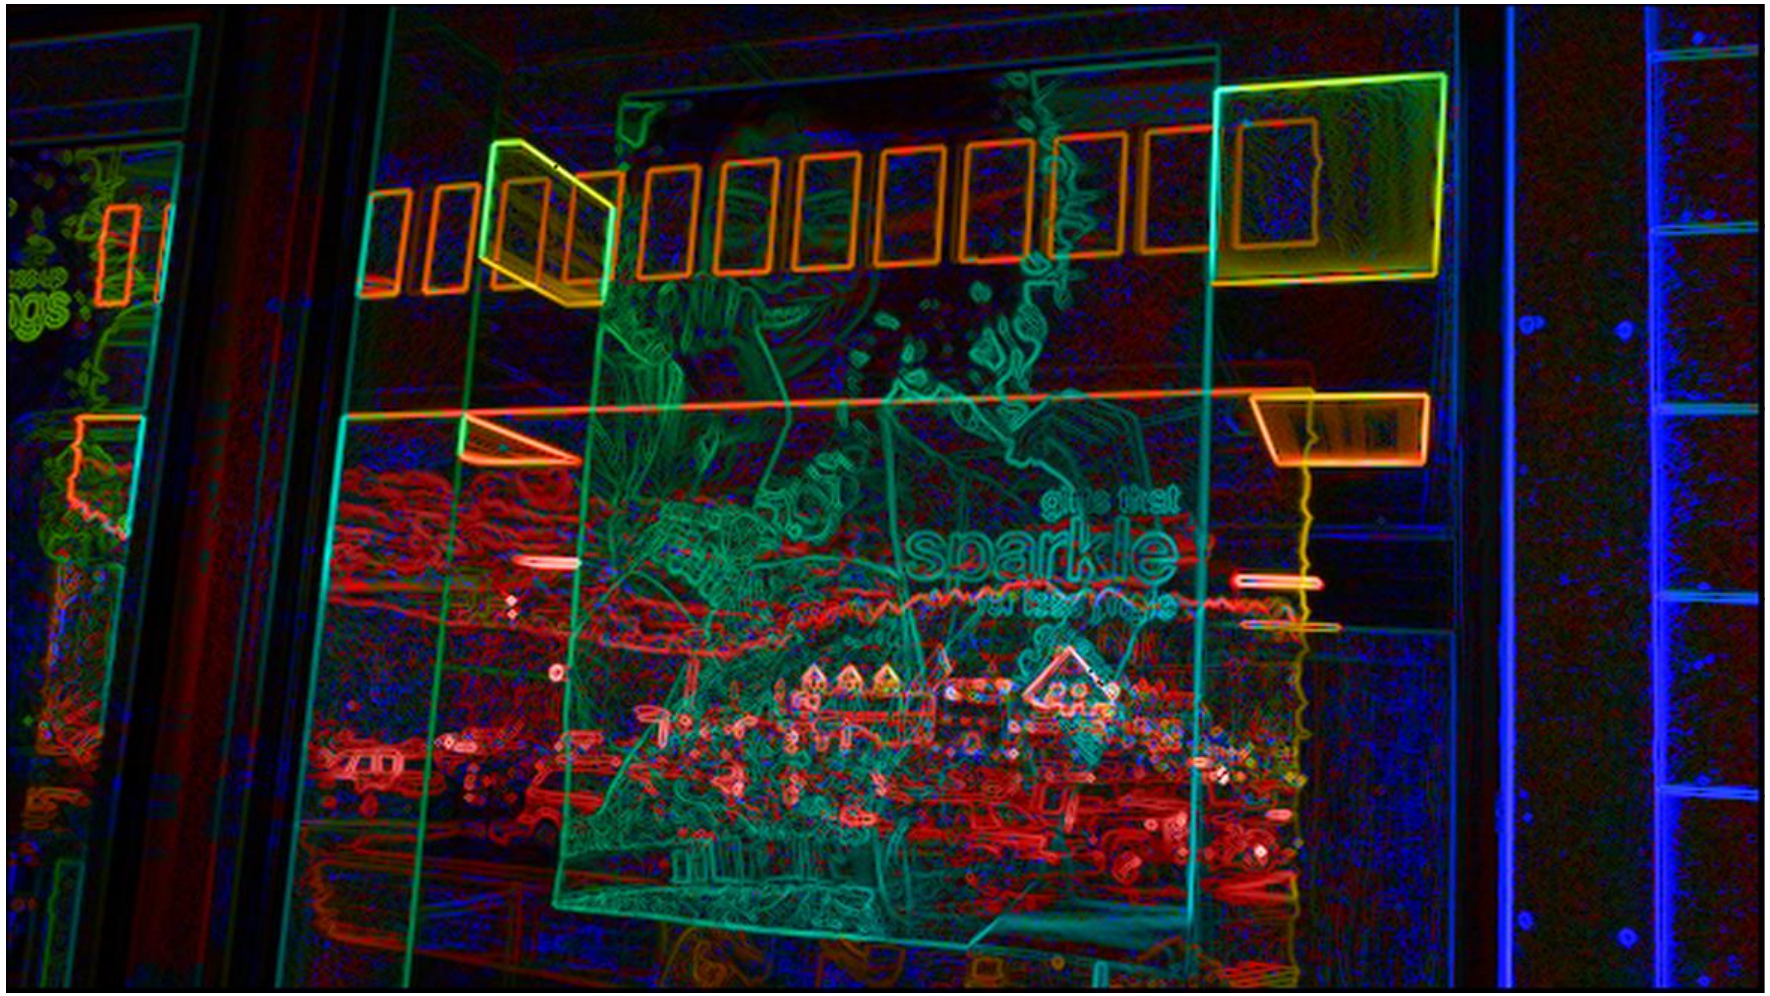

Our Method

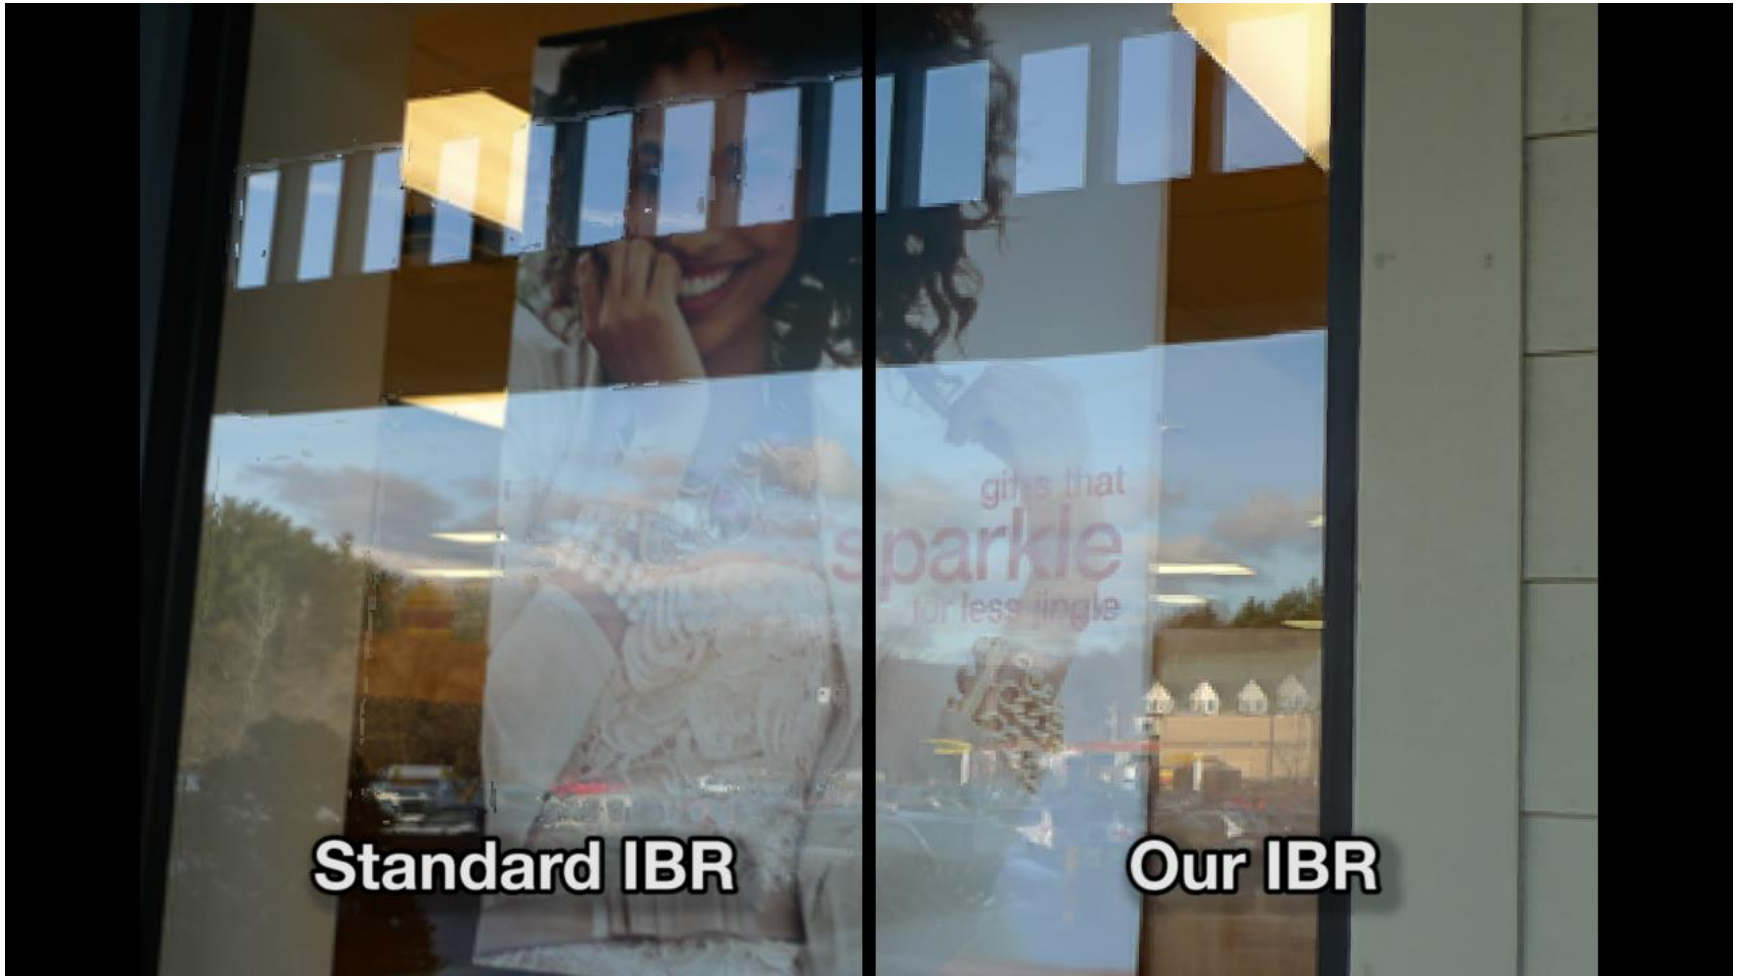

SIGGRAPH 2015

A Computational Approach for Obstruction-Free Photography

Tianfan Xue[1*] Michael Rubinstein[2*] Ce Liu[2*] William T. Freeman[1,2]

[1]MIT CSAIL [2]Google Research

* Part of this work was done while Michael Rubinstein and Ce Liu were at Microsoft Research, and when Tianfan Xue was an intern at Microsoft Research New England.

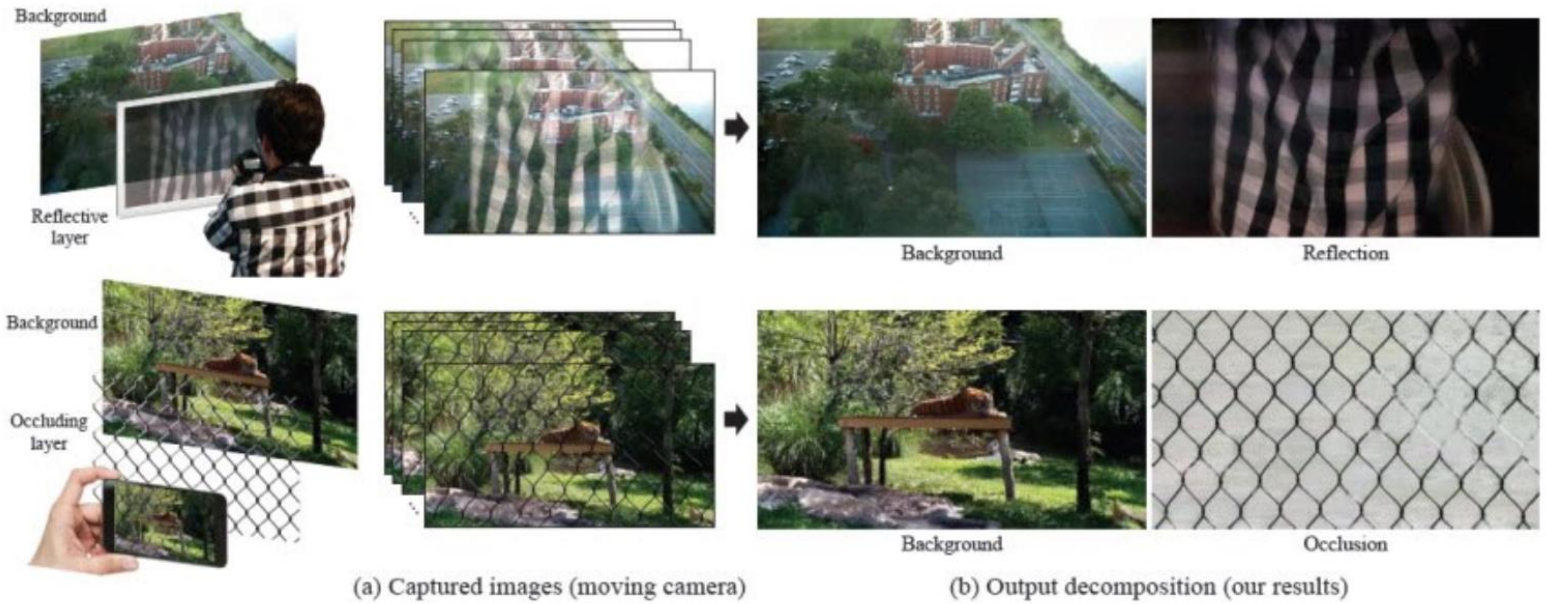

(a) Captured images (moving camera) (b) Output decomposition (our results)

Video Reflection Removal Through Spatio-Temporal Optimization

Ajay Nandoriya*[1], Mohamed Elgharib*[1], Changil Kim[2], Mohamed Hefeeda[3], and Wojciech Matusik[2]

[1]Qatar Computing Research Institute, HBKU [2]MIT CSAIL [3]Simon Fraser University

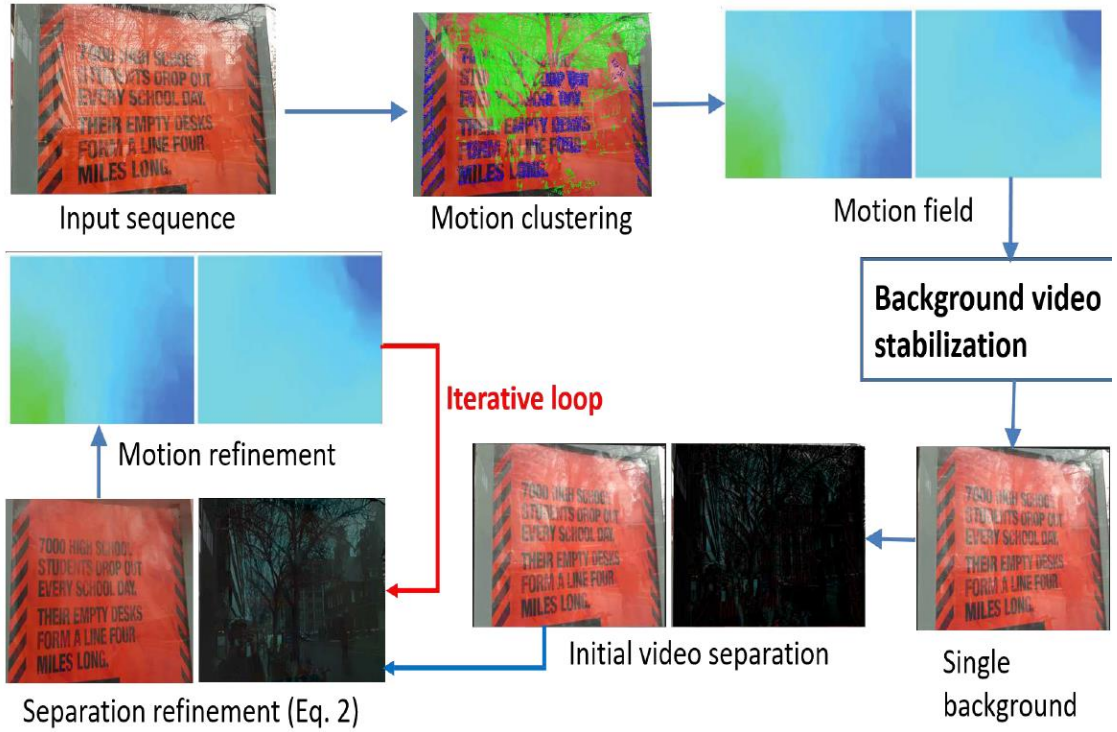

[ICCV 2017]

Reflection Removal Using a Dual-Pixel Sensor

Abhijith Punnappurath
York University
pabhijith@eecs.yorku.ca

Michael S. Brown
York University
mbrown@eecs.yorku.ca

mailto:pabhijith@eecs.yorku.ca

Abstract

Reflection removal is the challenging problem of removing unwanted reflections that occur when imaging a scene that is behind a pane of glass. In this paper, we show that most cameras have an overlooked mechanism that can greatly simplify this task. Specifically, modern DLSR and smartphone cameras use dual pixel (DP) sensors that have two photodiodes per pixel to provide two sub-aperture views of the scene from a single captured image. "Defocus-disparity" cues, which are natural by-products of the DP sensor encoded within these two sub-aperture views, can be used to distinguish between image gradients belonging to the in-focus background and those caused by reflection interference. This gradient information can then be incorporated into an optimization framework to recover the background layer with higher accuracy than currently possible from the single captured image. As part of this work, we provide the first image dataset for reflection removal consisting of the sub-aperture views from the DP sensor.

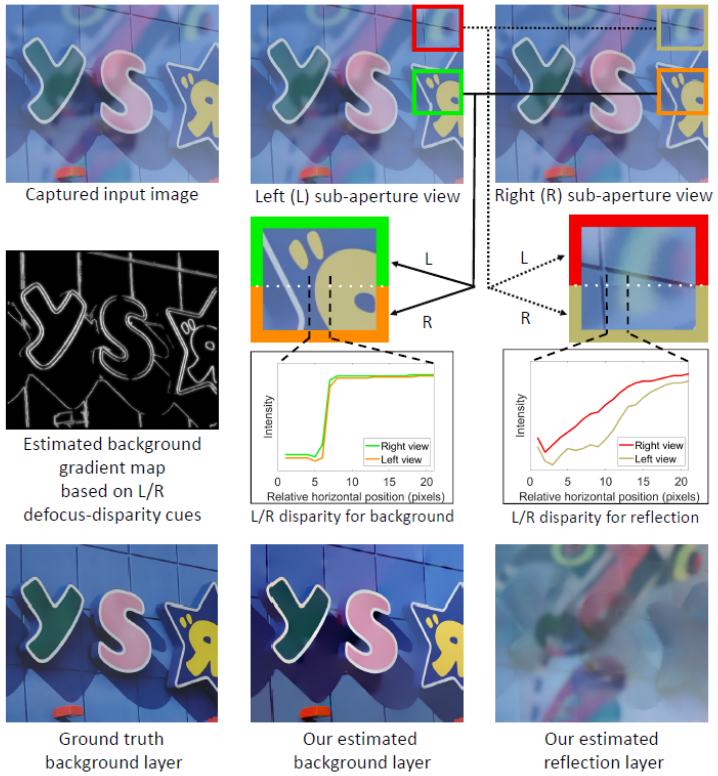

[CVPR 2019]

Open issues

- Improve stereo matching
  - Plane + parallax representation
- Reflectivity (β) estimation
  - Iterative Refinement
- Handle distorted reflections
  - [See next slide]
- Model real-valued reflectivity
  - Fresnel reflection

This ICCV2013 paper is the Open Access version, provided by the Computer Vision Foundation.
The authoritative version of this paper is available in IEEE Xplore.

Real-World Normal Map Capture for Nearly Flat Reflective Surfaces

Bastien Jacquet[1], Christian Häne[1], Kevin Köser[12*], Marc Pollefeys[1]

ETH Zürich[1]
Zürich, Switzerland

GEOMAR Helmholtz Centre for Ocean Research[2]
Kiel, Germany

Abstract

Although specular objects have gained interest in recent years, virtually no approaches exist for markerless reconstruction of reflective scenes in the wild. In this work, we present a practical approach to capturing normal maps in real-world scenes using video only. We focus on nearly planar surfaces such as windows, facades from glass or metal, or frames, screens and other indoor objects and show how normal maps of these can be obtained without the use of an artificial calibration object. Rather, we track the reflections of real-world straight lines, while moving with a hand-held

Figure 1. Real-world glass reflection. Notice that reflection in different windows on the same facade can appear very different due to minor deformations and normal variations. Our goal is to capture normal maps of real windows to faithfully reproduce this effect.

Neural Rendering

TUM AI Lecture series

Photorealistic Telepresence

Yaser Sheikh
Facebook Reality Labs

Pushing Factor Graphs beyond SLAM

Frank Dellaert
Georgia Tech, Google

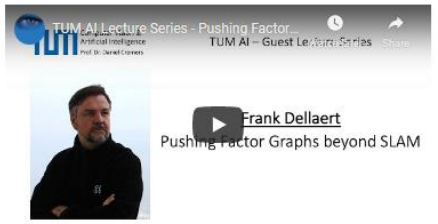

Sights, sounds, and space: Audio-visual learning in 3D environments

Kristen Grauman
University of Texas, Facebook AI Research

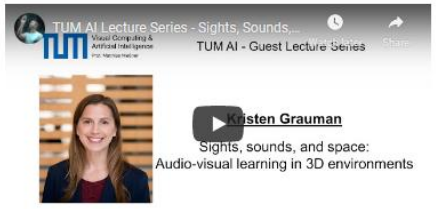

Controllable Content Generation without Direct Supervision

Niloy Mitra
University College London, Adobe Research

New methods for Reconstruction and Neural Rendering of Real World Scenes

Christian Theobalt
MPI for Informatics, Saarland University

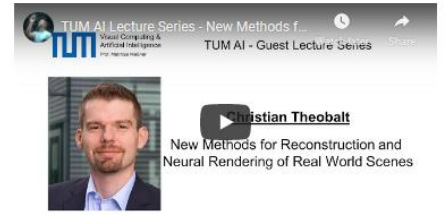

Learning to Retime People in Videos



Tali Dekel
Google, Weizmann Institute of Science

TUM AI Lecture series

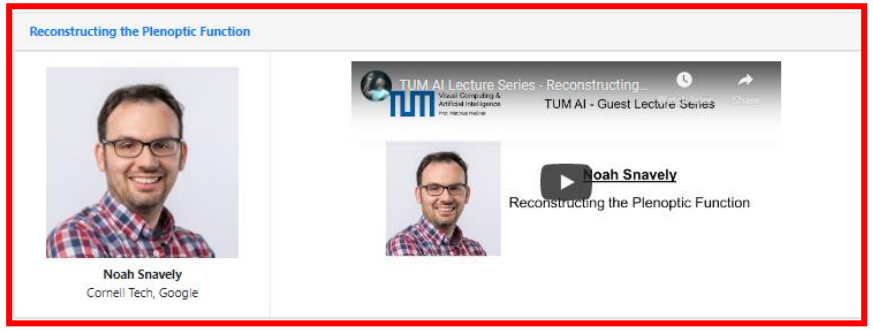

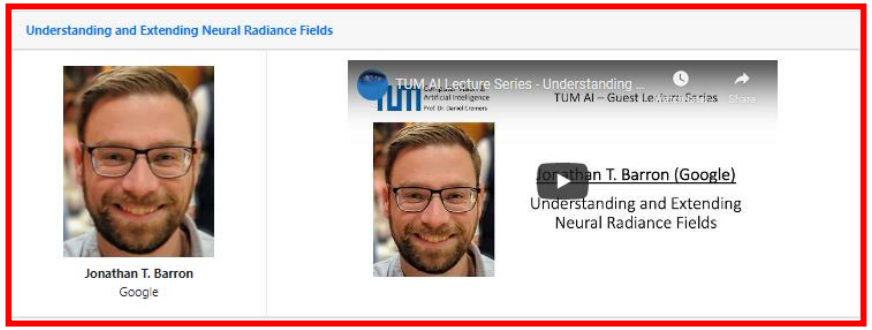

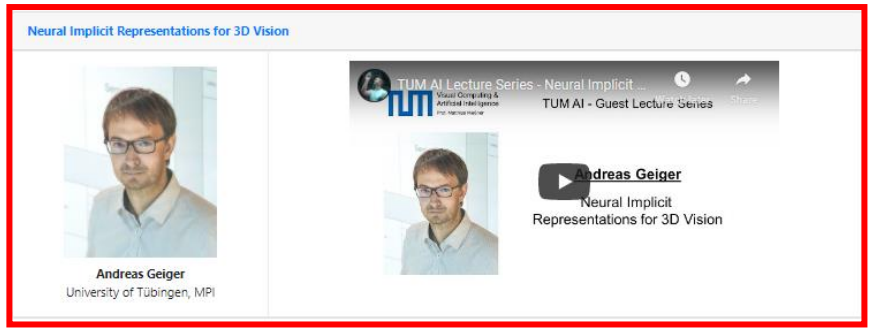

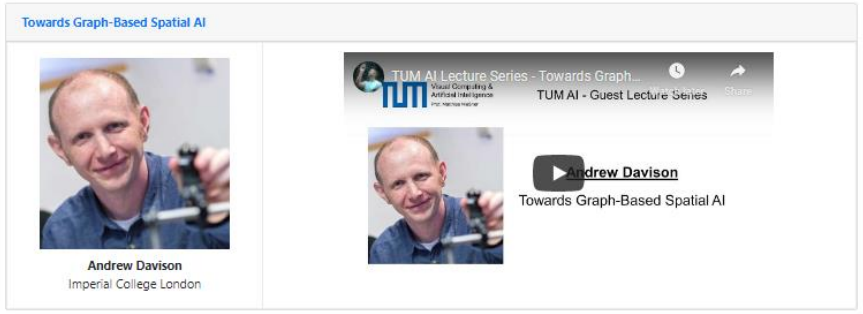

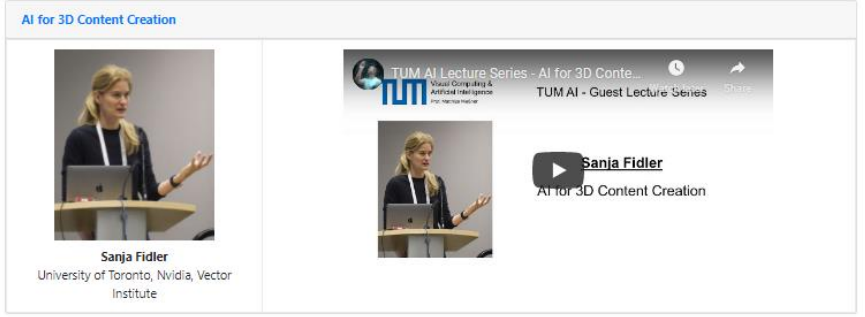

TUM AI Lecture series

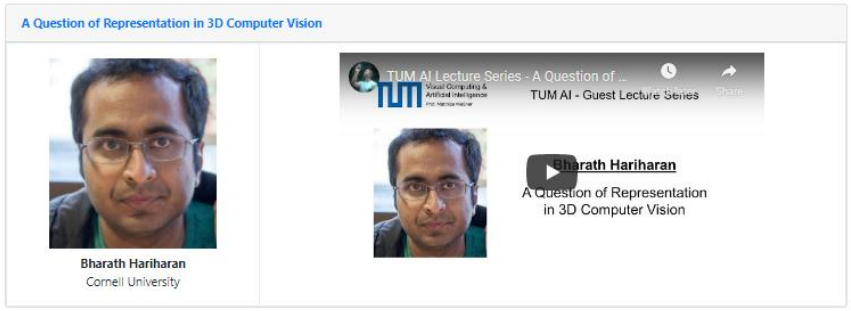

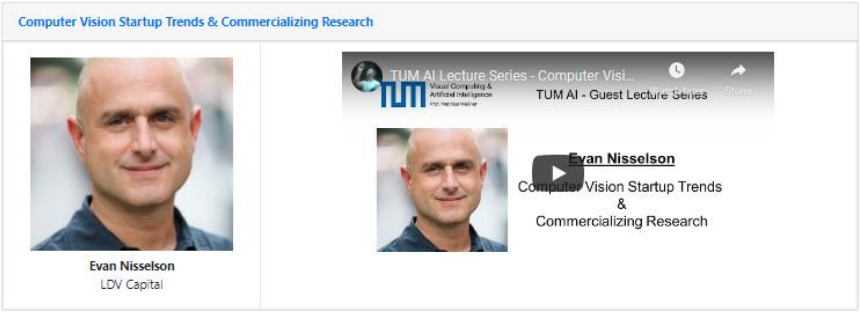

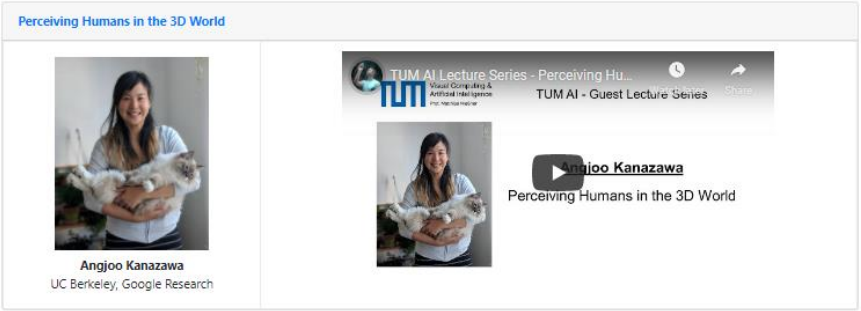

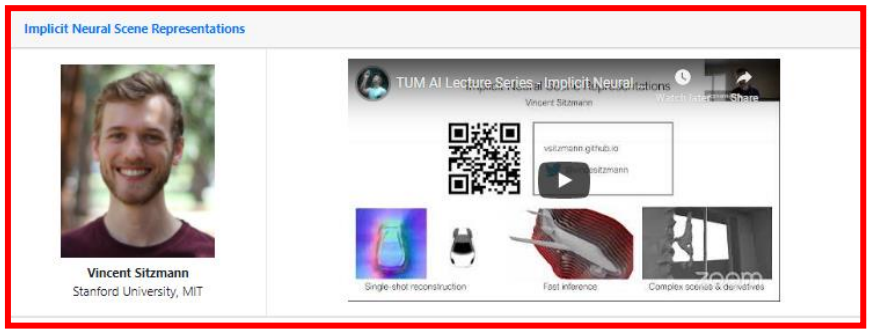

Neural Rendering

CVPR 2020 tutorial.

09:00–09:15	Welcome and Introduction	Michael Zollhöfer
09:15–09:30	Fundamentals, Taxonomy, Neural Rendering	Ayush Tewari
Semantic Photo Synthesis and Manipulation		
09:30–09:40	Overview	Jun-Yan Zhu
09:40–10:00	Semantic Image Synthesis with Spatially-Adaptive Normalization	Taesung Park
10:00–10:30	Coffee Break	
Facial Reenactment & Body Reenactment		
10:25–10:35	Overview	Justus Thies
10:35–11:00	Neural Rendering for High-Quality Synthesis of Human Portrait Video and Images	Christian Theobalt
11:00–11:20	Neural Rendering for Virtual Avatars	Aliaksandra Shysheya
Novel View Synthesis		
11:20–11:35	Overview	Vincent Sitzmann
11:30–11:50	Neural Rerendering in the Wild	Moustafa Meshry
11:50–12:10	NeRF: Representing Scenes as Neural Radiance Fields for View Synthesis	Ben Mildenhall
12:10–13:20	Lunch Break	
Learning to Relight		
13:20–13:30	Overview	Zexiang Xu
13:30–13:50	Multi-view Relighting Using a Geometry-Aware Network	Julien Philip
13:50–14:10	Neural Inverse Rendering	Abhimitra Meka
Free Viewpoint Videos		
14:10–14:20	Overview	Sean Fanello
14:20–14:40	Neural Rendering for Performance Capture	Rohit K. Pandey
14:40–15:00	Neural Volumes: Learning Dynamic Renderable Volumes from Images	Stephen Lombardi
15:00–15:30	Coffee Break	
15:30–15:45	Social Implications, Open Challenges, Conclusion	Ohad Fried
15:45–16:15	Followup Discussion	

3D representations for neural rendering

- 3D models & textures

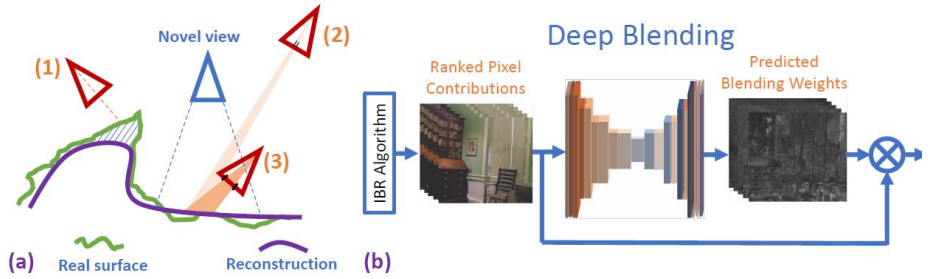

- Voxels

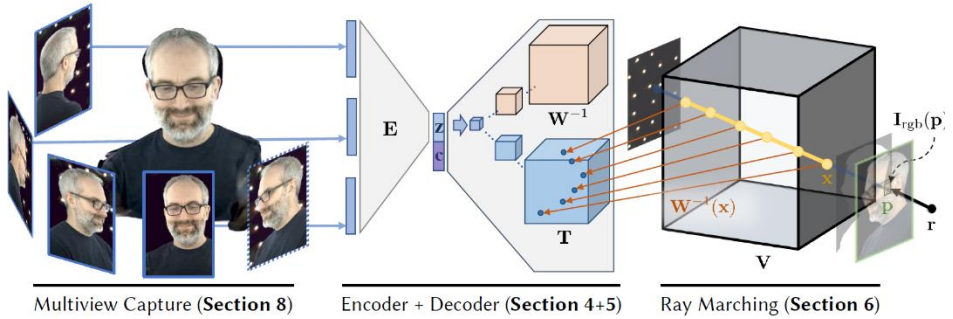

- Depth images and layers

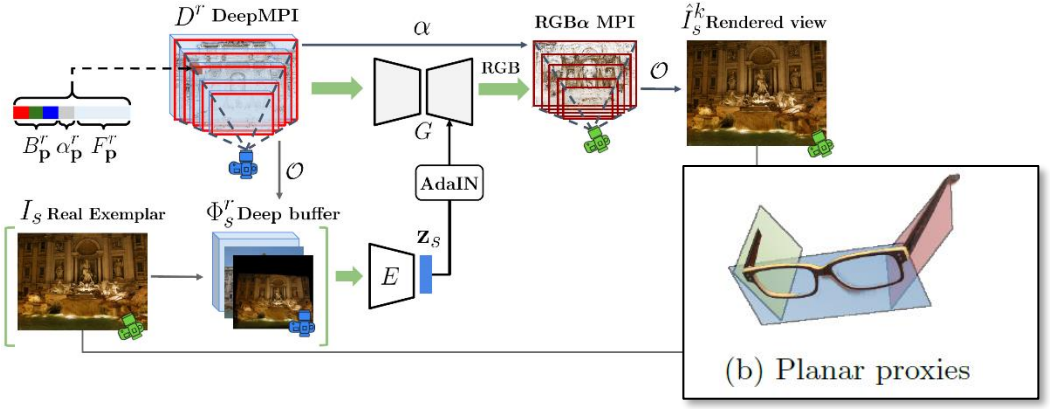

- Implicit functions (MLPs)

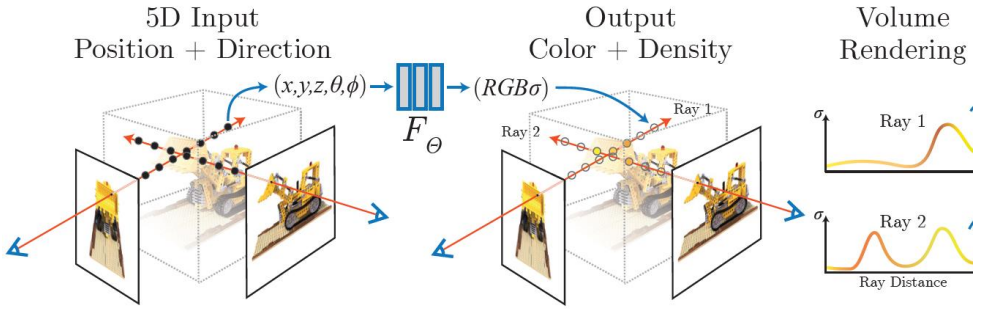

SynSin: view synthesis from a single image

SynSin: End-to-end View Synthesis from a Single Image

Olivia Wiles[1]* Georgia Gkioxari[2] Richard Szeliski[3] Justin Johnson[2,4]

[1]University of Oxford [2]Facebook AI Research [3]Facebook [4]University of Michigan

Figure 1: **End-to-end view synthesis.** Given a *single* RGB image (red), SynSin generates images of the scene at new viewpoints (blue). SynSin predicts a 3D point cloud, which is projected onto new views using our differentiable renderer; the rendered point cloud is passed to a GAN to synthesise the output image. SynSin is trained end-to-end, without 3D supervision.



SynSin: view synthesis from a single image

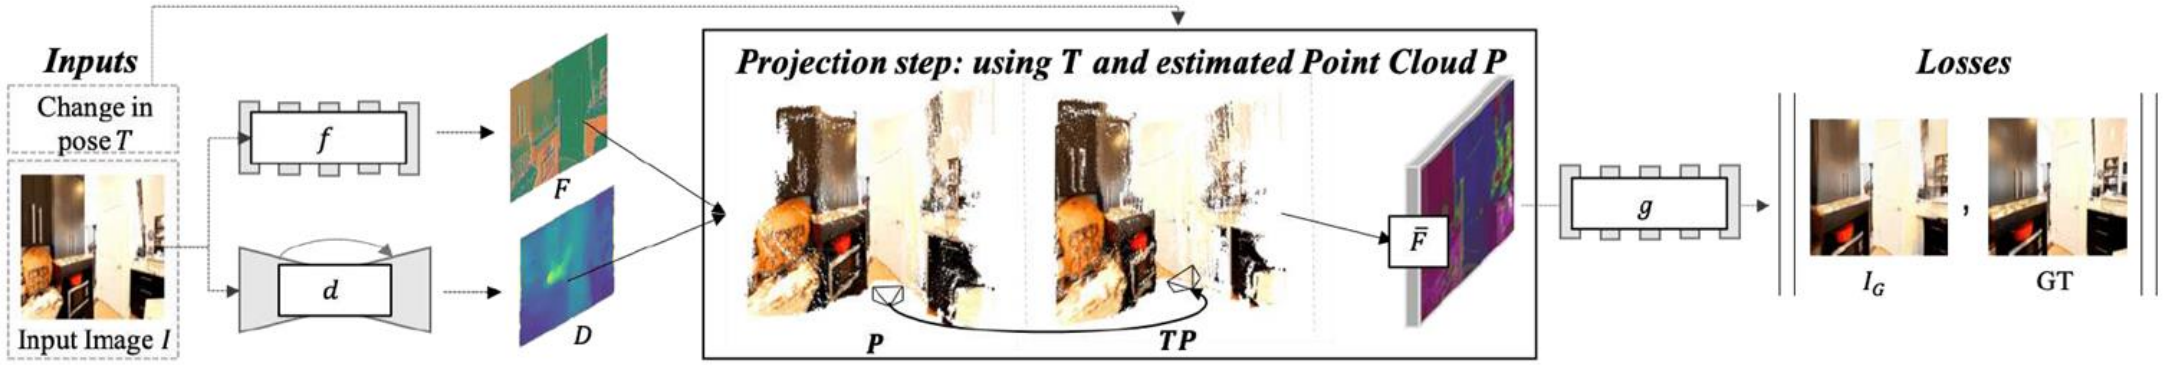

Figure 2: **Our end-to-end system.** The system takes as input an image I of a scene and change in pose T. The *spatial feature predictor* (f) learns a set of features F (visualised by projecting features using PCA to RGB) and the *depth regressor* (d) a depth map D. F are projected into 3D (the diagram shows RGB for clarity) to give a point cloud $\mathcal{P}$ of features. $\mathcal{P}$ is transformed according to T and rendered. The rendered features $\bar{F}$ are passed through the *refinement network* (g) to generate the final image I_G. I_G should match the target image, which we enforce using a set of discriminators and photometric losses.

SynSin: view synthesis from a single image

Animating Pictures

Animating Pictures with Eulerian Motion Fields

Aleksander Holynski[1], Brian Curless[1], Steven M. Seitz[1], Richard Szeliski[2]
[1]University of Washington, [2]Facebook

Paper | arXiv | Video | Code (coming soon)

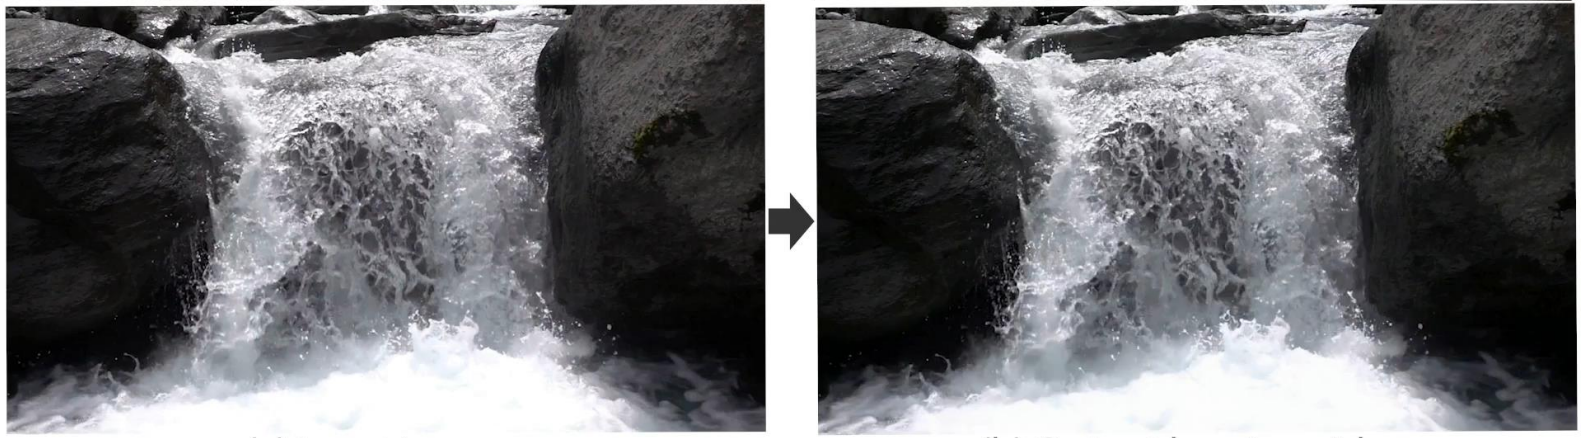

(a) Input image (b) Output looping video

https://eulerian.cs.washington.edu/

Animating Pictures

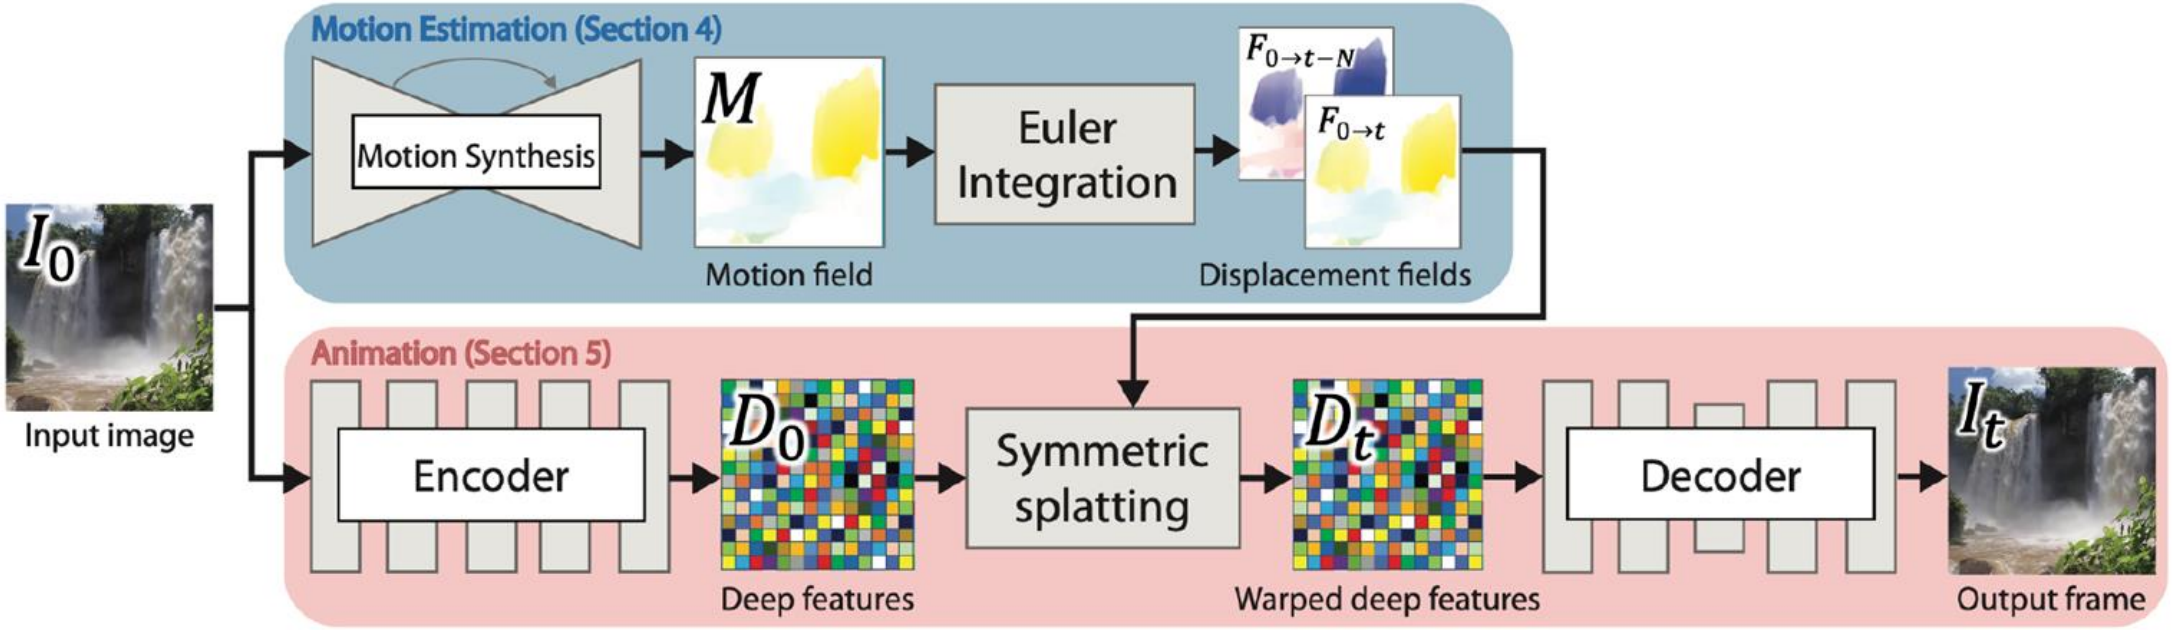

Figure 2: **Overview:** Given an input image I_0, our motion estimation network predicts a motion field M. Through Euler integration, M is used to generate future and past displacement fields $F_{0\to t}$ and $F_{0\to t-N}$, which define the source pixel locations in all other frames t. To animate the input image using our estimated motion, we first use a feature encoder network to encode the image as a feature map D_0. This feature map is warped by the displacement fields (using a novel symmetric splatting technique) to produce the corresponding warped feature map D_t. The warped features are provided to the decoder network to create the output video frame I_t.

Animating Pictures

Animating Pictures

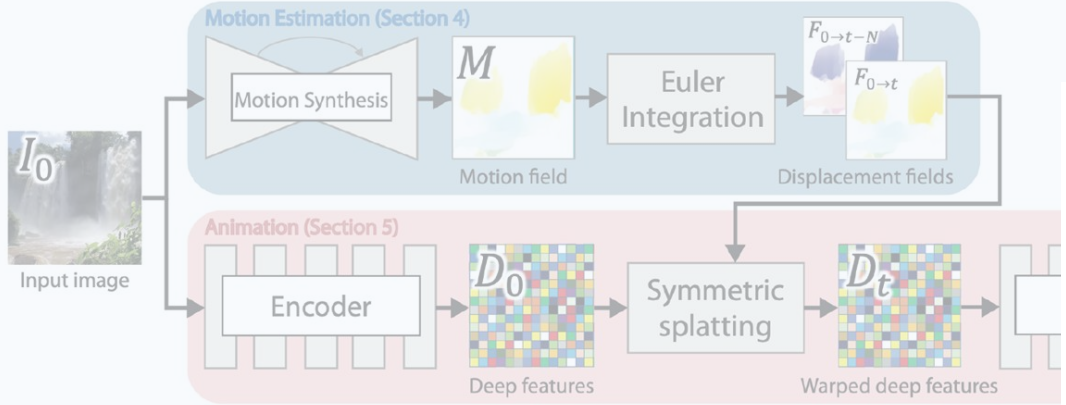

Figure 2: **Overview:** Given an input image I_0, our motion estimation network predicts a motion field I is used to generate future and past displacement fields $F_{0\to t}$ and $F_{0\to t-N}$, which define the source pi To animate the input image using our estimated motion, we first use a feature encoder network to encoc This feature map is warped by the displacement fields (using a novel symmetric splatting technique) to p feature map D_t. The warped features are provided to the decoder network to create the output video fra

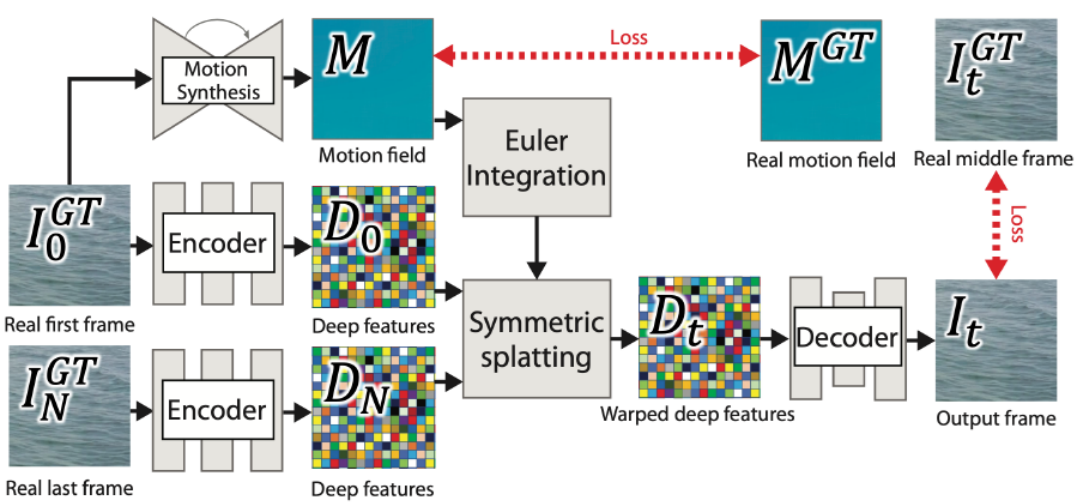

Figure 5: **Training:** As described in Section 5.1, each frame in our generated looping video is composed of textures from two warped frames. To supervise this process during training, i.e., to have a real frame to compare against, we perform our symmetric splatting using the features from two different frames, I_0 and I_N (instead of I_0 twice, as in inference). We enforce the motion field M to match

… wrapping up …

Outline

- Multi-view stereo
- Image-Based Rendering
  - Lumigraphs, Light Fields, Sprites with Depth, and Layers
- Virtual Viewpoint Video
- 360° and 3D Video
- 3D Photos
- Reflections and transparency
- Neural rendering

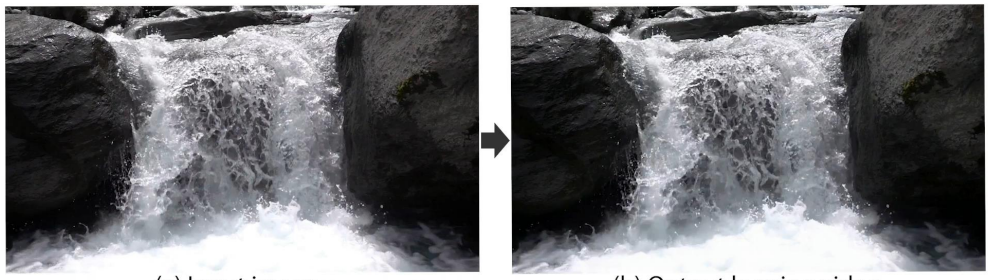

(a) Input image (b) Output looping video

TEXTS IN COMPUTER SCIENCE
Computer Vision
Algorithms and Applications
Second Edition
Richard Szeliski
Springer

Thank you